


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
PLANS FOR PROPOSED

SURFACE TRANSPORTATION PROGRAM

FAS ROUTE 946 (MILLER CITY ROAD)
SECTION 05-00074-00-RS
PROJECT # ACRS-946 (106)
JOB NO. C-99-532-05

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FAS 946	05-00074-00-RS	ALEXANDER	15	1
PROJECT NO. RS-946 (106)			CONTRACT NO. 99287	


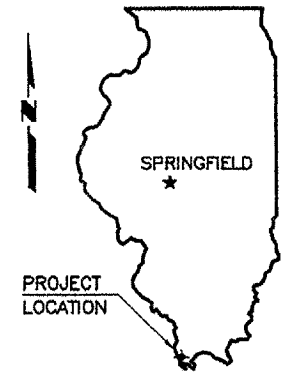


SUMMARY OF QUANTITIES

CODE NO.	PAY ITEM	UNIT	TOTAL
40200800*	AGGREGATE SURFACE COURSE, TYPE B	TON	80
40600100	BITUMINOUS MATERIALS (PRIME COAT)	GALLON	6,180
40600635	LEVELING BINDER (MACHINE METHOD), N70	TON	4,770
40603315	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N70	TON	4,340
48101200	AGGREGATE SHOULDERS, TYPE B	TON	2,230
67100100*	MOBILIZATION	L SUM	1
70300100	SHORT-TERM PAVEMENT MARKING	FOOT	4,732
70300220	TEMPORARY PAVEMENT MARKING - LINE 4"	FOOT	63,110
72000100	SIGN PANEL - TYPE 1	SQ FT	89.2
72800100	TELESCOPING STEEL SIGN SUPPORT	FOOT	448
▲ 78001110	PAINT PAVEMENT MARKING - LINE 4"	FOOT	63,110
▲ 78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	298
▲ 78100105	RAISED REFLECTIVE PAVEMENT MARKER (BRIDGE)	EACH	1

* SEE SPECIAL PROVISIONS
▲ SPECIALTY ITEMS

ALEXANDER COUNTY

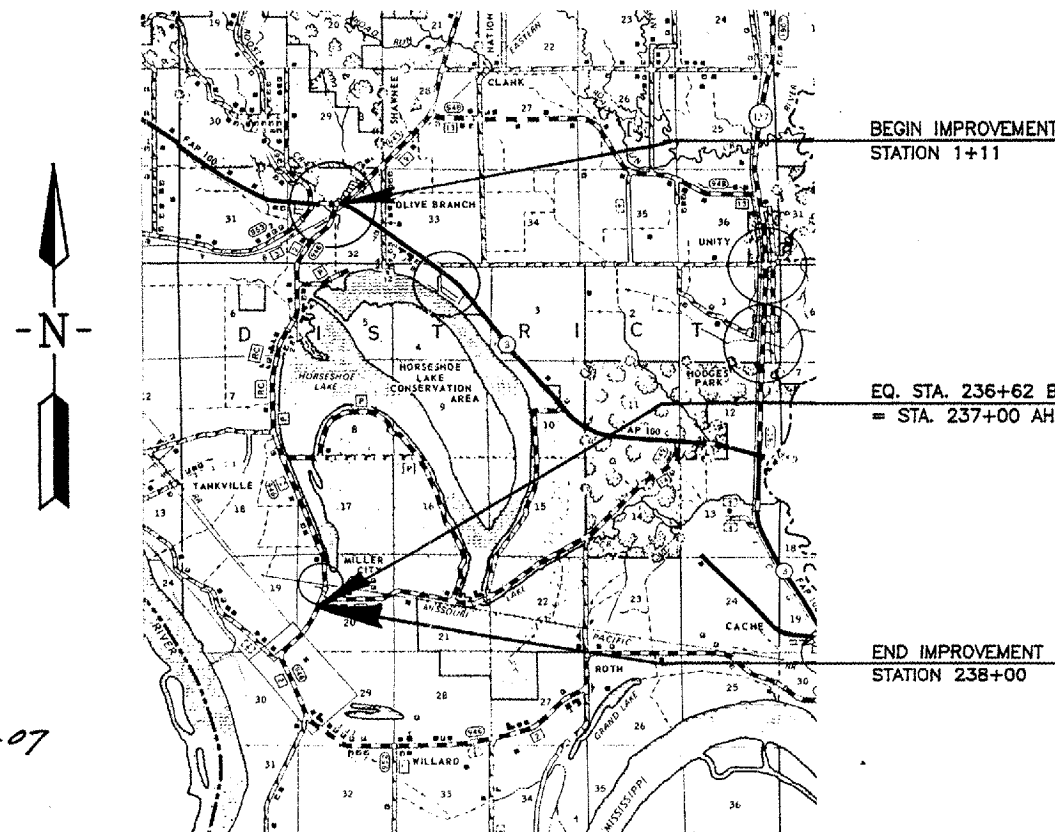

INDEX OF SHEETS


1. COVER SHEET
 2. TYPICAL SECTIONS
 3. RESURFACING SCHEDULE
 - 4.-13. PLAN & PROFILE
 14. TYPICAL ENTRANCE & SIDE ROAD DETAILS
 15. MISCELLANEOUS DETAILS
- STANDARDS
- | | |
|-----------|------------------------------------|
| 701001-01 | TRAFFIC CONTROL |
| 701006-02 | TRAFFIC CONTROL |
| 701011-01 | TRAFFIC CONTROL |
| 701301-02 | TRAFFIC CONTROL |
| 701306-01 | TRAFFIC CONTROL |
| 701311-02 | TRAFFIC CONTROL |
| 702001-06 | TRAFFIC CONTROL DEVICES |
| 720001 | SIGN PANEL MOUNTING DETAILS |
| 720006-01 | SIGN PANEL ERECTION DETAILS |
| 780001-01 | TYPICAL PAVEMENT MARKINGS |
| 781001-02 | RAISED REFLECTIVE PAVEMENT MARKERS |
| BLR 24-1 | MAILBOX TURNOUTS |

CLASSIFICATION : COLLECTOR
ADT : 750
DESIGN SPEED : 50 MPH

ILLINOIS DEPARTMENT OF TRANSPORTATION	
Approved	JANUARY 26, 2007 <i>[Signature]</i> Alexander County, Engineer
Passed	FEB. 6, 2007 <i>[Signature]</i> District 9 Engineer of Local Roads and Streets
Releasing for Bid Based on Limited Review	<i>[Signature]</i> 2-6-07 Deputy Director of Highways, Region 5 Engineer

CONTRACT NO. 99287

E. MILLER ENGINEERING, INC.
CONSULTING ENGINEERS
HARRISBURG, ILLINOIS



[Signature]
Edward W. Miller
PROFESSIONAL ENGINEER
#062-025277
EXPIRES NOV. 30, 2007

LOCATION MAP

SCALE: 1" = 2 MILES

NET LENGTH OF IMPROVEMENT = 23,651.00 FT. = 4.4794 MILES