


LONGITUDINAL SECTION

- ⊓ Existing sprinkler system piping
- Existing fire detection wiring

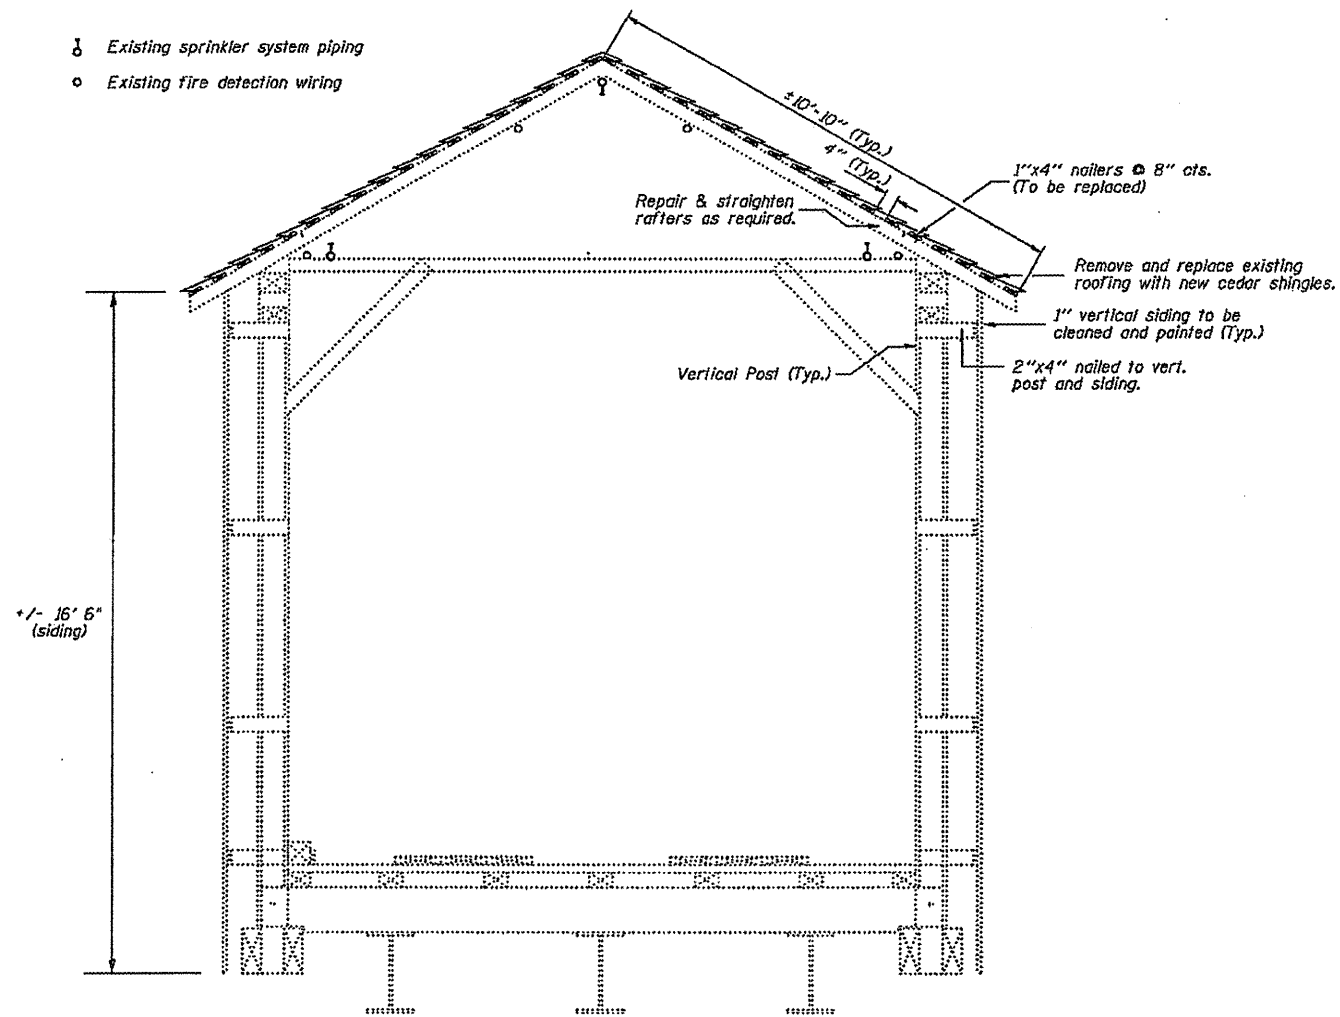

ROOF REPLACEMENT DETAIL

NOTES:

ALL SIDING INCLUDING BRIDGE SIDES, ENDS, AND ROOF FASCIA SHALL BE CLEANED AND PAINTED AS DESCRIBED IN THE SPECIAL PROVISIONS.

DURING WORK OPERATIONS, CARE SHALL BE TAKEN NOT TO DAMAGE THE EXISTING FIRE DETECTION OR SPRINKLER SYSTEMS. ANY DAMAGE SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE.

NO PEDESTRIAN TRAFFIC WILL BE ALLOWED ON THE BRIDGE FOR THE DURATION OF THE PROJECT. THE CONTRACTOR SHALL PROHIBIT PEDESTRIAN ACCESS USING STANDARD BLR 21.

PLAN DIMENSIONS AND DETAILS RELATIVE TO EXISTING PLANS ARE SUBJECT TO NOMINAL CONSTRUCTION VARIATIONS. THE CONTRACTOR SHALL FIELD VERIFY EXISTING DIMENSIONS AND DETAILS AFFECTING NEW CONSTRUCTION AND MAKE NECESSARY APPROVED ADJUSTMENTS PRIOR TO CONSTRUCTION OR ORDERING OF MATERIALS. SUCH VARIATIONS SHALL NOT BE CAUSE FOR ADDITIONAL COMPENSATION FOR A CHANGE IN SCOPE OF WORK. HOWEVER, THE CONTRACTOR WILL BE PAID FOR THE QUANTITY ACTUALLY FURNISHED BASED UPON THE UNIT PRICE BID FOR THE WORK.

REPAIR DETAILS
SN 084-0114
D6 COVERED BRIDGE ROOF 2012
SANGAMON COUNTY