

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FAS 316	12-00229-01-SP	IROQUOIS	12	1
JOB # C-93-048-12			PROJECT HSIP-0316(111)	
CONTRACT 87518				

### INDEX OF SHEETS


SHEET NUMBER	DESCRIPTION
1	COVER SHEET
2	SUMMARY OF QUANTITIES, GENERAL NOTES, & SCHEDULE OF QUANTITIES
3	POST SPACINGS @ BRIDGE DETAIL AND GUARDRAIL REMOVAL DETAIL
4	PLAN VIEW
5	STEEL BRIDGE RAIL DETAILS
6	EXISTING STRUCTURE PLANS
7	EXISTING STRUCTURE PLANS
8, 9, 10 & 11	TRAFFIC BARRIER TERMINAL 6A SPECIAL DETAILS
12	TRAFFIC BARRIER TERMINAL TYPE 1 (SPECIAL) FLARE (SPECIAL) DETAIL

## STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS

# GUARDRAIL PROJECT

## IROQUOIS COUNTY PLANS FOR PROPOSED FEDERAL AID PROJECT

ROUTE: FAS 316, CH 23  
SECTION: 12-00229-01-SP  
PROJECT: HSIP-0316(111)  
JOB No.: C-93-048-12


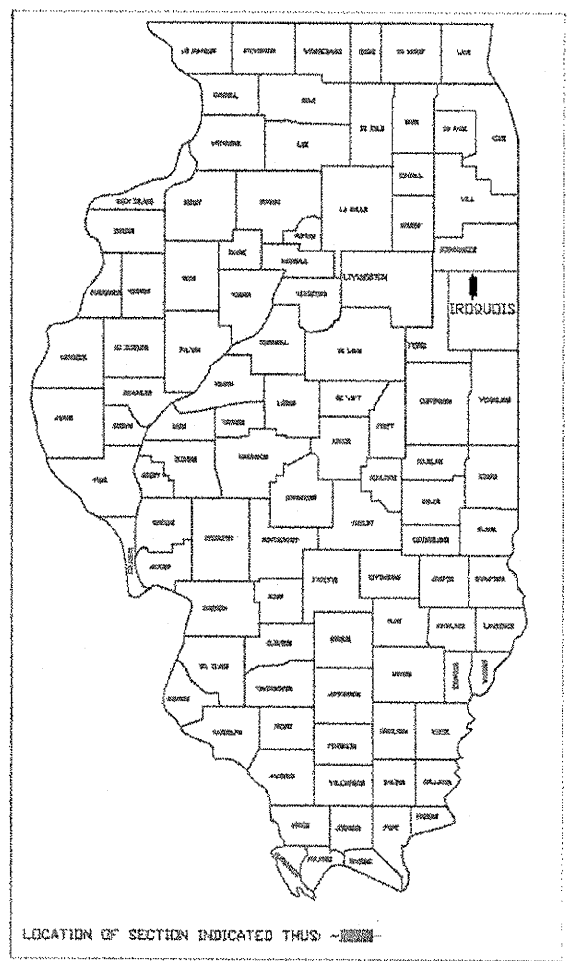


LOCATION OF SECTION INDICATED THUS: [Symbol]

### STANDARDS

- 000001-06 SYMBOLS AND ABBREVIATIONS
- 630301-05 SHOULDER WIDENING FOR TYPE 1 (SPECIAL) GUARDRAIL TERMINALS
- 635001-01 DELINEATORS
- 635006-03 REFLECTOR AND TERMINAL MARKER PLACEMENT
- 635011-02 REFLECTOR MARKER AND MOUNTING DETAILS
- 701901-02 TRAFFIC CONTROL DEVICES
- BLR 21-9 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES FOR CONSTRUCTION ON RURAL LOCAL HIGHWAYS
- BLR 26-3 STEEL PLATE BEAM GUARDRAIL HEIGHT

PROJECT LOCATION  
IMPROVEMENT BEGINS STA. 11+48.61  
IMPROVEMENT ENDS STA. 14+93.96  
STRUCTURE # 038-3203

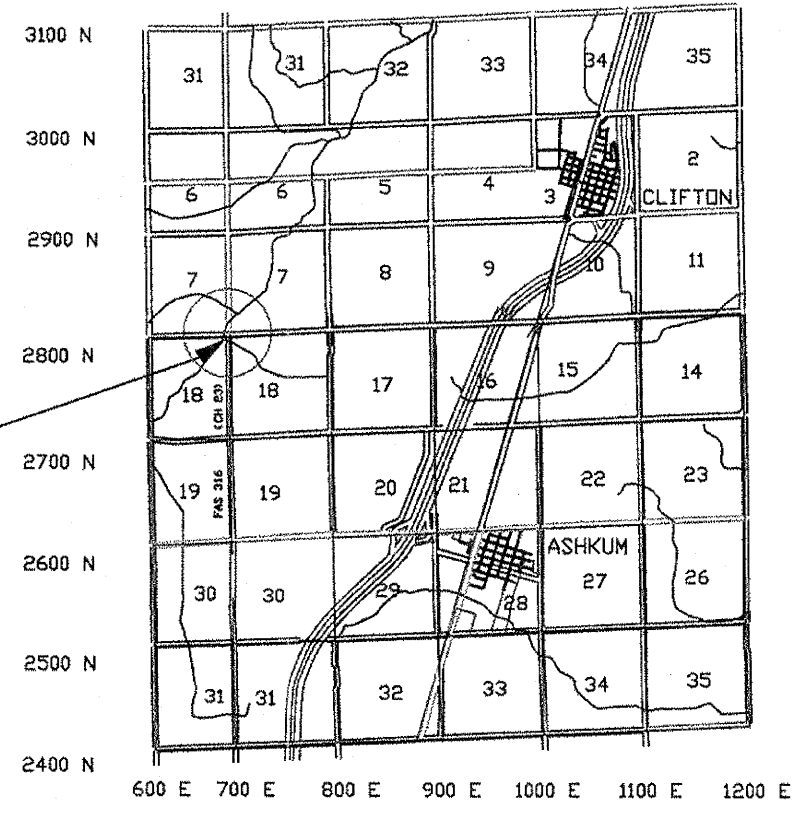


### TRAFFIC DATA

FUNCTIONAL CLASSIFICATION: MINOR COLLECTOR  
ADT = 350  
SPEED LIMIT = 40 M. P. H.

JULIE  
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION  
1-800-892-0123

\* THESE PLAN WERE PREPARED BY ME OR BY A FULL TIME MEMBER OF MY STAFF WORKING UNDER MY DIRECT SUPERVISION \*



*JVM*  
JOEL V. MOORE, COUNTY ENGINEER  
ILL. REG. PROF. ENG. #62056831  
DATE EXPIRES: 11/30/13

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

Approved Feb 14, 2012

*JVM*  
County Engineer

Passed 02-22, 2012

*[Signature]*  
District Three Implementation Engineer

Released for Bid Based On Limited Review 02-22, 2012

*[Signature]*  
Deputy Director of Highways, Region Two Engineer

GROSS LENGTH OF IMPROVEMENT = 345.35 FT. = 0.065 MI.  
NET LENGTH OF IMPROVEMENT = 345.35 FT. = 0.065 MI.

CONTRACT NO. 87518