


PROPOSED TYPICAL CROSS SECTION

Sta. 8+75.50 to Sta. 90+00

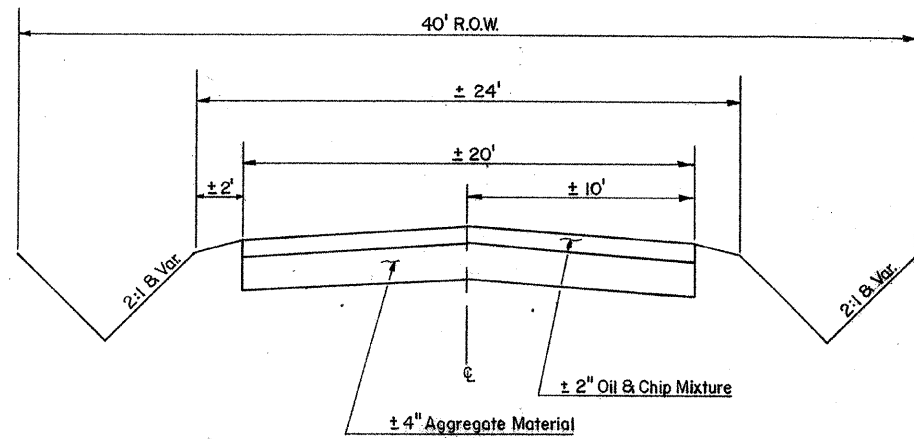

EXISTING TYPICAL CROSS SECTION

Sta. 8+75.50 to Sta. 90+00

EARTH WORK SCHEDULE					
STA TO STA	LOCATION	EARTH EXCAVATION	EARTH EXCAVATION (ADJUSTED FOR SHRINKAGE)	EMBANKMENT	EARTH WORK BALANCE (+) OR SHORTAGE (-)
STA 8+75.5 TO STA 90+00	MAINLINE	14311	10733	10544	+189
STA 0+30 TO STA 4+00	SIDE ROAD SOUTH	307	230	8	+222
STA 59+50 TO STA 61+47	BERM ALONG MAINLINE	0	0	33	-33
STA 67+00 TO STA 70+00	BERM ALONG MAINLINE	0	0	46	-46
15+36 LT	ENT.	0	0	20	-20
29+00 LT	ENT.	0	0	31	-31
29+00 RT	ENT.	0	0	26	-26
34+70 RT	ENT.	0	0	34	-34
47+88 RT	ENT.	0	0	77	-77
48+25 LT	ENT.	0	0	58	-58
48+78 LT	ENT.	0	0	47	-47
53+05 RT	ENT.	0	0	38	-38
54+90 LT	ENT.	0	0	48	-48
55+45 LT	ENT.	0	0	47	-47
56+76 LT	ENT.	0	0	60	-60
58+48 LT	ENT.	0	0	82	-82
77+65 LT	ENT.	0	0	107	-107
79+50 LT	ENT.	0	0	142	-142
86+92 LT	ENT.	0	0	58	-58
88+50 LT	ENT.	0	0	18	-18
TOTALS		14618	10963	11524	-561

TREE REMOVAL ACRES SCHEDULE

STA	O/S	QUANTITY
74+97 TO 76+00	LEFT	0.1
76+00 TO 76+35	LEFT	0.1
TOTAL		0.2 ACRES

TREE REMOVAL (OVER 15 UNITS DIA) SCHEDULE

STA	O/S	SIZE
77+04	28 FT LT	36
TOTAL		36 UNIT

TYPICAL SECTIONS

SCALE:	APPROVED BY:	DRAWN BY:
DATE:	REVISION:	
		DRAWING NUMBER: