

DESIGNER: CLARK JONES
PHONE: (309)671-3452

PROJECT ENGINEER: JIM MILLER
PHONE: (309)671-3451

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR		PEO/TAZ	27	1

* D4 Joint Repair 2006

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

**PROPOSED
HIGHWAY PLANS**


FAP 317/FAI 155 (US 24)/(I-155)
SECTION D4 JOINT REPAIR 2006
PEORIA / TAZEWELL COUNTY
C-94-023-05

INDEX OF SHEETS:

- 1. COVER SHEET
- 2. GENERAL NOTES
- 3. SUMMARY OF QUANTITIES
- 4. SCHEDULE OF QUANTITIES
- 5 ~ 9. PLAN SHEETS & DETAILS(072-0012/0133)
- 10 ~ 17. PLAN SHEETS & DETAILS(090-0130)
- 18 ~ 22. PLAN SHEETS & DETAILS(090-0095)
- 23 ~ 27. PLAN SHEETS & DETAILS(090-0093)


STANDARDS:

- 701101-01 701601-04
- 701201-02 702001-06
- 701406-04 701400-02

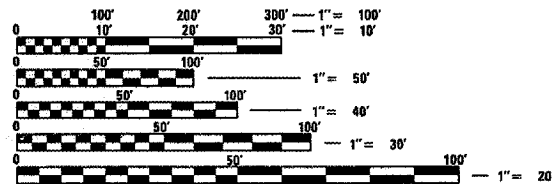

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123

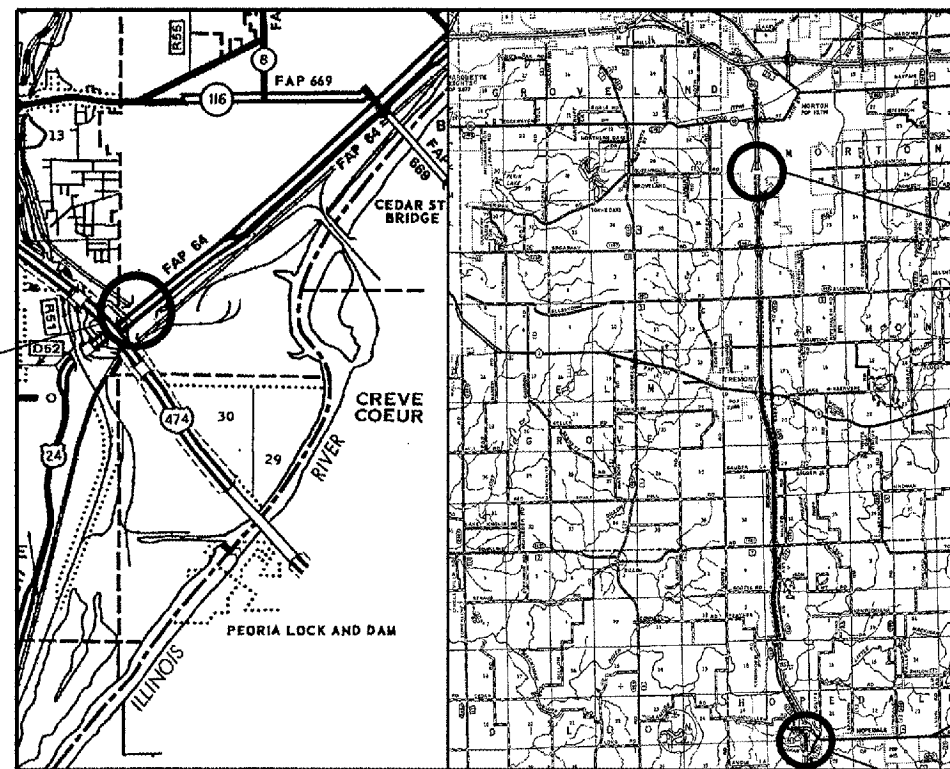


SN.072-0012
AND
SN.072-0133

SN.090-0130

SN.090-0095
&
SN.090-0093

PROJECT CONSISTS OF JOINT REMOVAL/REPLACEMENT OF EXPANSION JOINT SEALS WITH POURABLE SEALANTS ON 5 STRUCTURES: (SN 072-0012 AND 072-0133), CARRYING US 24 OVER BU&CNW RR, (SN 090-0130), QUEENWOOD RD. OVER I-155, (SN 090-0095), IL.122E OVER I-155 TWO MILES WEST OF HOPEDALE, AND (SN 090-0093), I-155 SB OVER INDIAN CRK. STRUCTURE 090-0093 ALSO INCLUDES METALING PPC BEAM ENDS.

D-94-021-05

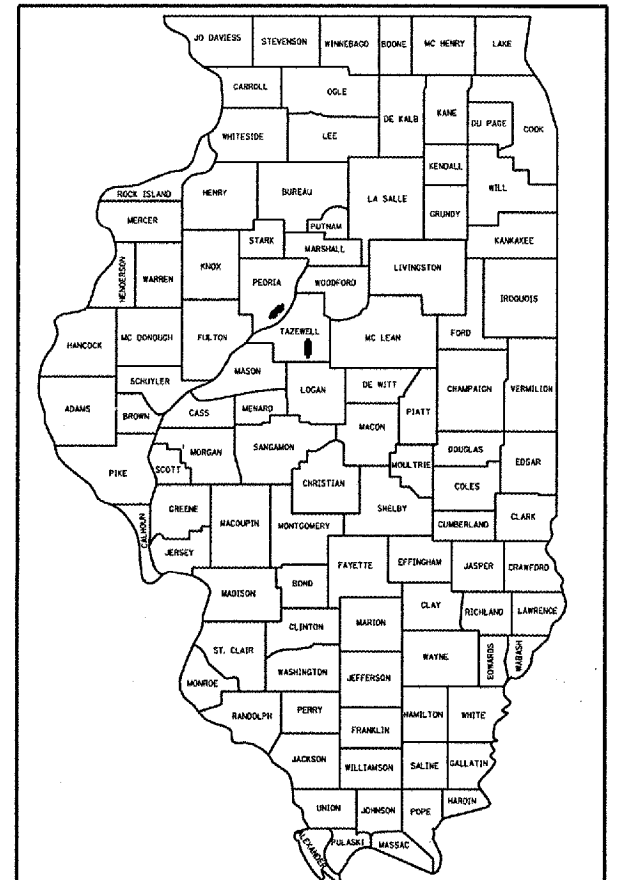

LOCATION OF SECTION INDICATED THUS: -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

SUBMITTED October 20, 2005

John [Signature]
DEPUTY DIRECTOR OF HIGHWAYS, REGION ENGINEER

December 9, 2005
Mike [Signature]
ENGINEER OF DESIGN AND ENVIRONMENT

December 9, 2005
Eric [Signature]
DEPUTY DIRECTOR OF HIGHWAYS, CHIEF ENGINEER

**PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS**