

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	D2 REFLECTOR REPL 23-21	VARIOUS	3	1
		ILLINOIS	CONTRACT NO. 46613	

INDEX OF SHEETS:


COVER SHEET, SHEET No. 1

GENERAL NOTES, SHEET No. 2
STATE STANDARDS, SHEET No. 2



SUMMARY OF QUANTITIES, SHEET No. 3

PROPOSED HIGHWAY PLANS

VARIOUS ROUTES
SECTION D2 REFLECTOR REPL 23-21
VARIOUS COUNTIES

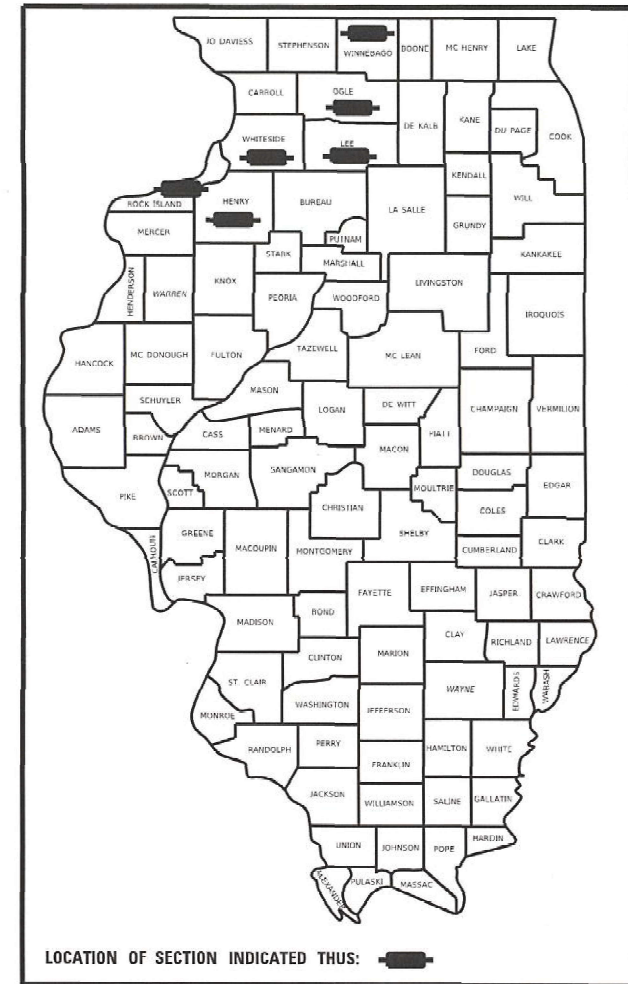

M-60-021-23

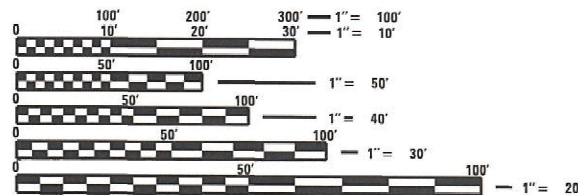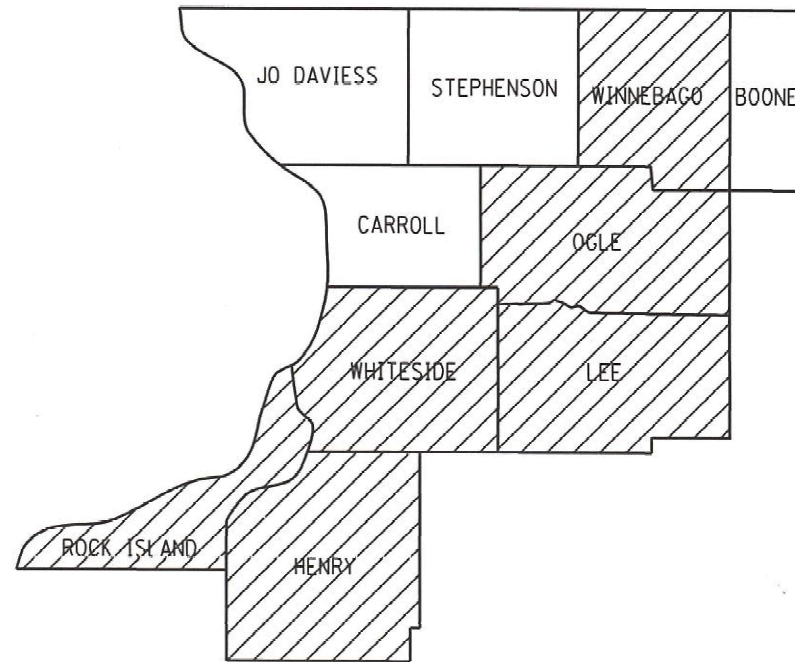

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER: TROY EBENEZER (815) 284-5491
PROJECT MANAGER: KRISTIE NYDEREK (815) 284-5469

CONTRACT NO. 46613

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED January 13th 2023

REGIONAL ENGINEER

March 24, 2023

ENGINEER OF DESIGN AND ENVIRONMENT

March 24, 2023

DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

**PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS**

GENERAL NOTES

The Department may remove and not install markers in certain locations at the engineer's discretion.

The Department may install markers in certain locations that did not previously have markers at the engineer's discretion.

The locations of the repair areas shall be determined by the engineer.

The work site shall be left in a safe and orderly condition, filling any holes created by the end of the work day.

No material should be left on or near the roadway.
Removal of damaged materials will include loading, hauling, and disposal.

Any necessary traffic control will be provided by the contractor; appropriate standards are listed on Sheet No. 2.
Traffic control shall not be paid for as separate pay items, but shall be considered a part of the contract.

The quantities specified in this contract are only an estimate to allow Contractors to establish unit prices and permit the Department to determine the low bidder. It shall be understood that the unit prices of this contract shall prevail throughout the contract regardless of the quantity.

STATE STANDARDS

701006-05	OFF-RD OPERATIONS, 2L2W, 15' to 24" FROM PAVEMENT EDGE
701101-05	OFF-RD OPERATIONS, MULTI-LANE, 15' to 24" FROM PAVEMENT EDGE
701301-04	LANE CLOSURE, 2L2W, SHORT TIME OPERATIONS
701306-04	LANE CLOSURE, 2L2W, SLOW MOVING OPERATION, DAY ONLY, FOR SPEEDS ≥ 45 MPH
701311-03	LANE CLOSURE, 2L2W, MOVING OPERATION, DAY ONLY
701411-09	LANE CLOSURE, MULTI-LANE, AT ENTRANCE OR EXIT RAMP, FOR SPEEDS ≥ 45 MPH
701426-09	LANE CLOSURE, MULTI-LANE, INTERMITTANT/MOVING OPER, FOR SPEEDS ≥ 45 MPH
701427-05	LANE CLOSURE, MULTI-LANE, INTERMITTANT/MOVING OPER, FOR SPEEDS < 40 MPH
701501-06	URBAN LANE CLOSURE, 2L2W, UNDIVIDED
701502-09	URBAN LANE CLOSURE, 2L2W, BIDIRECTIONAL LEFT TURN LANE
701901-08	TRAFFIC CONTROL DEVICES
781001-04	TYPICAL APPLICATIONS RAISED REFLECTIVE PAVEMENT MARKERS

MODEL: D:\den\... FILE NAME: SATR.Contract\Revised Pavement markers.Contract 46613 for 2023\Drawings\Submittals\46613.plt.dwg

USER NAME = Sherry Ditzler PLOT SCALE = 1/8" = 102.9963' / in. PLOT DATE = Jan-11-2023 10:22:05 PM	DESIGNED - _____ DRAWN - _____ CHECKED - _____ DATE - _____	REVISED - _____ REVISED - _____ REVISED - _____ REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	GENERAL NOTES & STATE STANDARDS	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="font-size: 6px;">F.A. RTE.</th> <th style="font-size: 6px;">SECTION</th> <th style="font-size: 6px;">COUNTY</th> <th style="font-size: 6px;">TOTAL SHEETS</th> <th style="font-size: 6px;">SHEET NO.</th> </tr> <tr> <td style="font-size: 6px;">VAR.</td> <td style="font-size: 6px;">D2 REFLECTOR REPL 23-21</td> <td style="font-size: 6px;">VARIOUS</td> <td style="font-size: 6px;"></td> <td style="font-size: 6px;">2</td> </tr> <tr> <td colspan="5" style="font-size: 6px; text-align: center;">CONTRACT NO. 46613</td> </tr> </table>	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	VAR.	D2 REFLECTOR REPL 23-21	VARIOUS		2	CONTRACT NO. 46613				
F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.																
VAR.	D2 REFLECTOR REPL 23-21	VARIOUS		2																
CONTRACT NO. 46613																				
SCALE: _____ SHEET _____ OF _____ SHEETS STA. _____ TO STA. _____				ILLINOIS FED. AID PROJECT																

SUMMARY OF QUANTITIES

TOTALS	Estimated Milage	78100100 Replace Reflector Casting	78100300 Replace Reflector only	78100200 Remove Reflector Casting
I-90/I-39 Winnebago Co.	2.4	475	905	250
I-39 Winnebago Co.	21.5	1800	5695	750
Rock Island Co. = All Routes Minus Interstates		4260	9945	3150
Henry Co. = All Routes Minus Interstates		2310	5390	1650

PAYCODE	ITEM DESCRIPTION	Unit	0021 Total Quantity	100% State Rural
78100100	Raised Reflector Pavement Marker	Each	8845	8845
78100300	Replacement Reflector	Each	21935	21935
78300200	Raised Reflective Pavement Marker Removal	Each	5800	5800

MODEL Output
FILE NAME: S:\TR_Contract\Based Pavement markers\Contract_46613_for_2023\Drawings\Summary\46613_plans.dwg

USER NAME = Sherry Ditzler	DESIGNED - _____	REVISED - _____
PLOT SCALE = 102.9963' / in.	DRAWN - _____	REVISED - _____
PLOT DATE = Jan-13-2023 01:46:25 AM	CHECKED - _____	REVISED - _____
	DATE - _____	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SUMMARY OF QUANTITIES

SCALE: _____ SHEET _____ OF _____ SHEETS STA. _____ TO STA. _____

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	D2 REFLECTOR REPL 23-21	VARIOUS	3	3
CONTRACT NO. 46613				
ILLINOIS FED. AID PROJECT				