

Summary of Quantities								
#	Item	Section	Quantity				Unit	Rates/Remarks
			South	North	West	Total		
1	Special Clearing	201	-	-	-	1	L.S.	
2	Earth Excavation	202	84037	29105	0	113142	C.Y.	COMPACTION REQUIRED AS PER SPECIAL PROVISION 205
3	Seeding	250	14.4	5.0	0.2	19.6	Acre	
4	Agricultural Ground Limestone	250	144	50	2	196	Ton	10 T/AC
5	Nitrogen Fertilizer Nutrient	250	2880	1000	40	3920	Pound	100 LB/AC FOR TWO APPLICATIONS
6	Phosphorus Fertilizer Nutrient	250	2160	750	30	2940	Pound	150 LB/AC
7	Potassium Fertilizer Nutrient	250	5040	1750	70	6860	Pound	350 LB/AC
8	Mulch, Method 2, Procedure 2	IDOT 251	14.4	5.0	0.2	19.6	Acre	2 T/AC
9	Mine Spoil Treatment - CKD	255	1.24	0.07	0.12	1.43	Acre	4" CKD & 4" MINE SPOIL PER LIFT FOR THREE LIFTS
10	Mowing	258	14.4	5.0	0.2	19.6	Acre	
11	Stone Riprap A-3	IDOT 281	1368	655	0	2023	S.Y.	
12	Stone Riprap A-4	IDOT 281	42	0	0	42	S.Y.	CLASS A, GRADATION RR4
13	Filter Fabric	IDOT 282	1410	655	0	2065	S.Y.	
14	Special Excelsior Blanket	286	8452	3010	364	11826	S.Y.	8' WIDTH
15	Pipe Culvert, 24" CPE, Type 2	IDOT 542	30	0	0	30	Foot	
16	Pipe Culvert, 30" CPE, Type 2	IDOT 542	0	0	60	60	Foot	
17	Mobilization	671	1	0	0	1	L.S.	MAXIMUM 6% OF TOTAL BID

GENERAL NOTES

Unless otherwise noted on the plans, all disturbed areas within the construction limits will be amended with agricultural ground limestone, fertilizer nutrients, seeded and mulched at the required rates specified in the plans.

The contractor is responsible for visiting the site and familiarizing himself with the existing conditions and the proposed reclamation work prior to submitting a bid.

The contractor shall provide and pay for all field engineering services to execute the project as specified in the Field Engineering section of the Special Provisions.

The contractor is responsible for locating and protecting all existing utility lines pertaining to the work.

Unless noted on the plans, all onsite access roads may be used for construction and must be maintained during construction and restored to original or better condition at the completion of work by the contractor. Access roads to the site as designated in the plans are to be maintained to the satisfaction of the engineer.

The construction limits will be staked by the contractor prior to construction. The contractor is responsible for the repair and or restitution at his own expense for all damages done to any area outside the construction limits.

Application rates specified in the plans are shown in the Summary of Quantities-Rates/Remarks column.

CONSTRUCTION NOTES

BURIAL/REMOVAL OF MATERIAL-Concrete and masonry debris designated for burial by the engineer shall be buried at least three feet below proposed final grade. Onsite organic debris and trash shall be disposed of in an engineer approved offsite landfill in accordance with Sections 201 and 501 of the Special Provisions.



TREE REMOVAL-Trees removed shall be disposed of onsite per Section 201 of the Special Provisions.

ACID WATER TREATMENT-If acid mine drainage treatment is determined necessary by the engineer, and not otherwise specified in the plans, any water treatment will be paid for in accordance with Article 109.04 of the Standard Specifications.

EROSION CONTROL-The contractor shall schedule his operations and take such precautions that may be necessary to prevent or minimize erosion. Failure to comply with this requirement shall cause the contractor to be fully responsible for repairing any eroded areas and cleaning up areas or drainage structures that have become silted in or damaged.

AGRICULTURAL GROUND LIMESTONE-Immediately prior to seed bed preparation, fertilizer nutrients and agricultural ground limestone shall be uniformly spread at the rates specified in the plans.

MULCHING-Within 24 hours from the time seeding has been performed, the seeded area shall be given a covering of mulch at the rates specified in the plans. The mulch is to be anchored into the soil in accordance with the requirements for method 2, procedure 2 of Article 251.03 of the Standard Specifications. If Excelsior or Special Excelsior Blanket is to be used, the blanket shall be placed the same day that the areas are seeded.

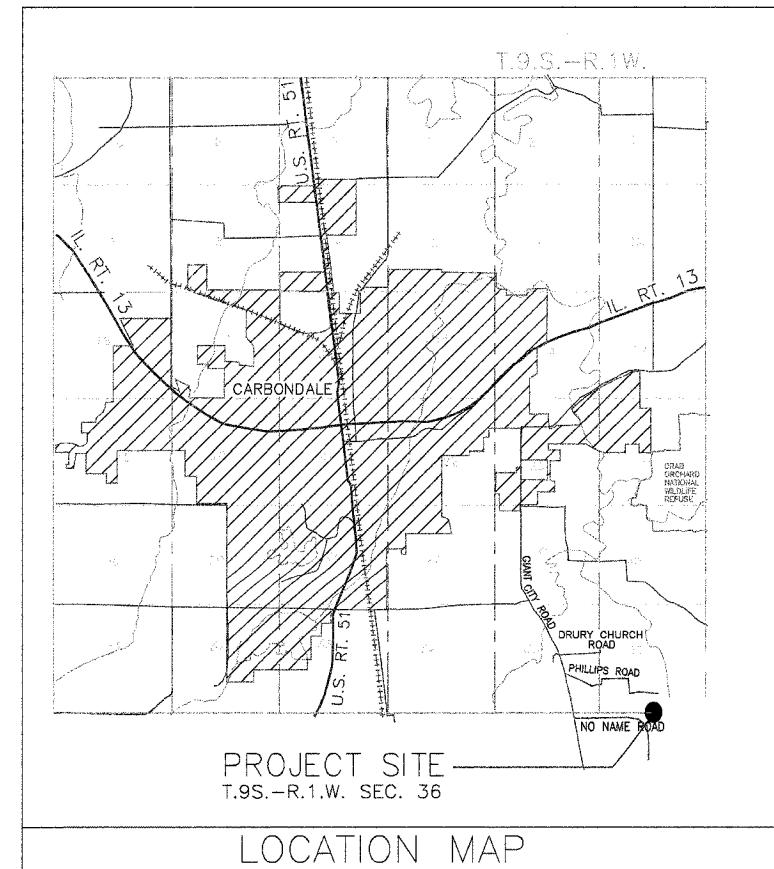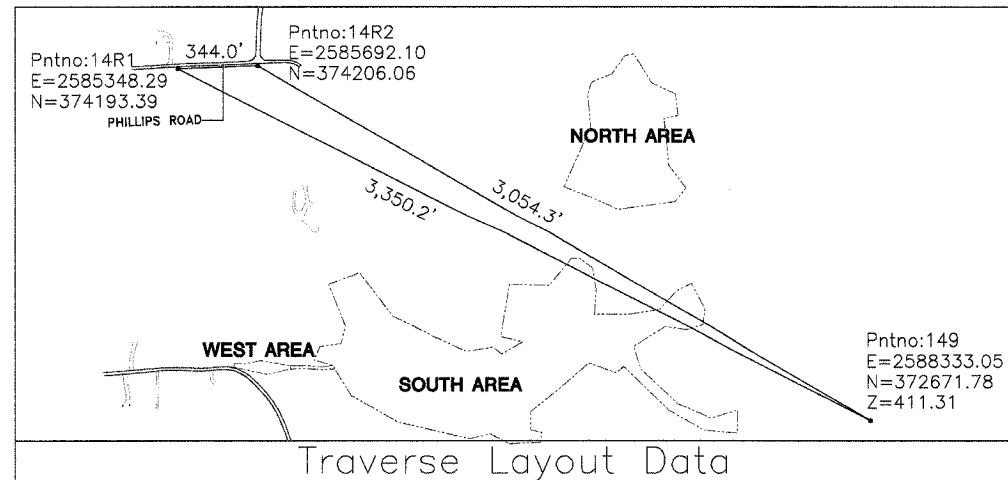

Schedule of Seeding, Fertilizer Nutrients, Mulch and Mowing			
ITEM (unit)	INITIAL APPLICATION FALL 2005 AUG. 20-SEPT. 30	INITIAL APPLICATION SPRING 2006 JAN 1-MARCH 15	TOTAL QUANTITY
SEEDING (acres)	19.6	-	19.6
AGRICULTURAL GROUND LIMESTONE (tons)	196	-	196
NITROGEN FERTILIZER NUTRIENT (pounds)	1960	1960	3920
PHOSPHOROUS FERTILIZER NUTRIENT (pounds)	2940	-	2940
POTASSIUM FERTILIZER NUTRIENT (pounds)	6860	-	6860
MULCH, METHOD 2 PROCEDURE 2 (acres)	19.6	-	19.6
MOWING (acres)	-	19.6	19.6

State of Illinois
Department of Natural Resources

Tab Simco Phase II
Reclamation Project
AML-GJkE-0414
Jackson County

Date: _____

Drawn By: _____

Checked By: _____

Summary of Quantities/
General Notes/Location Map/
Traverse Layout Data