


PAVEMENT SCHEDULE

LOCATION	HMA SURFACE REMOVAL, 1 1/2"	PCC SURFACE REMOVAL - BUTT JOINT	BITUMINOUS MATERIALS (PRIME COAT)	LEVELING BINDER	HMA SURFACE COURSE	AGGREGATE WEDGE SHOULDERS, TYPE B	HMA SHOULDER CURB
SN 082-0218	SQ YD	SQ YD	GAL	TONS	TON	TON	FOOT
STA 36+48.60 TO STA 37+98.60	500	100	38	89	42	15	100
SUBTOTALS							
TOTALS							
	500	100	38	89	42	15	100


PAVEMENT MARKING SCHEDULE

LOCATION	PAVEMENT MARKING REMOVAL	POLYUREA PAVEMENT MARKING TYPE 1 - LINE 4"			THERMOPLASTIC PAVEMENT MARKING - LINE 4"		RAISED REFLECTIVE PAVEMENT MARKER REMOVAL EACH	RAISED REFLECTIVE PAVEMENT MARKER (BRIDGE) EACH
		SOLID		SKIP-DASH	SOLID			
		WHITE	YELLOW	WHITE	WHITE	YELLOW		
SN 082-0217	SQ FT	FT	FT	FT	FT	FT	EACH	EACH
STA 43+25.53 TO STA 53+41.74	762.2	1016.2	1016.2	254.2			3	3
SN 082-0218								
STA 126+87.47 TO STA 131+73.25	323.9	485.8	485.8					
STA 31+73.25 TO STA 36+48.60	316.9	475.4	475.4					
STA 36+48.60 TO STA 37+98.60	100.0				150	150		
SUBTOTALS			1977.4	1977.4	254.2	150	150	
TOTALS		1503	4209		300	3	3	

STATION EQUATION: STA.131+73.25 BK = STA 31+73.25 AHEAD

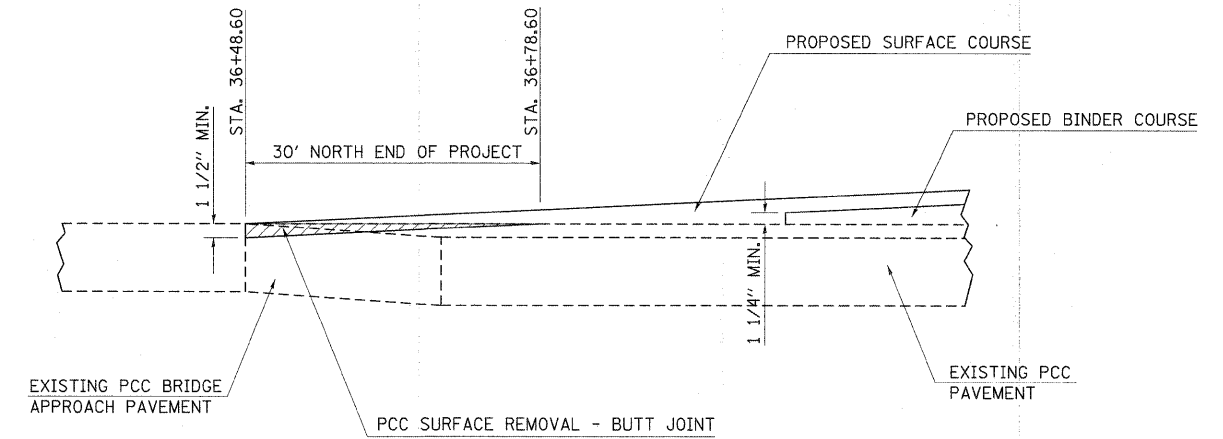

BUTT JOINT DETAIL

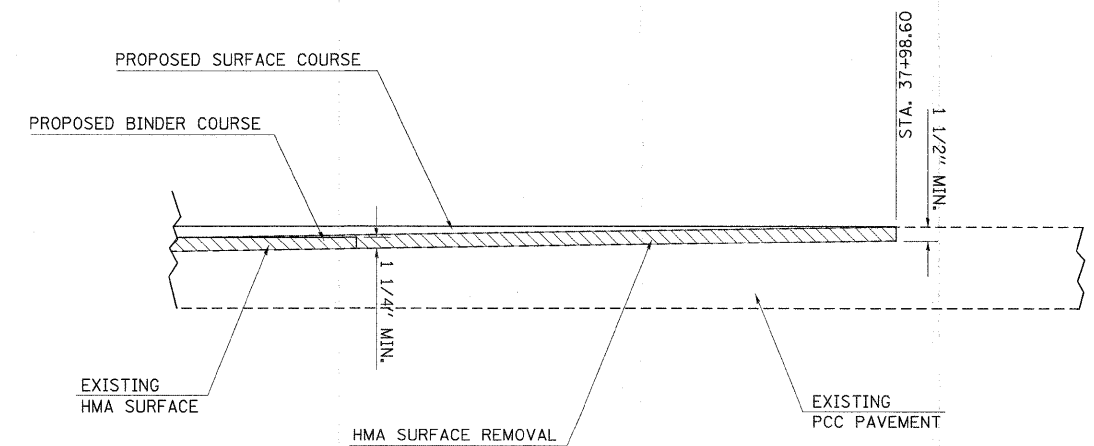

HMA SURFACE REMOVAL DETAIL