
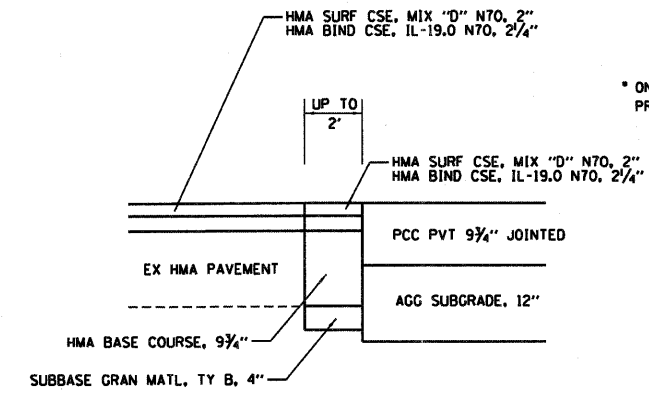


RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
344	(46-1S&47)WRS-2	LAKE	234	93
STA.		TO STA.		
FED. ROAD DIST. NO. 7		ILLINOIS	FED. AID PROJECT	
CONTRACT NO. 60956				

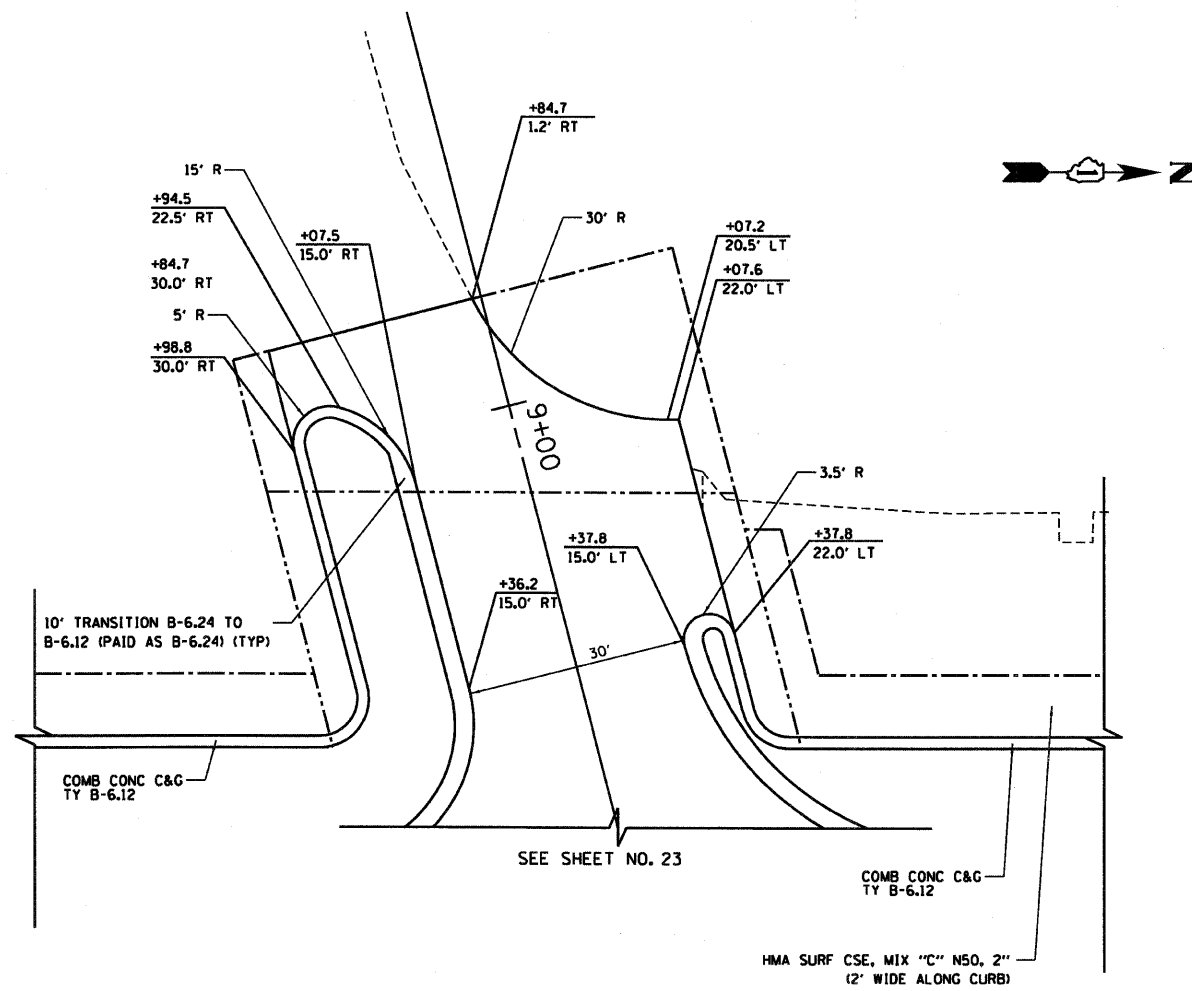

* ON BRAE LOCH ROAD AND GAGES LAKE ROAD, CONNECT PR PCC PAVEMENT TO EX HMA PAVEMENT ONLY

METHOD OF CONSTRUCTION SHALL BE AS FOLLOWS:

- 1) SAW CUT AND REMOVE EXISTING PAVEMENT UP TO 2' BEYOND PCC PAVEMENT LIMITS
- 2) CONSTRUCT PCC PAVEMENT TO LIMITS SHOWN ON THE PLANS.
- 3) AFTER PCC PAVEMENT HAS CURED, CONSTRUCT SUBBASE GRAN MATL AND HMA BASE COURSE AS SHOWN ON THE DETAIL.
- 4) PLACE OVERLAY OF BINDER AND SURFACE COURSES.

WORK SHALL BE PAID AS:

- PAVEMENT REMOVAL
- HMA BASE COURSE, 9 3/4"
- HMA BINDER COURSE, IL-19.0, N70
- HMA SURFACE COURSE, MIX "D", N70
- SUBBASE GRANULAR MATERIAL, TYPE B, 4"

DETAIL FOR CONSTRUCTING PCC PAVEMENT AGAINST EXISTING HMA PAVEMENT

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

CONSTRUCTION DETAILS

U. S. ROUTE 45

DATE: 12/14/09
 DRAWN BY: SAH
 CHECKED BY: BJL

NO SCALE