
STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

EXISTING DECK BEAM

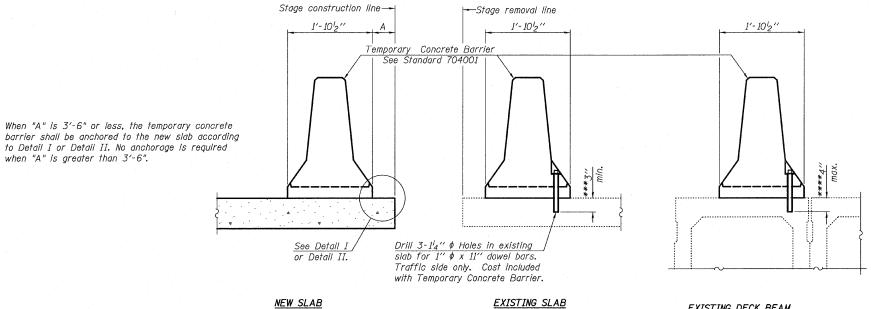

NOTES


Detail I - With Bar Splicer or Couplers: Connect one (1) 1"x7"x10" steel P to the top layer of couplers with 2-58" \$\phi\$ bolts screwed to coupler at approximate & of each barrier panel.

Detail II - With Extended Reinforcement Bars: Connect one (1) 1"x7"x 10" steel ₱ to the concrete slab or concrete wearing surface with 2-58" \$\phi\$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate € of each barrier panel.


Cost of anchorage is included with Temporary Concrete Barrier.
The 1" x 7" x 10" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.

SECTIONS THRU SLAB OR DECK BEAM


- *** Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.
- **** If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

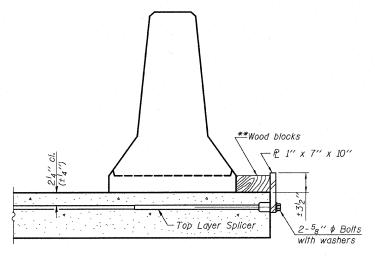

DETAIL I

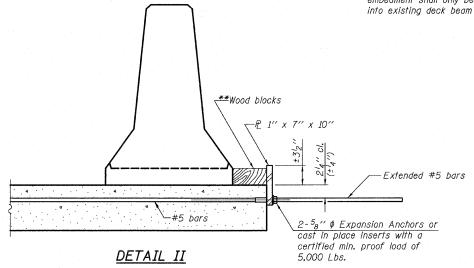

**Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.



STEEL RETAINER P 1" x 7" x 10"

* Required only with Detail II

TEMPORARY CONCRETE BARRIER FOR STAGE CONSTRUCTION STRUCTURE NO. 026-0105

						the second second		
	SHEET NO. 5	F.A.P. RTE.	SECTION			COUNTY	TOTAL SHEETS	SHEET NO.
		752	(U-2BR1)B-1			FAYETTE	71	27
	38 SHEETS					CONTRACT	NO. 74	235
		FED. RO	DAD DIST. NO. 7	ILLINOIS	FED. A	ID PROJECT		



Eastport Business Center 1 100 Lanter Court, Suite 1 Collinsville, Illinois 62234 618-345-2200 Design Firm License No. 184.001115

DESIGNED -CHECKED -DRAWN HECKED -