

PLOWED CABLE (NOT TO SCALE)

UNIT DUCT


1/2" STROKE LETTERS IMPRESSED 1/4" INTO CONCRETE THE SPLICE DUCT CABLE NUMBER AND— SIZE OF DUCTS INSTALLED 24" TYP. ARROW TO INDICATE BENEATH DIRECTION OF CABLE RUN MARKER **NEW OR REPLACEMENT** IN-TURF CONCRETE CABLE AND DUCT MARKERS (NOT TO SCALE) CONCRETE SECTION VIEW NOTES:

- NEW MARKERS ARE REQUIRED ON ALL FAA CABLES. CABLE MARKERS SHALL BE INSTALLED BY THE CONTRACTOR AT ALL LOCATIONS SELECTED BY THE RESIDENT ENGINEER AND / OR THE FAA. THE CONTRACTOR SHALL BE REQUIRED TO ADJUST THE ELEVATION OF EXISTING MARKERS AND / OR REPLACE EXISTING MARKERS DAMAGED DURING CONSTRUCTION.

 2. COST OF CONCRETE MARKERS IS INCIDENTAL TO THE ASSOCIATED ITEMS OF DUCT
- 3. EDGE EXPOSED CONCRETE WITH A 1/4" RADIUS TOOL.
- WHERE ADDITIONAL SPACE TO FIT THE LEGEND IS REQUIRED, SOME OF THE FOLLOWING METHODS SHALL BE EMPLOYED.

 A. REDUCE LETTER SIZE TO 3" HIGH, 2" WIDE.


 - INCREASE THE MARKER SIZE TO 30" X 30" MAX. C. PROVIDE ADDITIONAL MARKERS PLACED SIDE BY SIDE.

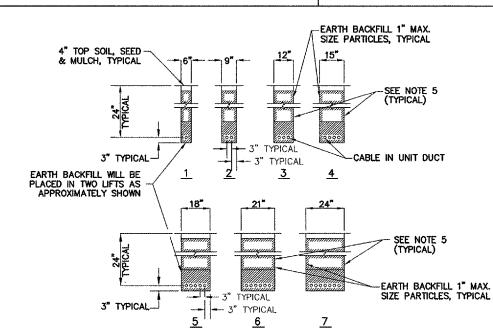

CABLE TRENCH NOTES:

- 1. DETAIL NUMBERS INDICATE NO. OF CABLES.
- 2. TRENCHES WITH MORE THAN 7 CABLES SHALL BE INCREASED 3" IN WIDTH FOR EACH ADDITIONAL CABLE; IF SPECIFIED ON PLANS, TWO PARALLEL TRENCHES MAY BE CONSTRUCTED.
- DEPTH OF TRENCHES SHALL BE AS SHOWN ABOVE UNLESS OTHERWISE SPECIFIED ON THE PLANS.
- 4. ALL DISTURBED SURFACES SHALL BE RESTORED TO THEIR ORIGINAL CONDITION. COST IS INCIDENTAL TO TRENCH. RETURFING MATERIALS AND RATES MAY BE SHOWN ON THE PLANS.
- INSTALL YELLOW PLASTIC WARNING RIBBON IN TRENCH 9" ABOVE CABLES (TYPICAL ALL TRENCHES).

CABLE TRENCHES (NOT TO SCALE)

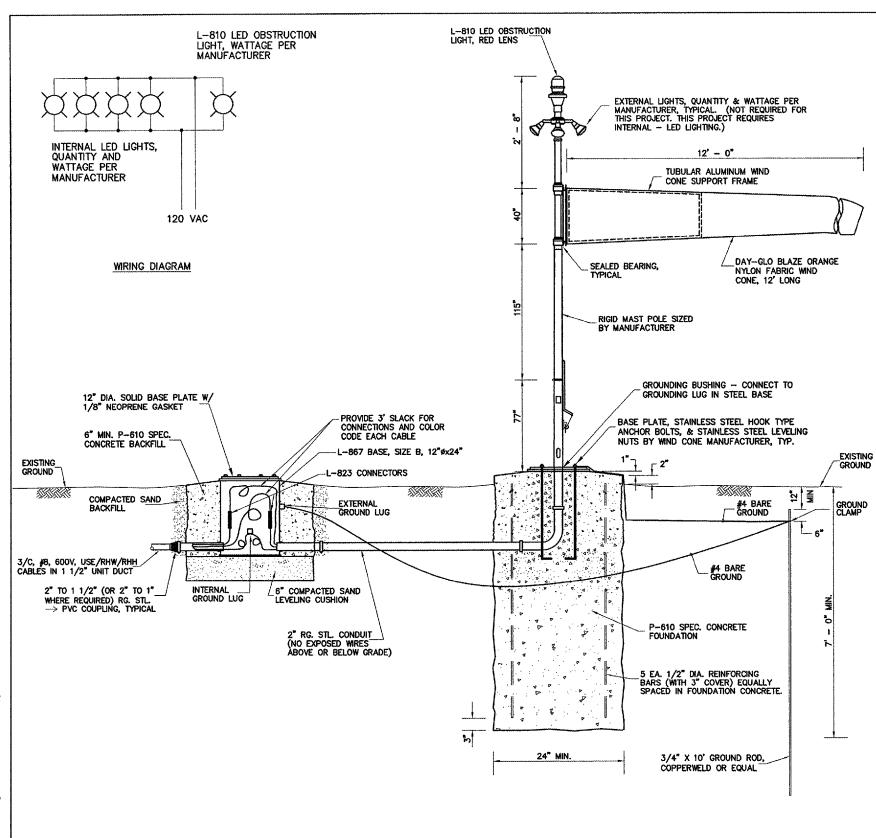

PROFILE VIEW

L-807 LIGHTED (INTERNAL LED) 36" WIND CONE ASSEMBLY DETAILS NON-FRANGIBLE - BASE MOUNTED

> 120 VAC POWER SOURCE NOT TO SCALE