

78001110 - PAINT PAVEMENT MARKING - LINE 4"
 70300220 - TEMPORARY PAVEMENT MARKING - LINE 4"

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FAS 321	17-00315-00-RS	IRROQUOIS	6	7
JOB #: C-93-013-21			PROJECT #: KGOA(9772)	
CONTRACT 87747				

PAVEMENT SCHEDULE

TYPE	STATION TO STATION	FEET	LINE 4"
	CENTERLINE (YELLOW)		
SKIP DASH	277+00 TO 315+44	3,844'	961'
SKIP DASH	368+44 TO 460+30	9,186'	2,297'
SKIP DASH	460+52 TO 563+30	10,278'	2,570'
	SUB-TOTAL =		5,828'
	NO PASSING ZONE (YELLOW)		
SINGLE NO PASS & SKIP DASH	315+44 TO 327+47 RT	1,203'	1,504'
DOUBLE NO PASS	327+47 TO 332+90 RT & LT	543'	1,086'
SINGLE NO PASS & SKIP DASH	332+90 TO 340+05 LT	715'	894'
DOUBLE NO PASS	340+05 TO 344+70 RT & LT	465'	930'
SINGLE NO PASS & SKIP DASH	344+70 TO 352+00 RT	730'	913'
DOUBLE NO PASS	352+00 TO 356+61 RT & LT	461'	922'
SINGLE NO PASS & SKIP DASH	356+61 TO 368+44 LT	1,183'	1,479'
	SUB-TOTAL =		7,728'

PAY ITEM	40603080	40604050	48101200	40600290	Z0033700	Z0034105
UNIT	(TON)	(TON)	(TON)	(PDLND)	(FOOT)	(TON)
STATION TO STATION	HMA BINDER COURSE IL-19.0, NS0	HMA SURFACE COURSE IL-9.5 MIX "C" NS0	AGGREGATE SHOULDERS TYPE B	BITUMINOUS MATERIALS (TACK COAT)	LONGITUDINAL JOINT SEALANT	MATERIAL TRANSFER DEVICE
277+00 TO 460+30	6,511	3,764	4,583	31,271	18,330	10,275
460+52 TO 563+30	3,489	2,336	2,717	16,229	10,278	5,825
TOTAL =	10,000	6,100	7,300	47,500	28,608	16,100

TOTAL FOR TEMPORARY PAVEMENT MARKING = 13,556'
 TOTAL ALL STRIPING FOR PAINT PAVEMENT MARKING LINE 4" (TWO APPLICATIONS) = 27,112'

44201745-CLASS D PATCHES, TY III, 8 INCH SCHEDULE - CLASS D PATCHING 8"

STATION	WESTBOUND LANE	EASTBOUND LANE	PATCH LOCATION
	PATCH TYPE III SQ YD	PATCH TYPE III SQ YD	
469+92 TO 470+08 LT		20	HMA PAVEMENT
469+92 TO 470+08 RT	20		HMA PAVEMENT
480+69 TO 480+85 LT		20	HMA PAVEMENT
480+69 TO 480+85 RT	20		HMA PAVEMENT
TOTALS	40	40	
TYPE III TOTALS	= 80 SQ YD		

54390210 INSERTION CULVERT LINER 30"

STATION TO STATION	FOOT
513+33	54
526+54	52
TOTAL =	106

40600982 HMA SURFACE REMOVAL BUTT JOINT

STATION TO STATION	SQ. YDS.
277+00 TO 277+50	122
329+69 LT	31
353+75 RT	31
459+80 TO 460+30	191
460+52 TO 460+82	241
562+80 TO 563+30	122
TOTAL =	738

40600990 TEMPORARY RAMP


STATION	SQ. YDS.
277+00	12
329+69 LT	11
353+75 RT	11
460+30	53
460+52	56
563+30	12
TOTAL =	155

66700205 PERMANENT SURVEY MARKERS TYPE 1

STATION	EACH
277+98	1
304+44	1
379+89	1
406+93	1
433+69	1
TOTAL =	5

Z0055300 RUMBLE STRIPS

STATION	EACH
449+60 TO 449+85 RT	1
454+60 TO 454+85 RT	1
456+60 TO 456+85 RT	1
464+04 TO 464+29 LT	1
466+04 TO 466+29 LT	1
471+04 TO 471+29 LT	1
TOTAL =	6

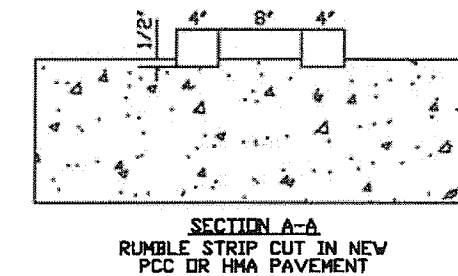

78000650 THERMOPLASTIC PAVEMENT MARKING LINE - 24"

STATION TO STATION	FOOT
459+88 RT	11
461+04 LT	11
TOTAL =	22

X7830090 GROOVING FOR RECESSED PAVEMENT MARKING 25"

STATION TO STATION	FOOT
459+88 RT	11
461+04 LT	11
TOTAL =	22

54390140 INSERTION CULVERT LINER 18"

STATION TO STATION	FOOT
503+16	54
TOTAL =	54

54390180 INSERTION CULVERT LINER 24"

STATION TO STATION	FOOT
513+78 LT	40
TOTAL =	40

