


TREE REPLACEMENT SCHEDULE

STOP LINE SIGN FOR TEMPORARY SIGNALS

CODE NUMBER	SCIENTIFIC NAME	COMMON NAME	SIZE	UNIT	QUANTITY
A2002314	TREE, BETULA NIGRA	RIVER BIRCH	1-3/4" CALIPER	EACH	8
A2005814	TREE, PLANTANUS OCCIDENTALIS	SYCAMORE	1-3/4" CALIPER	EACH	8
A2006514	TREE, QUERCUS BICOLOR	SWAMP WHITE OAK	1-3/4" CALIPER	EACH	10
A2006714	TREE, QUERCUS MACROCARPA	BUR OAK	1-3/4" CALIPER	EACH	8
A2006914	TREE, QUERCUS PALUSTRIS	PIN OAK	1-3/4" CALIPER	EACH	8
C2001148	SHRUB, CEPHALANTHUS OCCIDENTALIS	BUTTON BUSH	4' HEIGHT	EACH	7

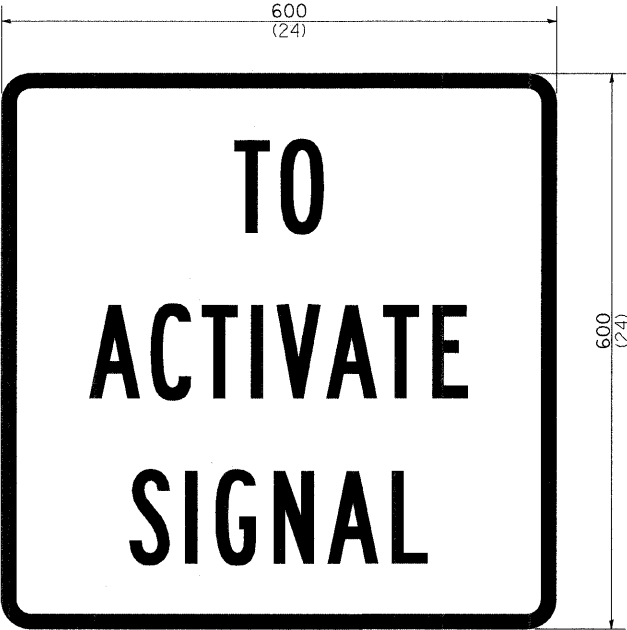

SIZE: 600(24) x 600(24)
 100(4) CAPITAL LETTERS - BLACK
 13(1/2) BORDER - BLACK
 WHITE REFLECTIVE - TYPE AP
 HIGH INTENSITY PRISMATIC SHEETING

GENERAL NOTE:
 THIS SIGN SHALL BE INSTALLED AT THE STOP LINE AS DIRECTED BY ENGINEER.
 ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

NOTE: ALL TREES AND SHRUBS SHALL BE BALLED AND BURLAPPED

REVISED - 8-10-05

REVISED - 1-22-07

TREE REPLACEMENT SCHEDULE 90.4

STOP LINE SIGN FOR TEMPORARY SIGNALS 99.4

REVISED -	REGION 2 / DISTRICT 2 STANDARD	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
REVISED -		309	(17R)B	WHITESIDE	376	122
REVISED -		CONTRACT NO. 64B74				
REVISED -		SCALE: 50.0000' / 1" SHEET NO. OF SHEETS STA. TO STA.	FED. ROAD DIST. NO.	ILLINOIS FED. AID PROJECT		