


FAP 656	FAU 6757	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
IL 29	US 150	*	TAZEWELL	32	22

*D-4 STRUCTURE REPAIR 2008

1. This work shall consist of grading as needed, furnishing, placing, and shaping crushed aggregate around and behind Steel Plate Beam Guardrail posts in accordance with Plan Details.
2. The aggregate shall be deposited, compacted, and shaped by either mechanical or hand methods, in a manner reasonably true to line and grade.
3. The contractor shall have the option of placing the guardrail before or after the aggregate is in place. If the guardrail is placed after the aggregate, then any voids must be filled and the aggregate returned to line and grade.
4. Materials shall meet the following requirements.
 - A. The crushed aggregate shall be CA1 gradation in accordance with Article 1004.01(c) of the Standard Specifications.

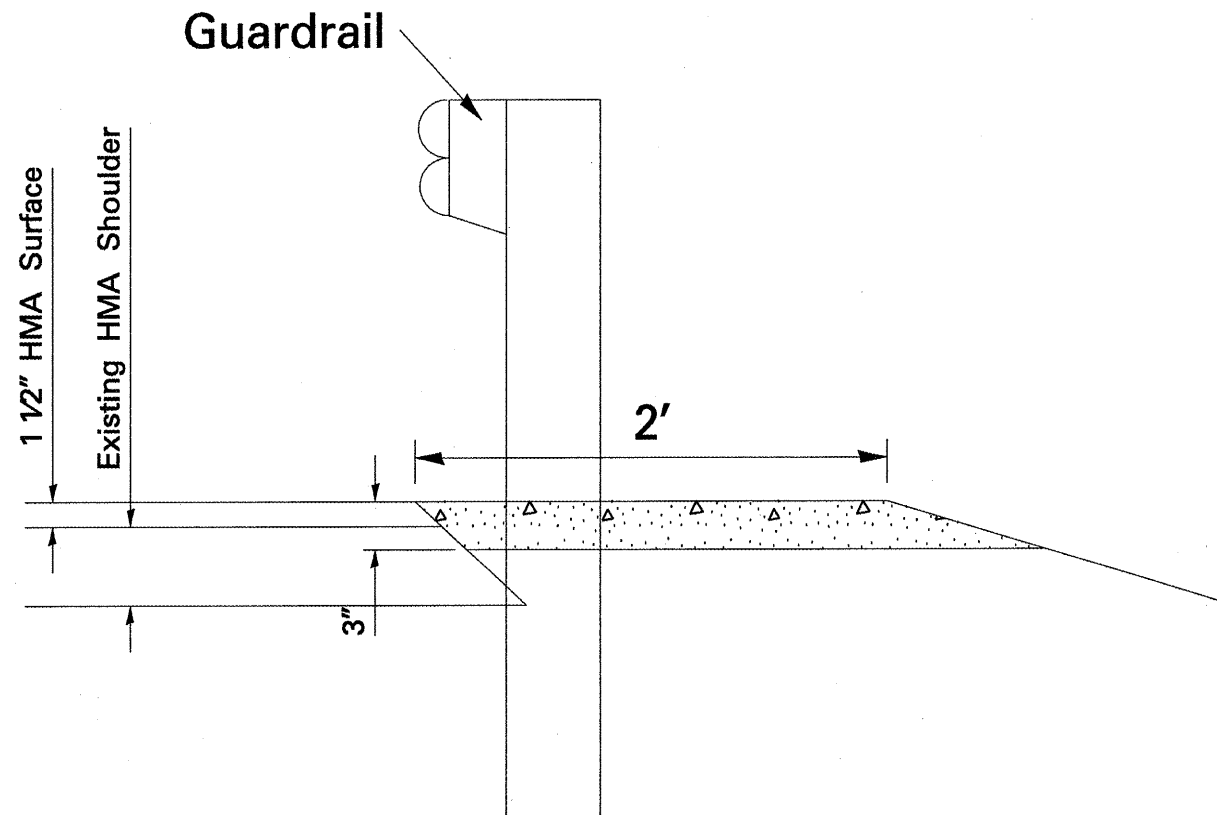

TYPICAL SECTION WITHOUT EROSION CONTROL CURB

REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION	
NAME	DATE		
GEORGE ELIAS	11-08	<p>GUARDRAIL AGG. EROSION CONTROL DETAIL IL 29</p> <p>DATE _____ CHECKED BY _____</p>	