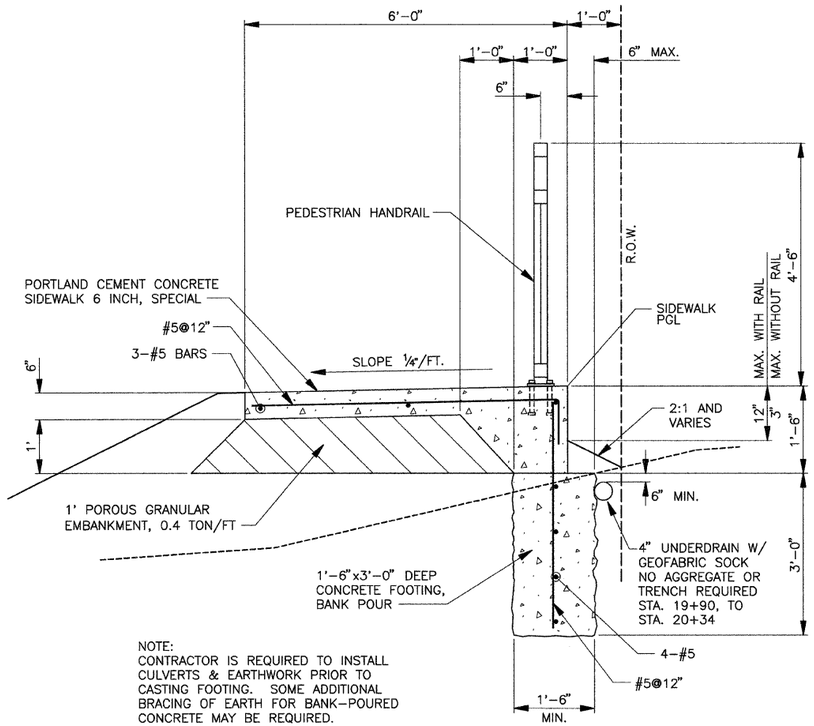

NOTE:
CONTRACTOR IS REQUIRED TO INSTALL CULVERTS & EARTHWORK PRIOR TO CASTING FOOTING. SOME ADDITIONAL BRACING OF EARTH FOR BANK-POURED CONCRETE MAY BE REQUIRED.

DETAIL - PCC SIDEWALK 6 INCH, SPECIAL

ALL REINFORCEMENT BARS SHALL BE EPOXY COATED

FOOTING - CONCRETE	0.17 CY/FT
FORMED CONCRETE	0.17 CY/FT
REINFORCEMENT BARS (EPOXY COATED)	5.5 LB/FT

BILL OF MATERIAL
PCC SIDEWALK 6 INCH, SPECIAL

SEE TYPICAL SECTIONS FOR LOCATIONS

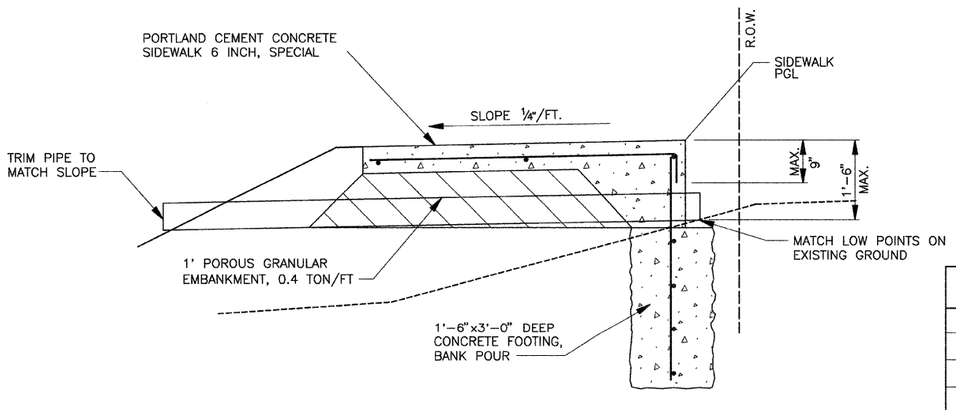

DETAIL - PIPE DRAINS UNDER PCC SIDEWALK 6 INCH, SPECIAL

PIPE DRAINS SHALL BE INCIDENTAL TO THE COST OF PCC SIDEWALK 6 INCH, SPECIAL

PIPE DRAIN 6" LOCATION	LIN. FT.
STA. 17+65 RT.	12'
STA. 17+70 RT.	12'
STA. 19+95 RT.	12'
STA. 20+05 RT.	12'
TOTAL	48'

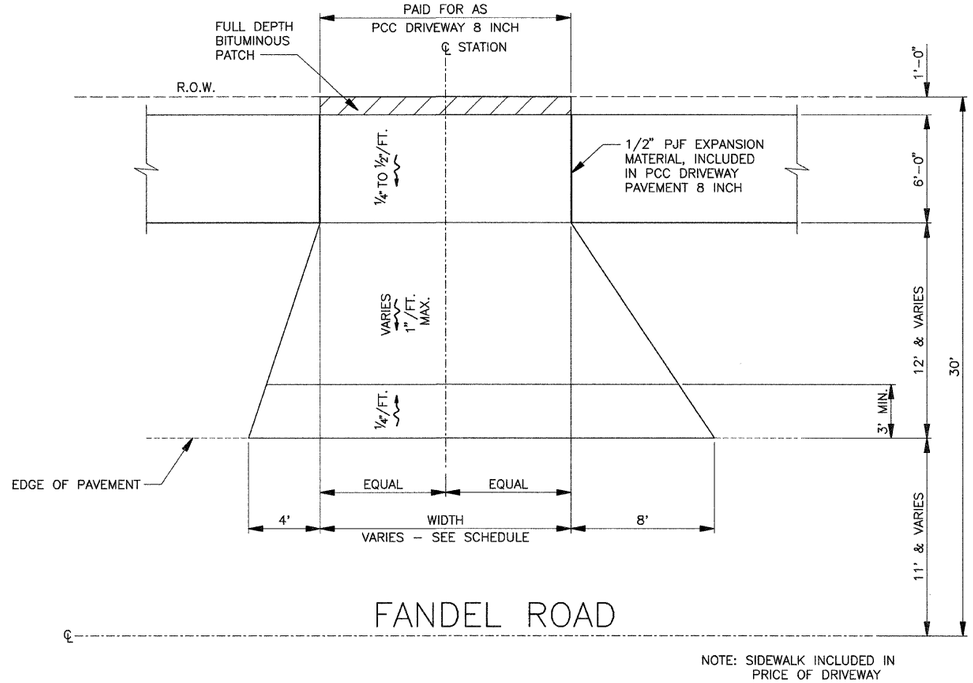

NOTE: SIDEWALK INCLUDED IN PRICE OF DRIVEWAY

DRIVEWAY DETAIL

DRIVEWAY SCHEDULE

DRIVEWAY LOCATION	DRIVEWAY WIDTH	PCC DRIVEWAY PAVEMENT, 8 INCH PAY AREA (SQ YD)	PAVEMENT PATCHING (FULL DEPTH) PAY AREA (SQ YD)
STA. 2+96.8 RT.	15'	38	1.7
STA. 7+21.7 RT.	30'	68	3.3
STA. 11+82 RT.	24'	80	2.7
TOTAL		186	8

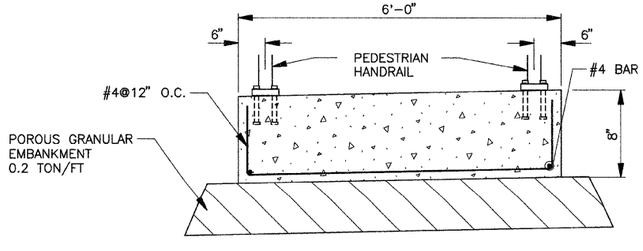

DETAIL - PCC SIDEWALK 8 INCH

STA. 3+50 TO STA. 4+58

FILE NAME = X:\PE\IE\2008\08G083.01\cad\Plans\C5_01-H-DETAILS.dgn

Foth Infrastructure & Environment, LLC	USER NAME = cxl	DESIGNED -	REVISED -
		DRAWN -	REVISED -
	PLOT SCALE = 1:4 '/' IN.	CHECKED -	REVISED -
	PLOT DATE = 4/7/2009	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PCC SIDEWALK AND DRIVEWAY DETAILS

SCALE: | SHEET NO. OF SHEETS | STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	08-00000-00-SW	WOODFORD	21	14
		CONTRACT NO. 89503		
	ILLINOIS FED. AID PROJECT			