


TYPICAL ROADWAY CROSS-SECTION

- * TRANSITION FROM 11.1' EXISTING TO 20' PROPOSED PAVEMENT STA. 48+91.19 TO STA. 49+69.25
- * TRANSITION FROM 20' PROPOSED TO 11.2' EXISTING PAVEMENT STA. 50+30.75 TO STA. 51+30.75

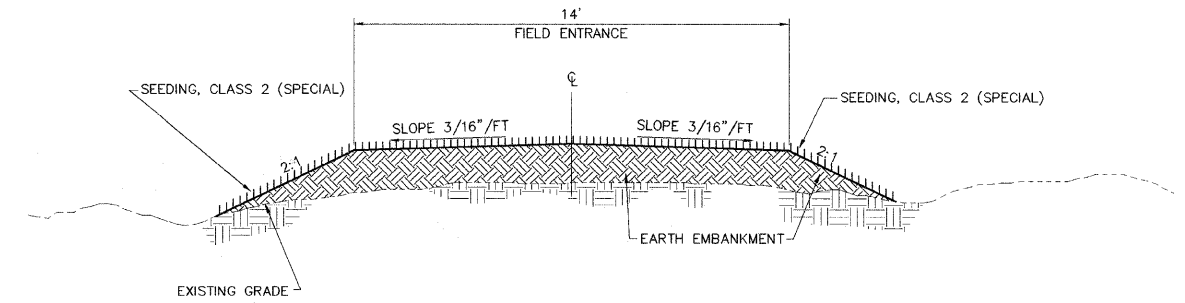

**TYPICAL FIELD ENTRANCE
LT. STA. 49+42**

GENERAL NOTES

1. THIS SECTION SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE PLANS, THE SPECIAL PROVISIONS AND THE "STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION" ADOPTED JANUARY 1, 2007.
2. THE SHRINKAGE FACTOR FOR EMBANKMENT IS 25%.
3. ALL CLEARING AND GRUBBING IS TO BE INCLUDED IN THE UNIT PRICE BID FOR EARTH EXCAVATION.
4. BITUMINOUS SURFACE TREATMENT (A-2) WILL BE COMPLETED BY THE OWNER.

SUMMARY OF QUANTITIES

CODE NO.	ITEM	QUANTITY	UNIT
20200100	EARTH EXCAVATION	7	CU. YD.
20300100	CHANNEL EXCAVATION	174	CU. YD.
20400800	FURNISHED EXCAVATION	217	CU. YD.
25001000	SEEDING, CLASS 2 (SPECIAL)	0.1	ACRE
28100807	STONE DUMPED RIPRAP, CLASS A4	97	TON
40200800	AGGREGATE SURFACE COURSE, TYPE B	135	TON
50100100	REMOVAL OF EXISTING STRUCTURES	1	EACH
50300225	CONCRETE STRUCTURES	18.2	CU. YD.
50300280	CONCRETE ENCASEMENT	2.1	CU. YD.
50400505	PRECAST PRESTRESSED CONCRETE DECK BEAMS (27" DEPTH)	1440	SQ. FT.
50800105	REINFORCEMENT BARS	2300	POUND
* 50900205	STEEL RAILING, TYPE S1	120	FOOT
51201400	FURNISHING STEEL PILES HP 10x42	210	FOOT
51202305	DRIVING PILES	210	FOOT
51203400	TEST PILE STEEL HP 10x42	1	EACH
51500100	NAME PLATES	1	EACH
66503400	BARBED WIRE FENCE REMOVAL	75	FOOT
67100100	MOBILIZATION	1	L. SUM

* SPECIALTY ITEMS

A:\Projects\200701116\DWG\200701116 Typicldts.dwg, 12/15/2008 12:31:52 PM

A:\Projects\200701116\DWG\200701116 Typicldts.dwg