


STATE OF ILLINOIS  
 DEPARTMENT OF TRANSPORTATION  
 PLANS FOR PROPOSED  
**HIGHWAY BRIDGE PROGRAM**

TOWNSHIP ROUTE 95 (MORRIS ROAD)  
 COUNTY UNIT ROAD DISTRICT  
 SECTION 94-01166-00-BR  
 PROJECT ARA-BROS-153(30)  
 JOB NO. C-99-538-08  
 PULASKI SLOUGH

**PULASKI COUNTY**

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
TR 95	94-01166-00-BR	PULASKI	13	1
PROJECT NO. BROS-153(30)		CONTRACT NO. 99327		

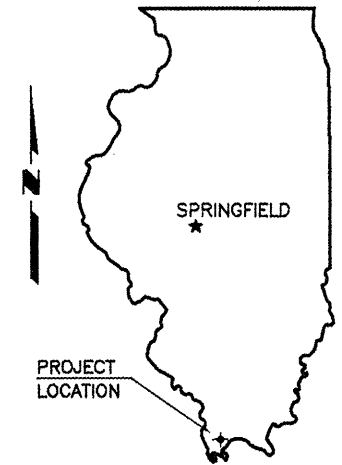

SUMMARY OF QUANTITIES

CODE NO.	PAY ITEM	UNIT	TOTAL
20100500	TREE REMOVAL, ACRES	ACRE	0.1
20200100	EARTH EXCAVATION	CU YD	338
20300100	CHANNEL EXCAVATION	CU YD	360
20400100	BORROW EXCAVATION	CU YD	2425
20800150	TRENCH BACKFILL	CU YD	26
25000200	SEEDING, CLASS 2	ACRE	0.7
25000400	NITROGEN FERTILIZER NUTRIENT	POUND	63
25000500	PHOSPHORUS FERTILIZER NUTRIENT	POUND	63
25000600	POTASSIUM FERTILIZER NUTRIENT	POUND	63
25000700	AGRICULTURAL GROUND LIMESTONE	TON	1.4
25100115	MULCH, METHOD 2	ACRE	0.7
25100630	EROSION CONTROL BLANKET	SQ YD	195
28000250	TEMPORARY EROSION CONTROL SEEDING	POUND	70
28000300	TEMPORARY DITCH CHECKS	EACH	14
28000400	PERIMETER EROSION BARRIER	FOOT	160
28000500	INLET AND PIPE PROTECTION	EACH	2
28100807	STONE DUMPED RIPRAP, CLASS A4	TON	189
40200800	AGGREGATE SURFACE COURSE, TYPE B	TON	845
50100100	REMOVAL OF EXISTING STRUCTURES	EACH	1
50105220	PIPE CULVERT REMOVAL	FOOT	32
50200100	STRUCTURE EXCAVATION	CU YD	11
50300225	CONCRETE STRUCTURES	CU YD	19.4
50300280	CONCRETE ENCASEMENT	CU YD	2.1
50400505	PRECAST PRESTRESSED CONCRETE DECK BEAMS (27" DEPTH)	SQ FT	1440
50800105	REINFORCEMENT BARS	POUND	2440
* 50900205	STEEL RAILING, TYPE S1	FOOT	120
51200957	FURNISHING METAL SHELL PILES 12" X 0.250"	FOOT	479
51202305	DRIVING PILES	FOOT	479
51203200	TEST PILE METAL SHELLS	EACH	1
51500100	NAME PLATES	EACH	1
54213471	END SECTIONS 36"	EACH	2
542D0223	PIPE CULVERTS, CLASS D, TYPE 1 18"	FOOT	28
542D0241	PIPE CULVERTS, CLASS D, TYPE 1 36"	FOOT	42
542D1063	PIPE CULVERTS, CLASS D, TYPE 2 18"	FOOT	50
67100100	MOBILIZATION	L SUM	1
* 78201000	TERMINAL MARKER - DIRECT APPLIED	EACH	4

\* SPECIALTY ITEM


JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION  
 J.U.L.I.E. 1-800-892-0123  
 CONTACT 48 HOURS BEFORE EXCAVATING



11-21-08

*Edward W. Miller*

Edward W. Miller  
 PROFESSIONAL ENGINEER  
 #062-025277  
 EXPIRES NOV. 30, 2009

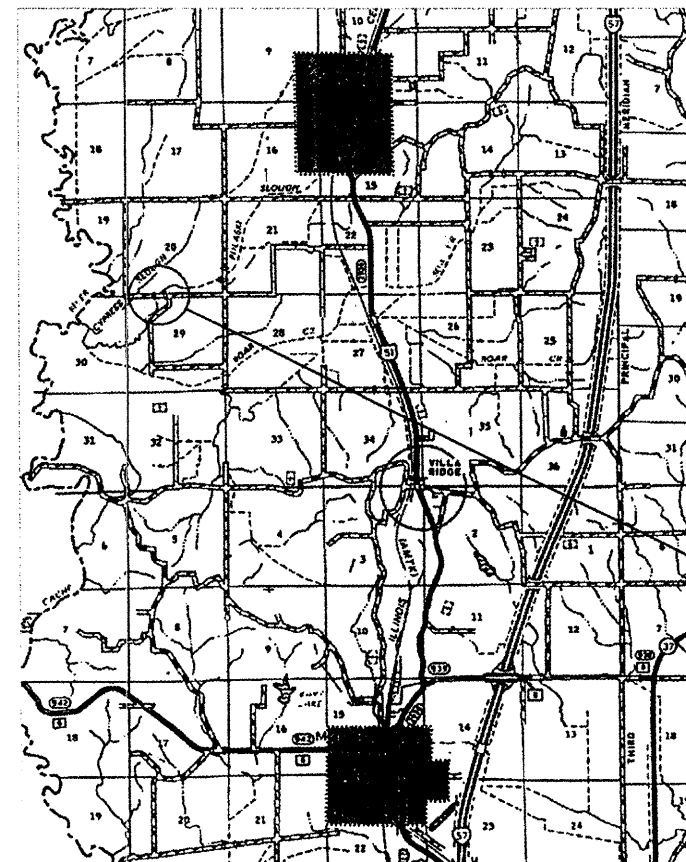

LOCATION MAP

SCALE: 1" = 2 MILES

NET LENGTH OF IMPROVEMENT = 725.00 FT. = 0.1373 MILES

INDEX OF SHEETS

- COVER SHEET
- PLAN AND PROFILE SHEET
- GENERAL PLAN AND ELEVATION SHEET
- SUPERSTRUCTURE DETAILS
- PPC DECK BEAMS DETAILS (27" X 3'-0")
- PPC DECK BEAMS DETAILS (27" X 3'-0")
- PPC DECK BEAMS DETAILS (27" X 4'-0")
- PPC DECK BEAMS DETAILS (27" X 4'-0")
- ABUTMENTS
- STEEL RAILING
- NAME PLATES
- PILE DETAILS
- CROSS SECTIONS:
  - STANDARDS 000001-05 STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
  - 280001-04 TEMPORARY EROSION CONTROL SYSTEMS
  - 635006-03 REFLECTOR AND TERMINAL MARKER PLACEMENT
  - 701901-01 TRAFFIC CONTROL DEVICES
  - BLR-21-7 TRAFFIC CONTROL

CLASSIFICATION : LOCAL ROAD (RURAL)  
 ADT : 25  
 DESIGN SPEED : 30 MPH

ILLINOIS DEPARTMENT OF TRANSPORTATION	
Approved	<u>11/21/2008</u> <i>Stacy Camhart</i> Pulaski County Engineer
Passed	<u>12-16-08</u> <i>Keith Wiley</i> District 9 Engineer of Local Roads and Streets
Releasing for Bid Based on Limited Review	<u>12-16-08</u> <i>Mary C. Zami</i> Deputy Director of Highways, Region 5 Engineer

E. MILLER ENGINEERING, INC.  
 CONSULTING ENGINEERS  
 HARRISBURG, ILLINOIS

CONTRACT NO. 99327