

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

FAP RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	D4 HT PVMNT MRK RPR 26-15	VARIOUS	4	1
		ILLINOIS	CONTRACT NO. 46678	

INDEX OF SHEETS:

1. COVER SHEET
2. SUMMARY OF QUANTITIES
3. TYPICAL WORK ORDER
4. TYPICAL PAVEMENT MARKING SUMMARY

HIGHWAY STANDARDS:

- 701301-04
- 701306-04
- 701311-03
- 701400-12
- 701406-13
- 701426-09
- 701427-05
- 701901-11
- 780001-05
- 781001-04
- 701602-10

DISTRICT STANDARDS:

- 780001-D4

PROJECT DESCRIPTION:

REPLACEMENT OF PAVEMENT MARKINGS AT VARIOUS LOCATIONS IN DISTRICT 4.



J.U.L.I.E.  
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION  
1-800-892-0123  
OR 811

PROJECT ENGINEER: TREVOR HANSON (309) 671-4466  
PROJECT MANAGER: ANNA GHIDINA (309) 671-4460

CATALOG NO. 036796-00D  
CONTRACT NO. 46678

PROPOSED  
HIGHWAY PLANS

VARIOUS ROUTES  
D4 HT PVMNT MRK RPR 26-15  
VARIOUS COUNTIES  
M-60-015-26

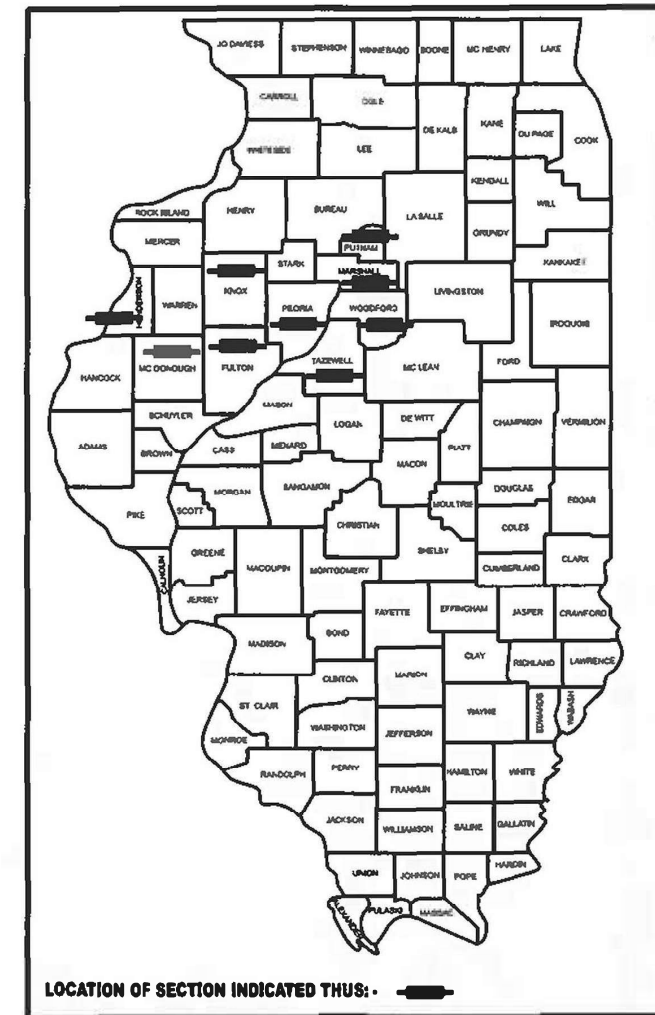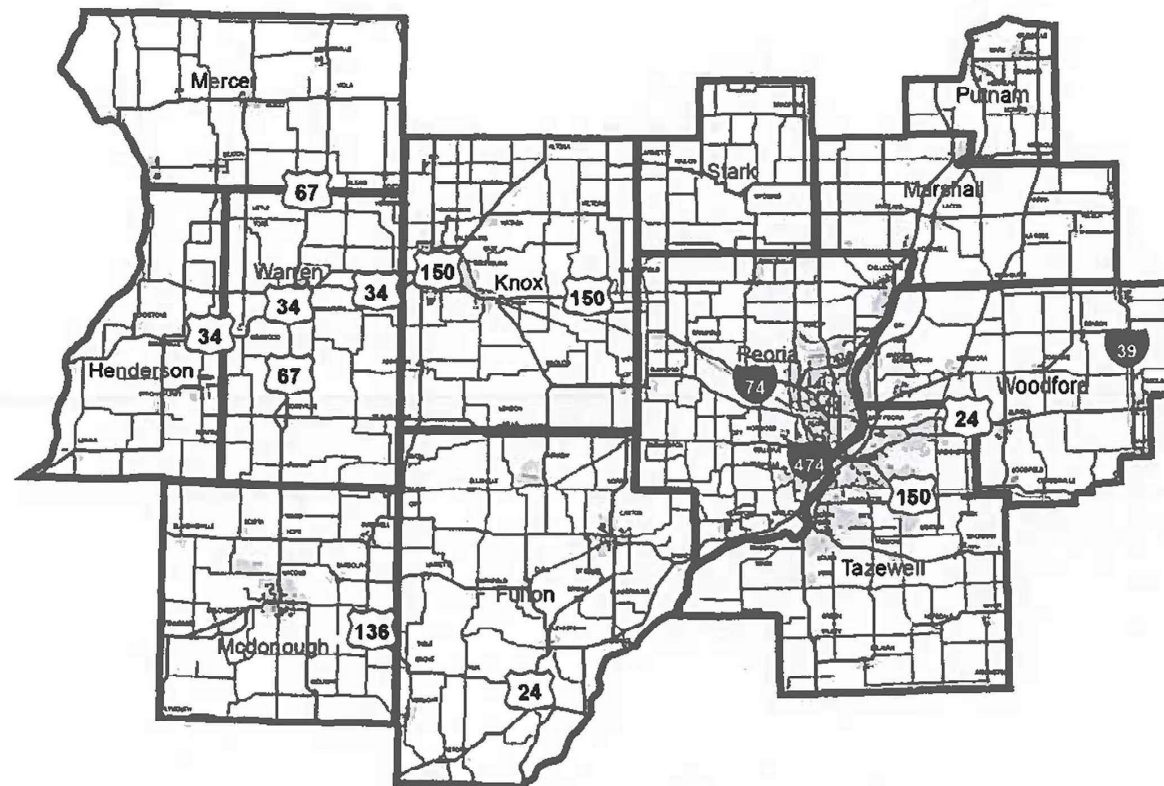

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

SUBMITTED March 20 20 26  
Kessia L. Darnell  
REGIONAL ENGINEER

May 8 20 26  
[Signature]  
ENGINEER OF DESIGN AND ENVIRONMENT

May 8 20 26  
[Signature]  
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY  
OF THE STATE OF ILLINOIS

NO COMMITMENTS HAVE BEEN MADE IN CONJUNCTION WITH THIS PROJECT.

### SUMMARY OF QUANTITIES

CODE 0021  
 VARIOUS COUNTIES  
 100% STATE  
 RURAL  
 TOTAL QTY

ITEM NUMBER	ITEM DESCRIPTION	UNIT	TOTAL QTY
78004640	PREFORMED PLASTIC PAVEMENT MARKING, TYPE D - STANDARD - LINE 8"	FOOT	21,912.0
78009000	MODIFIED URETHANE PAVEMENT MARKING - LETTERS AND SYMBOLS	SQ FT	15,604.0
78009004	MODIFIED URETHANE PAVEMENT MARKING - LINE 4"	FOOT	1,016,429.5
78009006	MODIFIED URETHANE PAVEMENT MARKING - LINE 6"	FOOT	2,035,362.5
78009008	MODIFIED URETHANE PAVEMENT MARKING - LINE 8"	FOOT	188,002.3
78009012	MODIFIED URETHANE PAVEMENT MARKING - LINE 12"	FOOT	16,829.0
78009024	MODIFIED URETHANE PAVEMENT MARKING - LINE 24"	FOOT	13,550.0
78011000	GROOVING FOR RECESSED PAVEMENT MARKING, LETTERS AND SYMBOLS	SQ FT	468.0
78011025	GROOVING FOR RECESSED PAVEMENT MARKING 5"	FOOT	273,162.0
78011035	GROOVING FOR RECESSED PAVEMENT MARKING 7"	FOOT	1,223,343.0
78011045	GROOVING FOR RECESSED PAVEMENT MARKING 9"	FOOT	34,668.0
78011065	GROOVING FOR RECESSED PAVEMENT MARKING 13"	FOOT	300.0
78011125	GROOVING FOR RECESSED PAVEMENT MARKING 25"	FOOT	248.0
78300202	PAVEMENT MARKING REMOVAL - WATER BLASTING	SQ FT	10,956.0

MODEL: Default  
 FILE NAME: c:\pwwork\hanson\0039664\SIGNALS Complete.dgn

USER NAME = trevor.hanson	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 1/7/2025	DATE -	REVISED -

STATE OF ILLINOIS  
 DEPARTMENT OF TRANSPORTATION

SUMMARY OF QUANTITIES

SCALE: SHEET OF SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	D4 HT PVMNT MRK RPR 26-15	VARIOUS	4	2
CONTRACT NO. 46678				
ILLINOIS FED. AID PROJECT				

# WORK ORDER FORM

## WORK ORDER

### DISTRICT 4 HIGH-TYPE PAVEMENT MARKING REPAIR 26-15

CONTRACT: 46678	
JOB: M-60-015-26	
WORK ORDER #	
DATE	

LOCATION DESCRIPTION: \_\_\_\_\_

CODE NUMBER	ITEM DESCRIPTION	UNIT	QUANTITY	UNIT PRICE	ITEM COST
78004640	PREFORMED PLASTIC PAVEMENT MARKING, TYPE D - STANDARD - LINE 8"	SQ FT			
78009000	MODIFIED URETHANE PAVEMENT MARKING - LETTERS AND SYMBOLS	FOOT			
78009004	MODIFIED URETHANE PAVEMENT MARKING - LINE 4"	FOOT			
78009006	MODIFIED URETHANE PAVEMENT MARKING - LINE 6"	FOOT			
78009008	MODIFIED URETHANE PAVEMENT MARKING - LINE 8"	FOOT			
78009012	MODIFIED URETHANE PAVEMENT MARKING - LINE 12"	FOOT			
78009024	MODIFIED URETHANE PAVEMENT MARKING - LINE 24"	SQ FT			
78011000	GROOVING FOR RECESSED PAVEMENT MARKING, LETTERS AND SYMBOLS	FOOT			
78011025	GROOVING FOR RECESSED PAVEMENT MARKING 5"	FOOT			
78011035	GROOVING FOR RECESSED PAVEMENT MARKING 7"	FOOT			
78011045	GROOVING FOR RECESSED PAVEMENT MARKING 9"	FOOT			
78011065	GROOVING FOR RECESSED PAVEMENT MARKING 13"	FOOT			
78011125	GROOVING FOR RECESSED PAVEMENT MARKING 25"	SQ FT			
78300202	PAVEMENT MARKING REMOVAL - WATER BLASTING	FOOT			
<b>WORK ORDER TOTAL COST</b>					

DISTRICT 4 CONTACT	
Name:	
Telephone:	
Cell Phone:	

Submitted By: \_\_\_\_\_  
Regional Engineer

Date: \_\_\_\_\_

Approved By: \_\_\_\_\_  
Traffic Operations Engineer

Date: \_\_\_\_\_

LOCATION	PREFORMED PLASTIC PAVEMENT MARKING, TYPE D - STANDARD - LINE 8"	GROOVING FOR RECESSED PAVEMENT MARKING 9"
	CONTRAST SKIP DASH	
	FOOT	FOOT
I-74 FROM MM 88.2 TO MM 92.1	21912.0	21912.0
ALL OTHER PAVEMENT MARKING QUANTITIES SHALL BE DIRECTED BY THE ENGINEER PER WORK ORDER.		

**NOTES:**

- THE PREFORMED PLASTIC PAVEMENT MARKING, TYPE D - STANDARD - LINE 8" SHALL BE CONTRAST MARKINGS, CONSISTING OF 1.5" BLACK NONREFLECTIVE TAPE FUSED TO EACH SIDE OF THE 5.5" WHITE MARKING.**

MODEL: Default  
FILE NAME: c:\pwwork\work\hanson\0039664\SIGNALS\Complete.dgn

USER NAME = trevor.hanson	DESIGNED -	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>TYPICAL WORK ORDER</b>	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
	DRAWN -	REVISED -			VAR.	D4 HT PVMNT MRK RPR 26-15	VARIOUS	4	3	
	CHECKED -	REVISED -			CONTRACT NO. 46678					
PLOT DATE = 1/7/2025	DATE -	REVISED -			SCALE:	SHEET	OF	SHEETS	STA.	TO
ILLINOIS FED. AID PROJECT										

