


F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
N/A	26-00000-00-PP	MERCER	6	1
		ILLINOIS	CONTRACT NO. 89892	

2026 PAVEMENT PRESERVATION PROGRAM

INDEX OF SHEETS

- 1 COVER SHEET
- 2 GENERAL NOTES, LIST OF STANDARDS & SUMMARY OF QUANTITIES
- 3 SCHEDULES OF QUANTITIES
- 4-6 PLAN SHEETS

VARIOUS ROUTES (CH 2, CH 9 & CH 16)
SECTION 26-00000-00-PP
PROJECT PVHM(146)

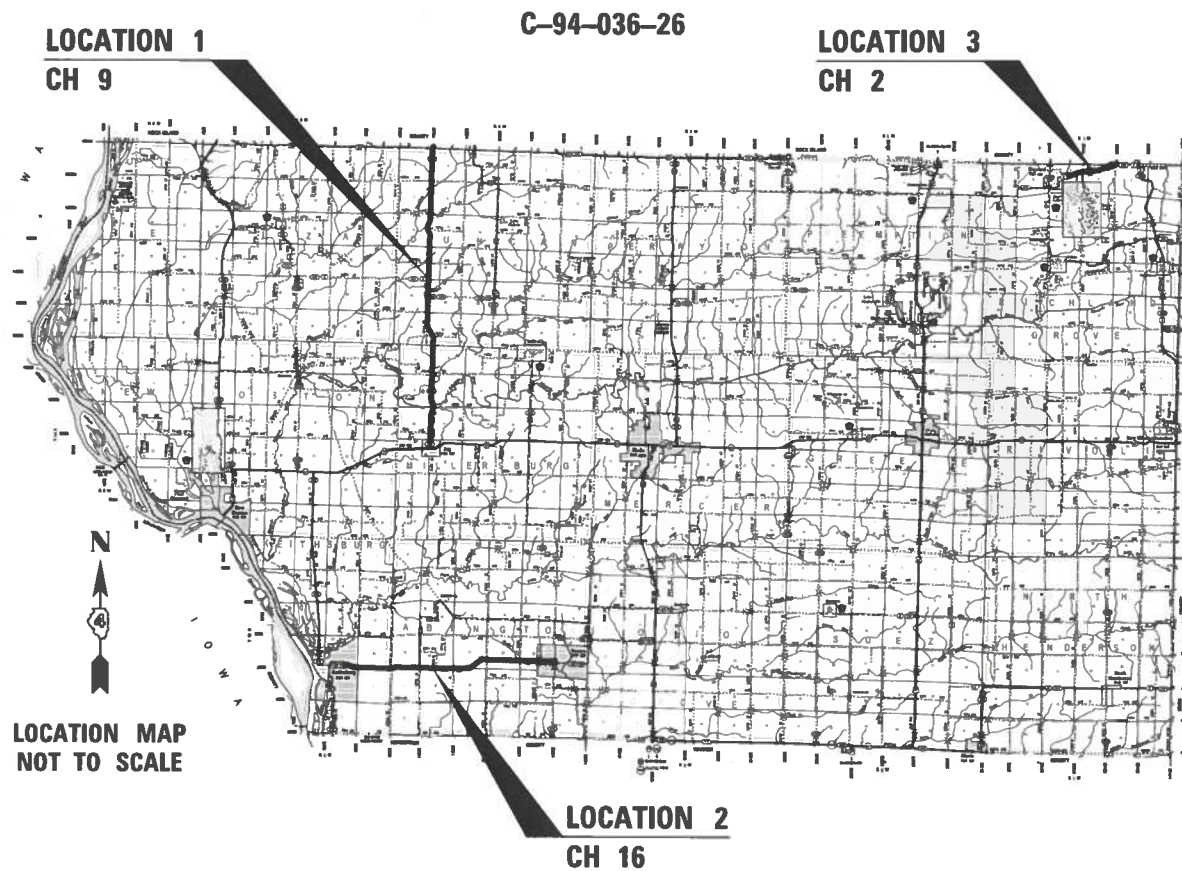


LOCATION MAP NOT TO SCALE

J.U.L.I.E.
 JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
 1-800-892-0123
 OR 811

PROJECT MANAGER / ENGINEER: SHANE LARSON, P.E.

CATALOG NO. 036767-00

CONTRACT NO. 89892



Shane Larson
 SIGNATURE
 ENGINEER'S SEAL

APPROVED	March 12th	20 26
Acting Mercer County Engineer LOCAL AGENCY OFFICIAL		
PASSED	April 9	20 26
District Four Engineer of LOCAL ROADS & STREETS		
Releasing For Bid Based on Limited Review	0410	20 26
Region Three Engineer		
STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION		

PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS

GENERAL NOTES

ALL REFERENCES TO THE "DEPARTMENT" OR "ENGINEER" IN THE IDOT STANDARD SPECIFICATIONS SHALL ALSO INCLUDE THE MERCER COUNTY ENGINEER.

PROPERTY OWNER ACCESS REQUIREMENT

ACCESS MUST BE MAINTAINED TO ALL EXISTING PROPERTIES DURING CONSTRUCTION PER ARTICLE 107.09 UNLESS ARRANGEMENTS ARE MADE IN WRITING BY THE CONTRACTOR WITH THE PROPERTY OWNERS WITH A COPY TO THE ENGINEER FOR SHORT-TERM CLOSURES.

LIST OF HIGHWAY STANDARDS

- 701306-04 LANE CLOSURE, 2L, 2W, SLOW MOVING OPERATIONS DAY ONLY, FOR SPEEDS ≥ 45 MPH
- 701901-11 TRAFFIC CONTROL DEVICES
- BLR 18-6 TRAFFIC CONTROL DEVICES - DAY LABOR MAINTENANCE

SUMMARY OF QUANTITIES

CODE NO.	DESCRIPTION	UNIT	TOTAL QUANTITY
40500061	CAPE SEAL	SQ YD	22670
67100100	MOBILIZATION	L SUM	1
* 78001110	PAINT PAVEMENT MARKING - LINE 4"	FOOT	34633
X7010216	TRAFFIC CONTROL AND PROTECTION, (SPECIAL)	L SUM	1
LR403400	BITUMINOUS MATERIALS (COVER AND SEAL COATS)	TON	853
LR403500	COVER COAT AGGREGATE	TON	2508
# Z0076600	TRAINEES	HOURL	500
LR403600	SEAL COAT AGGREGATE	TON	2508
# Z0076604	TRAINEES TRAINING PROGRAM GRADUATE	HOURL	500

* SPECIALTY ITEM # 0042

MODEL Default
FILE NUMBER: V2200099 - Mercer Co. IL-Project Planning 2026 Pavement Preservation Project\CADD\CADD Sheets\30099-shc-2-gmmete & 500.dgn



USER NAME = Shughes	DESIGNED - WSL	REVISED -
	DRAWN - SRH	REVISED -
PLOT SCALE = 2,000' / in.	CHECKED - WSL	REVISED -
PLOT DATE = 3/12/2026	DATE - ##-##-26	REVISED -



**2026 PAVEMENT PRESERVATION PROGRAM - VARIOUS ROUTES
GENERAL NOTES, LIST OF STANDARDS & SUMMARY OF QUANTITIES**

SCALE: N/A SHEET 1 OF 1 SHEETS STA. N/A TO STA. N/A

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
N/A	26-00000-00-PP	MERCER	6	2
CONTRACT NO. 89892			ILLINOIS FED. AID PROJECT	

NOTES:

BITUMINOUS SURFACE TREATMENT A-2 AGGREGATE SHALL E CA-16. APPLICATION RATE SHALL BE 25 LBS/SY.

BITUMINOUS SURFACE TREATMENT A-2 BITUMINOUS MATERIALS SHALL BE PG 52-28. APPLICATION RATE SHALL BE 0.4 GAL/SY.



BITUMINOUS SURFACE TREATMENT A-2
 GROSS LENGTH = 48,225'± (9.133 MILES)
 NET LENGTH = 47,780'± (9.049 MILES)
 WIDTH = 22'

BRIDGE OMISSIONS:

- A = 250'
- B = 108'
- C = 18'
- D = 69'

MODEL Default
 FILE D:\MSR\26-00000-00-PP\2026 Pavement Preservation Project\CAD\CADD Sheets\30099-4-1-26.dgn



USER NAME = SHughes	DESIGNED - WSL	REVISED -
	DRAWN - SRH	REVISED -
PLOT SCALE = 4000,000 ' / In.	CHECKED - WSL	REVISED -
PLOT DATE = 3/12/2026	DATE - ##-##-26	REVISED -



2026 PAVEMENT PRESERVATION PROGRAM – VARIOUS ROUTES
LOCATION 1 (CH 9) PLAN

SCALE: N/A SHEET 1 OF 1 SHEETS STA. N/A TO STA. N/A

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
N/A	26-00000-00-PP	MERCER	6	4
CONTRACT NO. 89892				
ILLINOIS		FED. AID PROJECT		

NOTES:

BITUMINOUS SURFACE TREATMENT A-2 AGGREGATE SHALL E CA-16. APPLICATION RATE SHALL BE 25 LBS/SY.

BITUMINOUS SURFACE TREATMENT A-2 BITUMINOUS MATERIALS SHALL BE PG 52-28. APPLICATION RATE SHALL BE 0.4 GAL/SY.



BITUMINOUS SURFACE TREATMENT A-2
 LENGTH = (34,287' ± (6.49 MILES))
 WIDTH = 22'

MODEL Default
 FILE NAME: V:\200929 - Mercer Co. IL-Project Planning\2026 Pavement Preservation Project\CAD\CADD Sheets\300929-415-2a1a.dgn



USER NAME = SHUGHES	DESIGNED - WSL	REVISED -
PLOT SCALE = 4000,000' / In.	DRAWN - SRH	REVISED -
PLOT DATE = 3/12/2026	CHECKED - WSL	REVISED -
	DATE - ##-##-26	REVISED -



2026 PAVEMENT PRESERVATION PROGRAM - VARIOUS ROUTES			
LOCATION 2 (CH 16) PLAN			
SCALE: N/A	SHEET 1 OF 1 SHEETS	STA. N/A	TO STA. N/A

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
N/A	26-00000-00-PP	MERCER	6	5
CONTRACT NO. 89892				
ILLINOIS FED. AID PROJECT				

NOTES:

BITUMINOUS SURFACE TREATMENT A-1 AGGREGATE SHALL BE CA-16. APPLICATION RATE SHALL BE 25 LBS/SY.

BITUMINOUS SURFACE TREATMENT A-1 BITUMINOUS MATERIALS SHALL BE EITHER CRS-2P OR HFRS-2P. APPLICATION RATE SHALL BE 0.4 GAL/SY.

END IMPROVEMENT
105' ± WEST OF
CR 3200 E



BEGIN IMPROVEMENT
WEST EDGE OF 4TH AVE

LOCATION 3

CAPE SEAL & PAVEMENT MARKING
LENGTH = 9,274' ± (1.76 MILES)
WIDTH = 22'

MODEL Default
FILE NUMBER: 20260099 - Mercer Co. IL-Project Planning/2026 Pavement Preservation Project/CAADD/CADD Sheets/20099-sh-h-6-26.dgn



USER NAME = SHUGHES	DESIGNED - WSL	REVISED -
PLOT SCALE = 1000,000' / In.	DRAWN - SRH	REVISED -
PLOT DATE = 3/12/2026	CHECKED - WSL	REVISED -
	DATE - ##-##-26	REVISED -



2026 PAVEMENT PRESERVATION PROGRAM - VARIOUS ROUTES
LOCATION 3 (CH 2) PLAN

SCALE: N/A SHEET 1 OF 1 SHEETS STA. N/A TO STA. N/A

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
N/A	26-00000-00-PP	MERCER	6	6
CONTRACT NO. 89892			ILLINOIS FED. AID PROJECT	