

STABILIZED CONSTRUCTION ENTRANCE PLAN 14' Min Fitter Fabric (Included) SECTION A-A 6'~ 7" Reinforced Concrete Drain Space SECTION B-B

STABILIZED CONSTRUCTION ENTRANCE PLAN

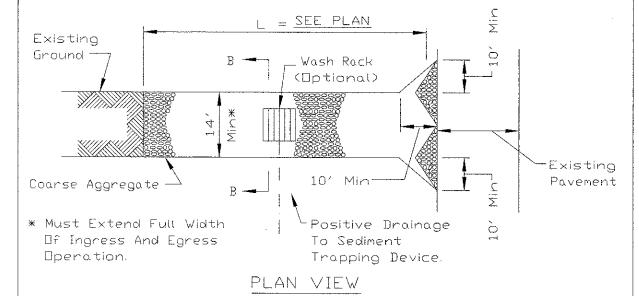

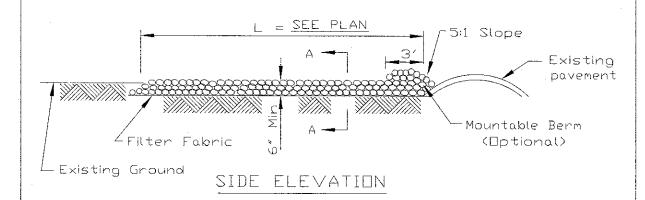

NOTES:

- 1 Filter fabric shall meet the requirements of material specification 592 GEBTEXTILE, Table I or 2, Class I, II or IV and shall be placed over the cleared area prior to the placing of rock.
- 2.Rock or reclaimed concrete shall meet one of the following IDOT coarse aggregate gradation, CA-1 and be placed according to construction specification 25 RDCKFILL using placement Method 1 and Class III compaction.
- 3. Any drainage facilities required because of washing shall be constructed according to manufacturers specifications.
- 4. If wash racks are used they shall be installed according to the manufacturer's specifications.

REFERENCE		
Project		
Designed	Date	
Checked	Date	
Approved	Date	



IL-630 SHEET 1 DF 2 DATE 8-18-94

STANDARD DWG. NO.



REFERENCE

Project

Designed

Checked Approved

> DESIGNED REVISEO USER NAME = jkjelimen ORAWN REVISED -PLOT SCALE = 2.0000 '/ 10. CHECKED REVISED 4/8/2013 REVISED

Date

Date

Date

MILLENNIUM TRAIL LAKE COUNTY FOREST PRESERVES

STABILIZED CONTRUCTION ENTRANCE DETAIL **ROLLINS ROAD UNDERPASS** SHEET NO. OF SHEETS STA.

SECTION 12-F3000-01-BT LAKE 118 37 CONTRACT NO. 63807

STANDARD DWG. NO.

SHEET 2 OF 2

DATE 8-18-94

IL-630