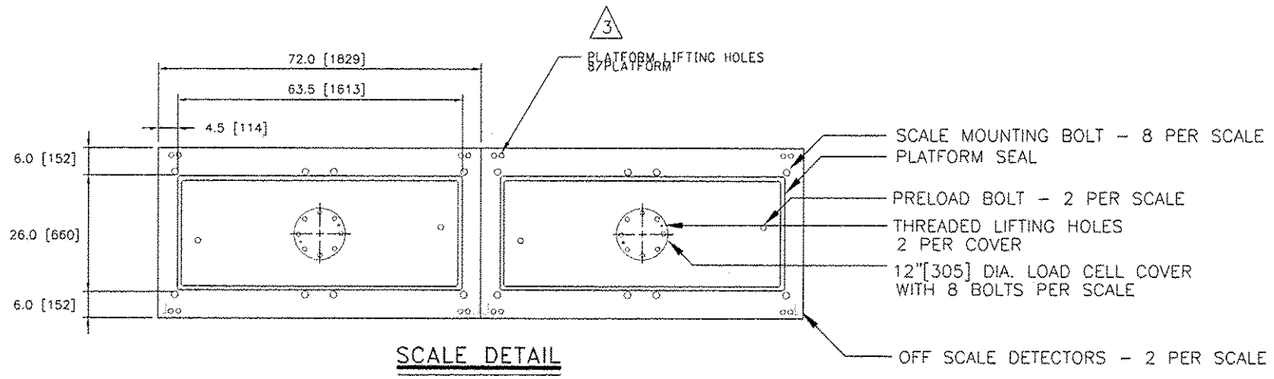

SCALE DETAIL

NOTES:

1. REINFORCEMENTS AND DOWELS AS SHOWN ARE MINIMUM REQUIREMENTS AND MAY BE SUPERCEDED BY STATE CONSTRUCTION CODES.
2. FOR PCC PAVEMENTS INSTALL 1-1/8"[28.5]ø x 16"[406] EPOXY COATED DOWELS IN 1-1/4"[19]ø x 8"[203] DEEP HOLE @ 16"[406] O.C. SECURE DOWEL INTO HOLE WITH EPOXY. ENSURE DOWELS ARE EXACTLY 90° TO LONGITUDINAL PAVEMENT DIRECTION BOTH VERTICALLY AND HORIZONTALLY.

3 SEE 69028801 FOR LIFTING PROCEDURE.

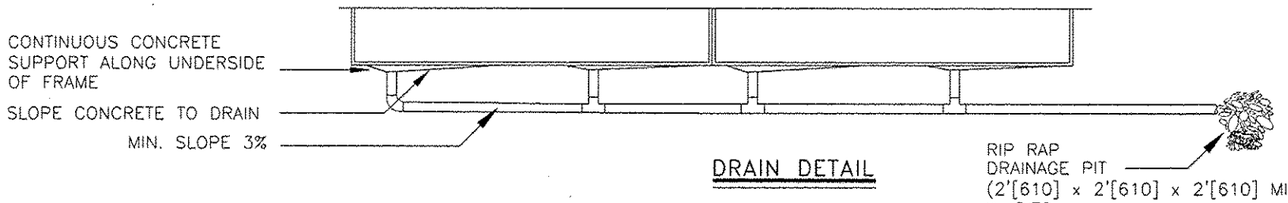

DRAIN DETAIL

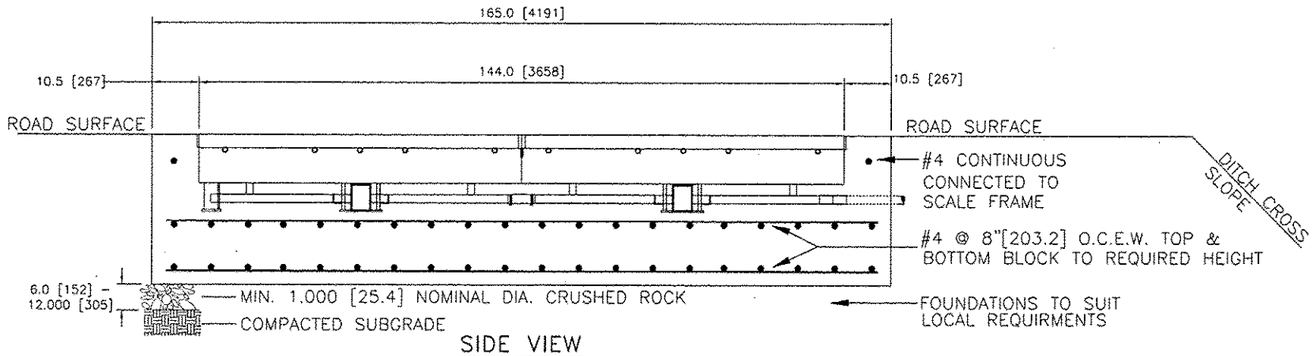

SIDE VIEW

DRAIN AND J-BARS OMITTED FOR CLARITY

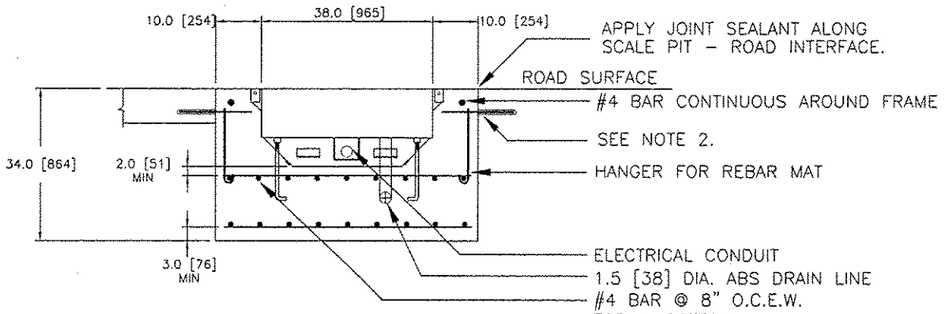

END VIEW

FILE NAME = c:\pw_work\pwidot\sparksgw\d0216368\D672505-SHT-WIM.dgn	USER NAME = sparksgw	DESIGNED -	REVISED -
		DRAWN -	REVISED -
	PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED -
Default	PLOT DATE = May-14-2013 01:59:57PM	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

WEIGH IN MOTION DETAILS

SCALE: | SHEET 12 OF 12 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
55	68-2WS-2	MONTGOMERY	124	100
		CONTRACT NO. 72505		
	ILLINOIS FED. AID PROJECT			