### STANDARD BAR SPLICER ASSEMBLY

Minimum Lap Lengths						
Bar size to be spliced	Table 1	Table 2	Table 3	Table 4	Table 5	Table 6
3, 4	1'-5''	1'-11''	2'-1''	2'-4''	2'-7"	2'-11''
5	1'-9''	2'-5"	2'-7''	2'-11''	3'-3''	3′-8′′
6	2'-1''	2'-11''	3'-1''	3′-6′′	3'-10''	4'-5''
7	2'-9''	3′-10′′	4'-2''	4'-8''	5′-2′′	5′-10′′
8	3′-8′′	5′-1′′	5′-5′′	6'-2''	6'-9''	7′-8′′
9	4'-7''	6′-5′′	6′-10′′	7′-9′′	8'-7''	9'-8''

Table 1: Black bar, 0.8 Class C

Table 2: Black bar, Top bar lap, 0.8 Class C

Table 3: Epoxy bar, 0.8 Class C

Table 4: Epoxy bar, Top bar lap, 0.8 Class C


Table 5: Epoxy bar, Class C

Table 6: Epoxy bar, Top bar top, Class C

Threaded splicer bar length = min. lap length +  $1\frac{1}{2}$ " + thread length


\* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.

Location	Bar	No. assemblies	Table for minimum
	size	required	lap length
Appr. Slab	#4	50 (EB) & 50 (WB)	3
Appr. Slab	#5	172 (EB) & 172 (WB)	3

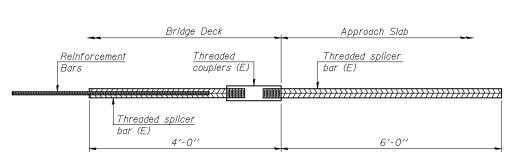

# BAR SPLICER ASSEMBLY FOR #5 BAR ON INTEGRAL OR SEMI-INTEGRAL ABUTMENTS


No, required =

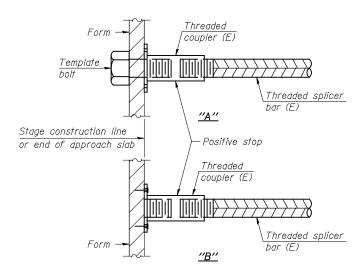

#### INSTALLATION AND SETTING METHODS


"A": Set bar splicer assembly by means of a template bolt. "B" : Set bar splicer assembly by nailing to wood forms or cementing to steel forms.

(E): Indicates epoxy coating.

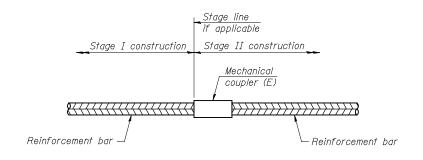

#### STANDARD MECHANICAL SPLICER

Location	Bar size	No. assemblies required

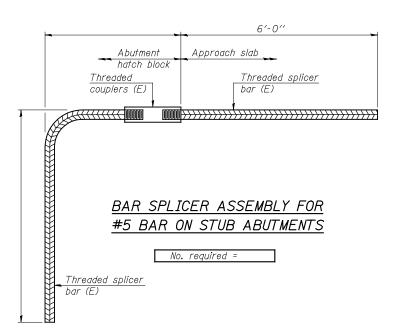

## NOTES

Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi yield strength.

All reinforcement shall be lapped and tied to the splicer bars. Bar splicer assemblies shall be epoxy coated according to the requirements

for reinforcement bars. See Section 508 of the Standard Specifications. See approved list of bar splicer assemblies and mechanical splicers for alternatives.

BSD-1

1-27-12

တဲ့ 🛮					
2	FILE NAME =	USER NAME = DCD	DESIGNED - CMV	REVISED -	
۳	\0840163-72C88-010-barsplicer.dgn		CHECKED - DCD	REVISED -	
Johnson, Depp & Quisenberry  CONSULTING ENGINEERS  Springfield, Illinois	PLOT SCALE =	DRAWN - P. Ray	REVISED -		
	PLOT DATE = 04/02/2013 15:19:05	CHECKED - DCD	REVISED -		
٠, ٠					-

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION** 

SECTION 72 (84-10-3)RS-5 STRUCTURE NO. 084-0163(EB) & 084-0164(WB) STA. 799+18.00

PART B - SHEET 59 of 67 COUNTY SANGAMON 95 87 CONTRACT NO. 72C88

BAR SPLICER ASSEMBLY AND MECHANICAL SPLICER DETAILS

SHEET NO, 10 OF 10 SHEETS