
SEEDING & MULCHING

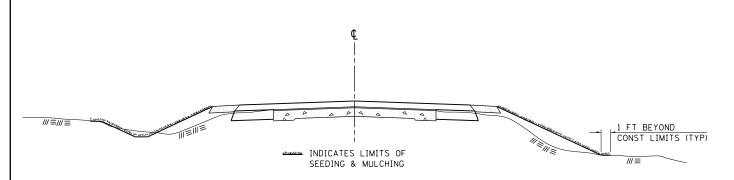

GENERAL NOTES

IN GENERAL, ALL EARTH SURFACES DISTURBED DURING CON-STRUCTION OPERATIONS SHALL BE SEEDED AND MULCHED UPON COMPLETION OF ALL GRADING OPERATIONS.

FERTILIZER NUTRIENTS AND LIMESTONE SHALL BE APPLIED TO ALL SEEDED AREAS.

THE RATES OF APPLICATION OF FERTILIZER, MULCH AND LIMESTONE SHALL BE AS SPECIFIED IN THE SPECIAL PROVISIONS.

SECTIONS 250 AND 251 OF THE STANDARD SPECIFICATIONS SHALL GOVERN THIS WORK EXCEPT AS SPECIFIED HEREIN OR AS NOTED IN THE SPECIAL PROVISIONS.

DESIGNED -

DRAWN


DATE

CHECKED

REVISIONS REDRAWN 2-15-89 REVISED 8-15-94 REVISED 6-3-99 STD. 9-12 REVISED 3-27-08

ILLINOIS STANDARD

W8-I106



COLORS:

LEGEND AND BORDER- BLACK NON-REFLECTORIZED
BACKGROUND- ORANGE REFLECTORIZED

BACKGROUND- ORANGE REFLECTORIZED

SIGN SIZE	DIMENSIONS								
	Α	В	С	D	E	F	G	Н	
48X48	48.0	24.1	3.0	34.0	33.0	6.0	13.0	3.5	

		SERIE:	S	I			
SIGN		LINES				BLANK STD.	
SIZE	1	2	3	GIN	DER		
48X48	7C	7C	7C	0.8	1.2	B4-48D	

ALL DIMENSIONS IN INCHES

NOTES:

SCALE:

PRIOR TO ALLOWING TRAFFIC ON ANY PORTION OF THE ROADWAY THAT HAS BEEN COLDMILLED, THE CONTRACTOR SHALL HAVE ERECTED "ROUGH GROOVED SURFACE" SIGNS THAT CONFORM TO THE ABOVE DETAILS. A MINIMUM OF ONE SIGN AT EACH END OF THE IMPROVEMENT WILL BE REQUIRED. THE CONTRACTOR SHALL MAINTAIN THE "ROUGH GROOVED SURFACE" SIGNS UNTIL THE COLDMILLED SURFACE IS COVERED WITH LEVELING BINDER OR SURFACE COURSE.


IF AT ANY TIME THE SIGNS ARE IN PLACE BUT NOT APPLICABLE, THEY SHALL BE TURNED FROM THE VIEW OF MOTORISTS OR COVERED AS DIRECTED BY THE ENGINEER.

THE COST OF FURNISHING, ERECTING, MAINTAINING, AND REMOVING THE REQUIRED SIGNS SHALL BE INCLUDED IN THE CONTRACT.

REDRAWN 2-15-89
REVISED 4-6-93
REVISED 3-27-08
REVISED 8-39
REVISED 8-27-08

UNEVEN LANES SIGN

W8-11 (48" × 48")

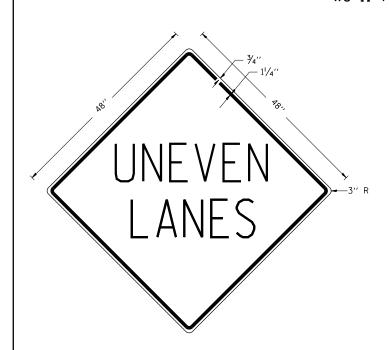

USER NAME = \$USER\$

PLOT DATE = 3/22/2013

'-shtı-detaıls.dan

FILE NAME =

COLORS

REVISED

REVISED

REVISED

REVISED

LEGEND AND BORDER - BLACK NON-REFLECTORIZED BACKGROUND - ORANGE REFLECTORIZED

NOTE: PRIOR TO ALLOWING TRAFFIC ON ANY PORTION OF THE ROADWAY THAT HAS BEEN COLDMILLED OR BEFORE RESURFACING OPERATIONS BEGIN, THE CONTRACTOR SHALL HAVE ERECTED "UNEVEN PAVEMENT" SIGNS THAT CONFORM TO THE ABOVE DETAILS. A MINIMUM OF ONE SIGN AT EACH END OF THE IMPROVEMENT WILL BE REQUIRED. THE CONTRACTOR SHALL MAINTAIN THE "UNEVEN PAVEMENT" SIGNS UNTIL THE RESURFACING OPERATIONS ARE COMPLETED.

IF AT ANY TIME THE SIGNS ARE IN PLACE BUT NOT APPLICABLE, THEY SHALL BE TURNED FROM THE VIEW OF MOTORISTS OR COVERED AS DIRECTED BY THE ENGINEER.

THE COST OF FURNISHING, ERECTING, MAINTAINING, AND REMOVING THE REQUIRED SIGNS SHALL BE INCLUDED IN THE CONTRACT.

STD. 9-41

	DRAWN	2-15-89
	REVISED	4-06-9
	REDSIGNED	7-23-0
1	RESIZED	5-08-0

REVISIONS

STATE OF	ILLINOIS
DEPARTMENT OF	TRANSPORTATION

	F						SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
DISTRICT NINE DETAILS						2882	(11,12)R-1	FRANKLIN	196	69
								CONTRACT	NO.	78317
	SHEET	OF	SHEETS	STA.	TO STA.		ILLINOIS FED. AID PROJECT			