

GENERAL NOTES

All elevations shown on the plans are established from U.S.G.S. mean sea level datum.

Existing structures (Including foundations, walls, cisterns, wells or other underground structures) within the right-of-way shall be removed in accordance with Article 501.04 and 501.05 of the Standard Specifications, without additional compensation, unless otherwise noted in the Plans or Special Provisions.

The Contractor shall seed all disturbed areas within the project limits.

No overhaul has been computed and none shall be paid for from any source.

The final top four inches of soil in any right-of-way area disturbed by the Contractor must be a cohesive soil capable of supporting vegetation complying with Section 211 of the Standard Specification for top soil.

The Contractor shall be responsible for protecting utility property during construction operations as outlined in Article 107.31 of the Standard Specifications.

All utility poles, gas pipes, etc. in the way of the improvements shall be moved by the utilities prior to construction and shall not be included in the contract. The Contractor shall notify the respective utilities to make the necessary adjustments prior to construction.

The location and elevation of the various underground utilities as shown on the plans are not to be taken as exact. The Contractor shall use special care when conducting construction operations near them to prevent damage.

The utilities located within the project limits or immediately adjacent to the project construction limits include:

Frontier Communications	Ameren IP
Attn: Garrett Burt	Attn: Engineering
112 Elm Street	1524 Knox Highway #9
Sycamore, IL 60178	Galesburg, IL 61401
(815) 895-1538	

A minimum of 48 hours advance notice is required for non-emergency work.

A Nationwide 404 Permit has been issued for this project and the conditions of that Permit must be adhered to.

Where section or subsection monuments are encountered, the Engineer shall be notified before such monuments are removed. The Contractor shall protect and carefully preserve all property markers, monuments and right-of-way pins until the Owner, an Authorized Surveyor, or Agent has witnessed or otherwise referenced their location.

Existing mail boxes, street signs and traffic signs that are within the construction limits shall be removed and reset by the Contractor. Cost of removing and resetting to be included in the contract until price bid per Cubic Yard for Earth Excavation (Special).


All borrow/waste/use sites must be approved by the Illinois Department of Transportation prior to removing any material from the project site or initiating any earthmoving activities, including temporary stockpiling outside the limits of construction.

SCHEDULE OF QUANTITIES

EROSION CONTROL BLANKET			
LOCATION	SO. YD.	REMARKS	
LT. STA. 17+00 - 22+50	2,130		
RT. STA. 17+00 - 22+50	1,900		
TOTAL	4,030 SO. YD.		25100630
TEMPORARY EROSION CONTROL SEEDING			
LOCATION	POUND	REMARKS	
LT. STA. 17+00 - 22+50	44	100 LB/ACRE	
RT. STA. 17+00 - 22+50	39	100 LB/ACRE	
TOTAL	83 POUND		28000250
TEMPORARY DITCH CHECKS			
LOCATION	FOOT	REMARKS	
LT. STA. 19+00	12		
RT. STA. 19+00	11		
LT. STA. 21+00	16		
RT. STA. 21+00	11		
LT. STA. 22+00	8		
TOTAL	58 FOOT		28000305
PERIMETER EROSION BARRIER			
LOCATION	FOOT	REMARKS	
LT. STA. 19+58 - 20+28	120		
RT. STA. 19+00 - 20+37	180		
TOTAL	300 FOOT		28000400
AGGREGATE SURFACE COURSE, TYPE A			
LOCATION	TON	REMARKS	
STA. 17+50.00 - 18+16.00	89	12" (TAPER)	
STA. 18+16.00 - 19+60.50	220	12"	
STA. 20+39.50 - 21+70.00	198	12"	
STA. 21+70.00 - 22+50.00	106	12" (TAPER)	
TOTAL	613 TON		40200100
SEEDING, CLASS 3 (SPECIAL)			
LOCATION	ACRE	REMARKS	
LT. STA. 17+00 - 22+50	0.44		
RT. STA. 17+00 - 22+50	0.39		
TOTAL	0.83 ACRE		X2501100

T.R. 46 EARTHWORK TOTALS

LOCATION	EARTH EXCAVATION (SPECIAL) X2020410	EARTH EXCAVATION ADJUSTED FOR SHRINKAGE 25%	EMBANKMENT	CHANNEL EXCAVATION 20300100	CHANNEL EXCAVATION ADJUSTED FOR SHRINKAGE 67.5%	FURNISHED EXCAVATION 20400800
	CU YD	CU YD	CU YD	CU YD	CU YD	CU YD
TOTAL	735	552	638	210	79	7

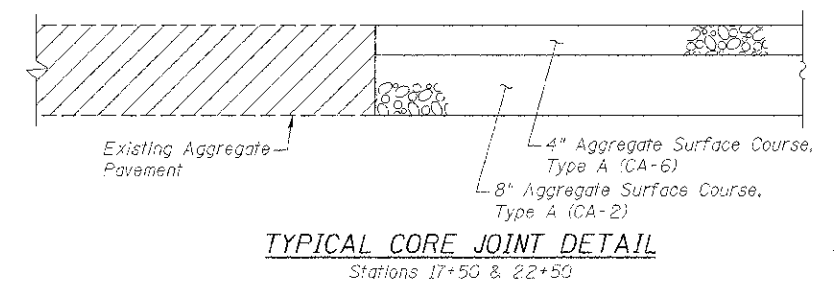

FILE = S:\PROJECTS\0812\1002012\Bureau\1946\DESIGN\STRUCT\0 - 0.rings\1002012\General Notes Schedule of Quantities Detail.rvt



DESIGNED - IPN	REVISED -
CHECKED - BKC	REVISED -
DRAWN - PDL	REVISED -
CHECKED - BKC	REVISED -

BUREAU COUNTY
T.R. 46 (350 E. ST.) OVER W. FORK SPOON RIVER
STATION 20 + 00

GENERAL NOTES, SCHEDULE OF QUANTITIES & DETAIL
STRUCTURE NO. 006-4263

TWP. : 46	SECTION : 11-16103-00-BR	COUNTY : BUREAU	TOTAL SHEETS : 19	SHEET NO. : 3
WPA* 1003012		CONTRACT NO. 87531		
[LINKS] [FEED AID PROJECT] [BROS-00110905]				