


F.A.I. R.T.E.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
55	99 (I&2) WRS	WILL	334	158
STA. TO STA.		ILLINOIS FED. AID PROJECT		
FED. ROAD DIST. NO.				

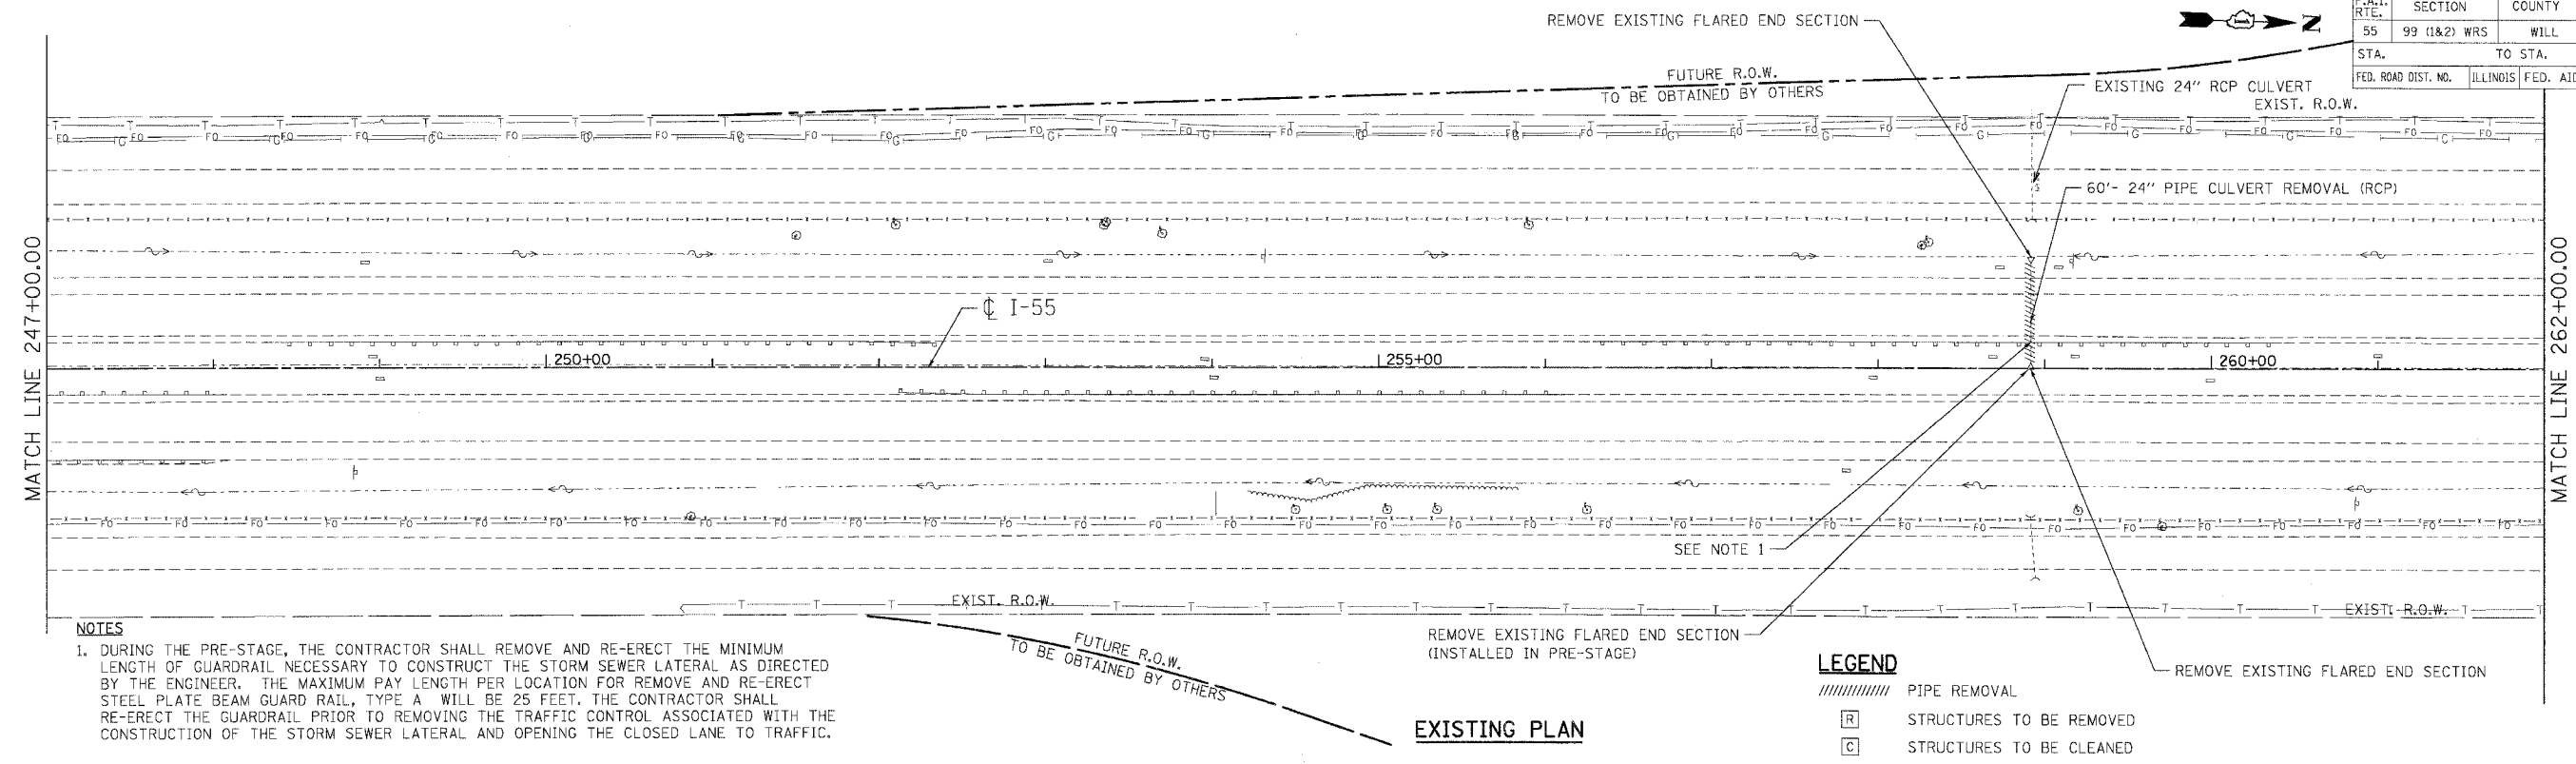


NOTES

1. DURING THE PRE-STAGE, THE CONTRACTOR SHALL REMOVE AND RE-ERECT THE MINIMUM LENGTH OF GUARDRAIL NECESSARY TO CONSTRUCT THE STORM SEWER LATERAL AS DIRECTED BY THE ENGINEER. THE MAXIMUM PAY LENGTH PER LOCATION FOR REMOVE AND RE-ERECT STEEL PLATE BEAM GUARD RAIL, TYPE A WILL BE 25 FEET. THE CONTRACTOR SHALL RE-ERECT THE GUARDRAIL PRIOR TO REMOVING THE TRAFFIC CONTROL ASSOCIATED WITH THE CONSTRUCTION OF THE STORM SEWER LATERAL AND OPENING THE CLOSED LANE TO TRAFFIC.

LEGEND

- ////// PIPE REMOVAL
- [R] STRUCTURES TO BE REMOVED
- [C] STRUCTURES TO BE CLEANED

EXISTING PLAN

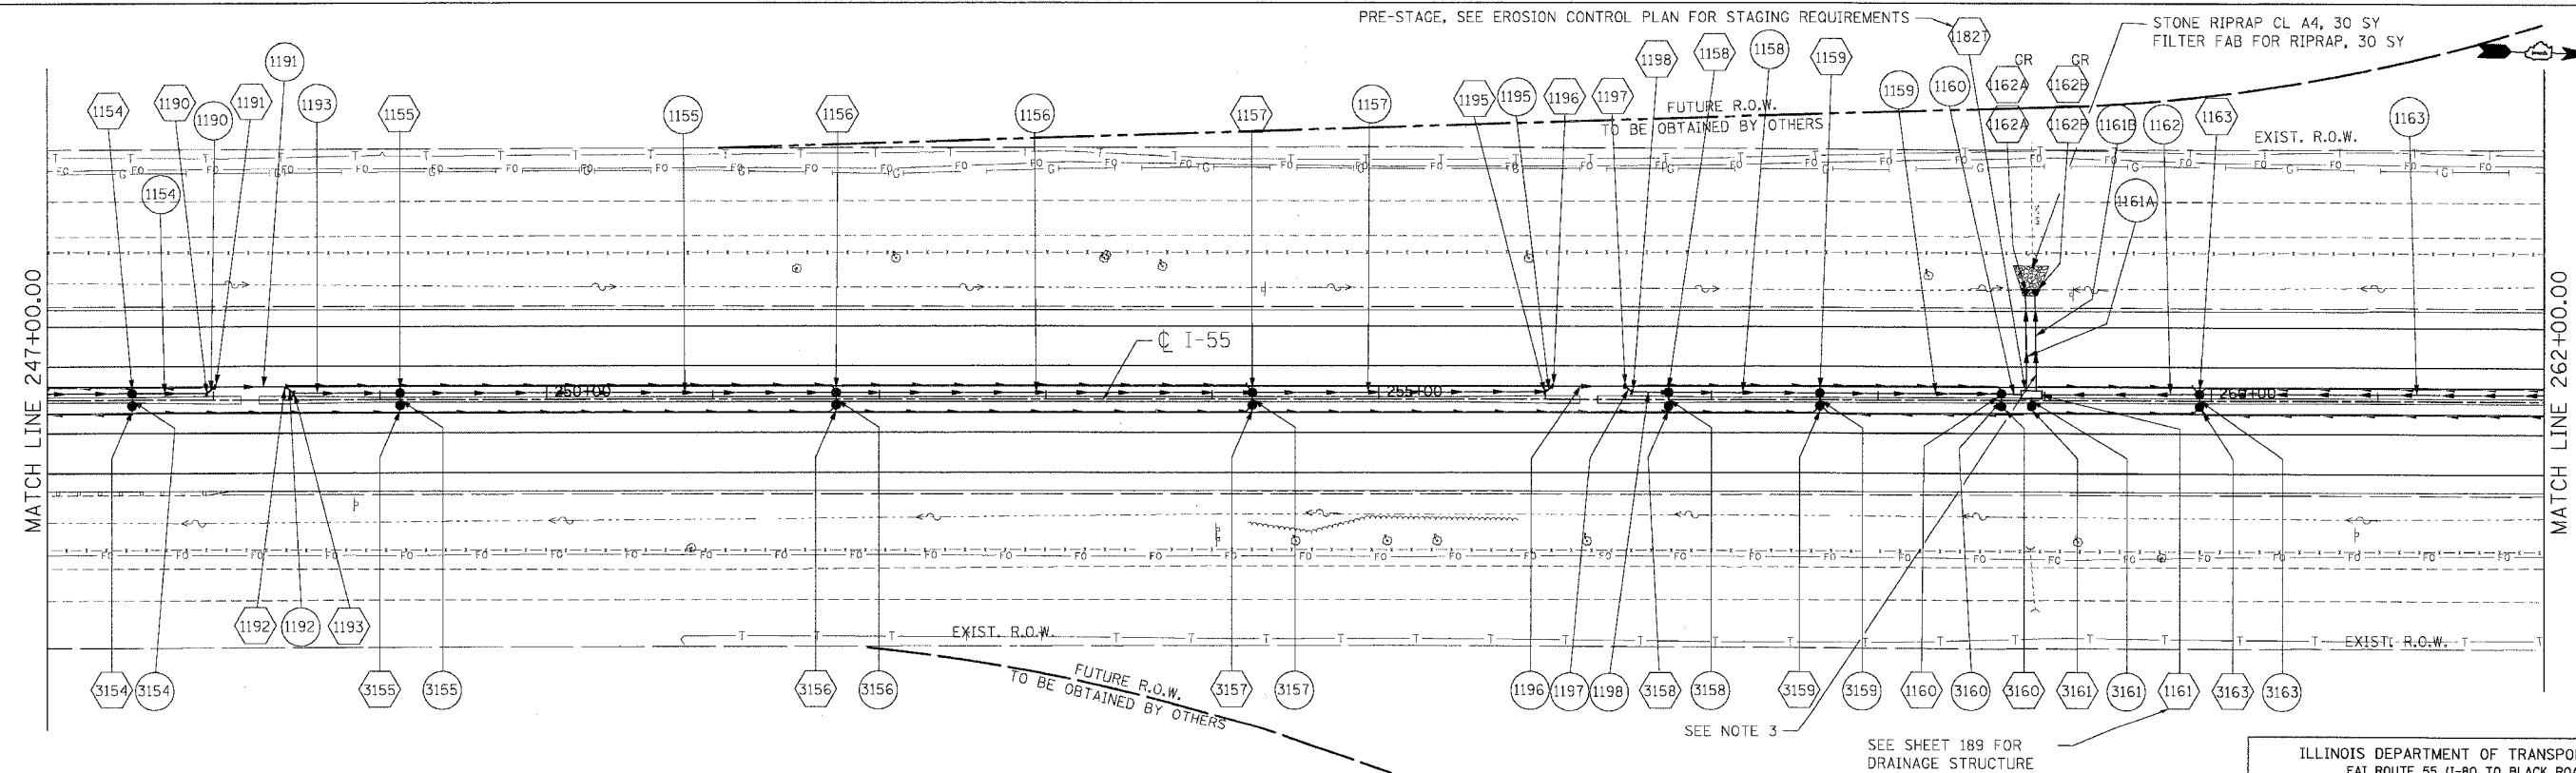

LEGEND

- (100) STRUCTURE NUMBER
- GR GRATING FOR STRUCTURE
- (100) PIPE NUMBER
- STORM SEWER
- CATCH BASIN
- MANHOLE
- ▲ FLARED END SECTION
- HEADWALL
- PIPE UNDERDRAINS

NOTES

1. FOR STRUCTURE AND PIPE INFORMATION SEE DRAINAGE SCHEDULES, SHEETS 169, 170, 171, 172, 173, 174 AND 175.

2. PROPOSED SEWER AND CULVERT CROSSING BENEATH THE EXISTING PAVEMENT SHALL BE CONSTRUCTED DURING PRE-STAGE PER THE STAGING AND TRAFFIC CONTROL PLANS. SEE ROADWAY PLANS FOR PATCHING DETAILS.

3. STORM SEWER LATERALS SHALL BE INSTALLED PER THE STAGING AND TRAFFIC CONTROL TYPICAL SECTIONS FOR PRE-STAGE (SEE SHEET 111). THE CONTRACTOR SHALL BEGIN CONSTRUCTION OF THIS STORM SEWER LATERAL WHEN PRECIPITATION IS NOT INCLUDED IN THE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION'S NATIONAL WEATHER SERVICE FORECAST FOR THE 48 HOUR PERIOD FOLLOWING THE START OF CONSTRUCTION OF THIS STORM SEWER LATERAL ([HTTP://WWW.NWS.NOAA.GOV](http://www.nws.noaa.gov)). PRE-STAGE, PHASE II SHALL BE COMPLETED WITHIN 36 HOURS OF COMPLETING PRE-STAGE, PHASE I FOR THIS STORM SEWER LATERAL.

PROPOSED PLAN

SEE SHEET 189 FOR DRAINAGE STRUCTURE SPECIAL DETAILS

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
 FAI ROUTE 55 (I-90 TO BLACK ROAD)
 WIDENING AND RESURFACING

DRAINAGE AND UTILITY PLAN
 FAI 55
 STA. 247+00.00 TO STA. 262+00.00

SCALE: 1"=50'
 DATE: 03/15/07
 DRAWN BY: MRK
 CHECKED BY: TKL

TENG
 TENG & ASSOCIATES, INC.
 ENGINEERS/ARCHITECTS/PLANNERS
 CHICAGO, ILLINOIS

PLOT DATE = 04/05/07
 FILE NAME = 031507.DWG
 USER NAME = 015518