
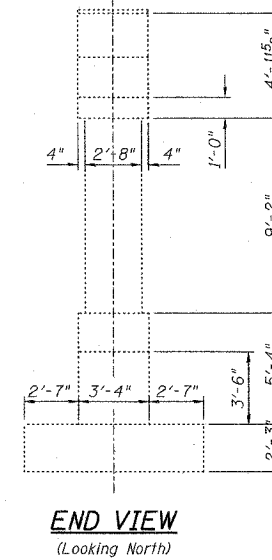
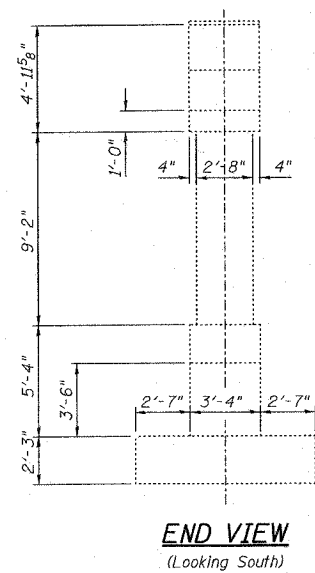
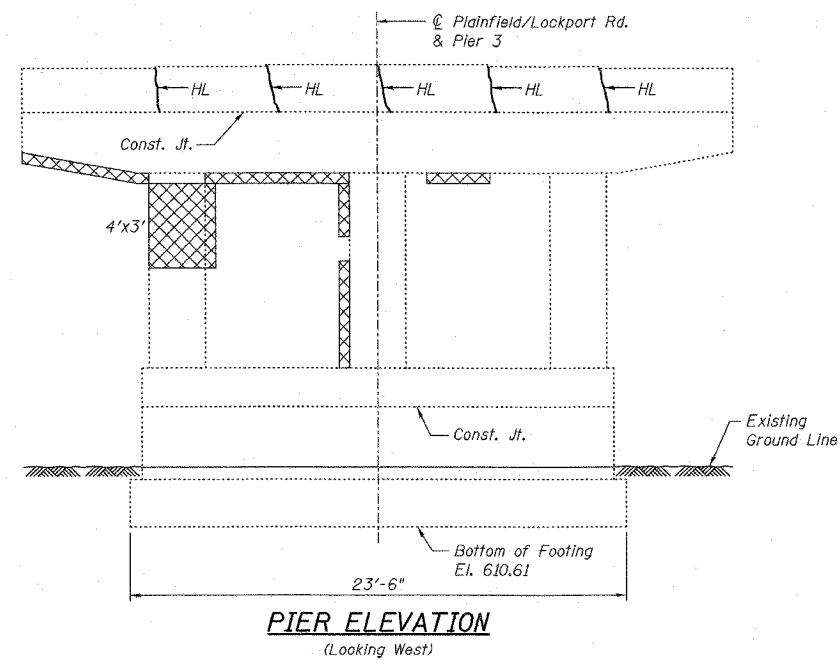
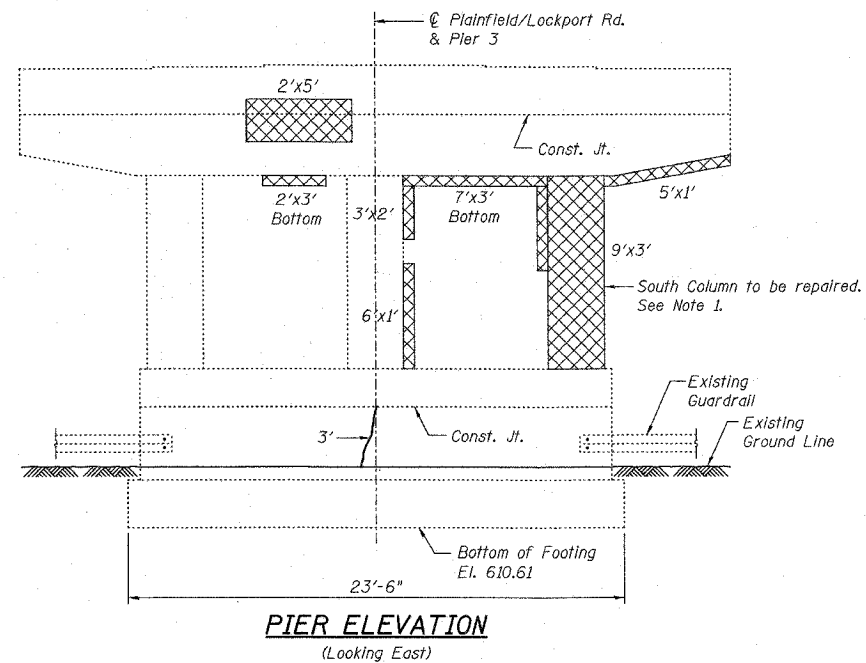
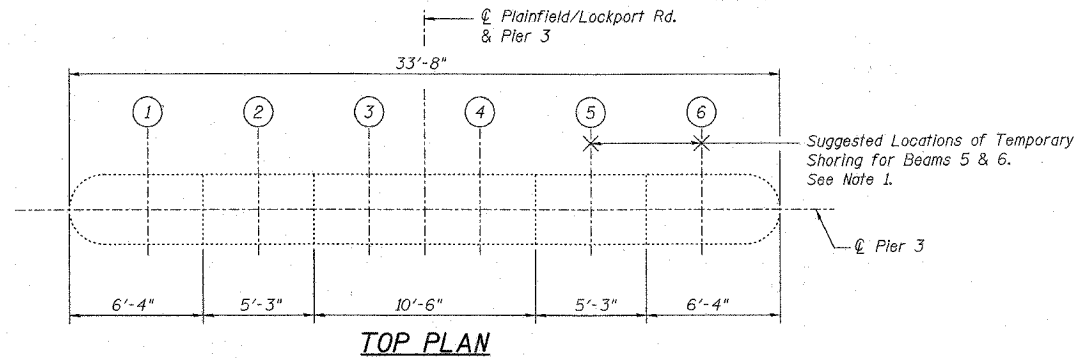


STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	SHEET NO. 5
FAI 55	**	WILL	227	149	5 SHEETS
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT-			

\*\* SECTION 99 (1&2) WRS-1  
CONTRACT NO. 62896



BILL OF MATERIAL

Item	Unit	Total
Structural Repair of Concrete (Depth Equal to or Less Than 5")	Sq. Ft.	93.0
Epoxy Crack Sealing	Foot	3
Temporary Shoring and Cribbing	L.S.	1

LEGEND

- Structural Repair of Concrete (Depth equal to or less than 5")
- Epoxy Crack Sealing
- H.L. Hairline Crack - Not to be sealed

Note:

1. Provide Temporary Shoring to support Beams 5 & 6 during the repair of the south column. See Special Provision for "Temporary Shoring and Cribbing".

DESIGNED	S.CHELBIAN
CHECKED	J.GRAINAWI
DRAWN	D.C.PATEL
CHECKED	J.GRAINAWI

Date: 2/23/2007

PIER 3 REPAIR DETAILS  
PLAINFIELD ROAD OVER I-55  
SECTION 99 (1&2) WRS-1  
WILL COUNTY  
STA. 699+98.09  
STRUCTURE NO. 099-0176

