



Illinois Department of Transportation

2300 South Dirksen Parkway / Springfield, Illinois / 62764

May 23, 2007

SUBJECT: FAS 567 (CH 20)
Project RS-0567(114)
Section 05-00023-04-RS
Mason County
Contract No. 93436
Item 32
June 15, 2007 Letting
Addendum (A)

TO PROSPECTIVE BIDDERS:

Due to clarify information necessary to revise the following:

Proposal / Plans Included – Schedule of Prices, page 1, Summary of Quantities, HMA Requirements, sheet 5 and Typical Sections, sheet 6.

Prime contractors must utilize the enclosed material when preparing their bid and must include any Schedule of Prices changes in their bidding proposal.

Bidders using computer-generated bids are cautioned to reflect any and all Schedule of Prices changes, if involved, into their computer programs.

Very truly yours,

Eric Harm
Interim Engineer of Design and Environment

A handwritten signature in cursive script, reading "Ted B. Walschleger" followed by "P.E." in a smaller font.

By: Ted B. Walschleger
Engineer of Project Development
and Implementation

COUNTY NAME	CODE	DIST	SECTION NUMBER	PROJECT NUMBER	ROUTE
MASON	125	06	05-00023-04-RS	RS-0567/114/000	FAS 567

ITEM NUMBER	PAY ITEM DESCRIPTION	UNIT OF MEASURE	QUANTITY	UNIT PRICE		TOTAL PRICE	
				DOLLARS	CENTS	DOLLARS	CTS
40600100	BIT MATLS PR CT	GALLON	5,334.000 X	=			
40600300	AGG PR CT	TON	114.000 X	=			
40600982	HMA SURF REM BUTT JT	SQ YD	294.000 X	=			
40600990	TEMPORARY RAMP	SQ YD	48.000 X	=			
40603510	P HMA SC "C" N50	TON	6,500.000 X	=			
48101200	AGGREGATE SHLDS B	TON	2,550.000 X	=			
67100100	MOBILIZATION	L SUM	1.000 X	=			
70103700	TRAF CONT COMPL	L SUM	1.000 X	=			
70300100	SHORT-TERM PAVT MKING	FOOT	6,108.000 X	=			
70300200	TEMP PAVT MARKING	FOOT	75,499.000 X	=			
78001120	PAINT PVT MK LINE 5	FOOT	75,499.000 X	=			
78100100	RAISED REFL PAVT MKR	EACH	413.000 X	=			

TOTAL \$

NOTE:
 *** PLEASE TURN PAGE FOR IMPORTANT NOTES ***

Revised 5-23-07

SUMMARY OF QUANTITIES			
ITEM NO.	ITEM	UNIT	TOTAL
	<i>Polymerized</i>		
40603510	Hot-Mix Asphalt Surface Course Mix "C", N-50	Ton	6500
40600100*	Bituminous Material (Prime Coat)	Gal	5334
40600300*	Aggregate (Prime Coat)	Ton	114
40600982	Hot-Mix Asphalt Surface Removal-Butt Joint	Sq. Yd.	294
40600990	Temporary Ramp	Sq. Yd.	48
48101200	Aggregate Shoulders, Type B	Ton	2550
67100100	Mobilization	Lump Sum	1
70103700*	Traffic Control Complete	Lump Sum	1
70300100#	Short-Term Pavement Marking	Ft.	6108
70300200	Temporary Pavement Marking	Ft.	75,499
△ 78001120	Paint Pavement Marking-Line 5"	Ft.	75,499
△ 78100100	Raised Reflective Pavement Markers	Each	413

Construction Type Code: 1000

* See Special Provisions

Includes Removal

△ Specialty Items

HOT-MIX ASPHALT REQUIREMENTS


Item	Aggregate Composition	Asphalt Grade	Voids
HMA Surface Course	IL-9.5 or 12.5 Mix "C"	SBS PG 70-22	4.0% @ N50

Polymerized

> Hot-Mix Asphalt quantities based on 112 lb./sq. yd./inch


Revised 5-23-07

TYPICAL SECTIONS

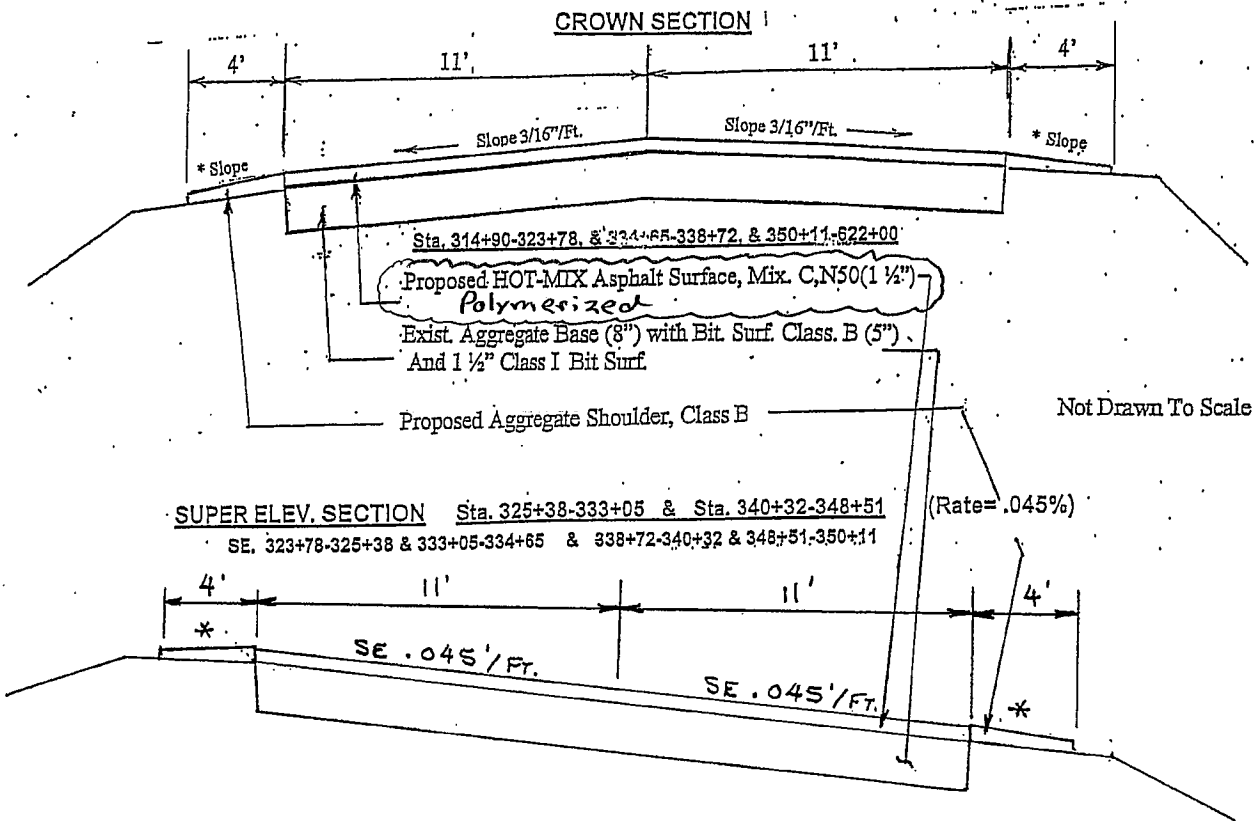

* Roll-over Factor Shall Not Exceed 10%

BUTT JOINT DETAIL

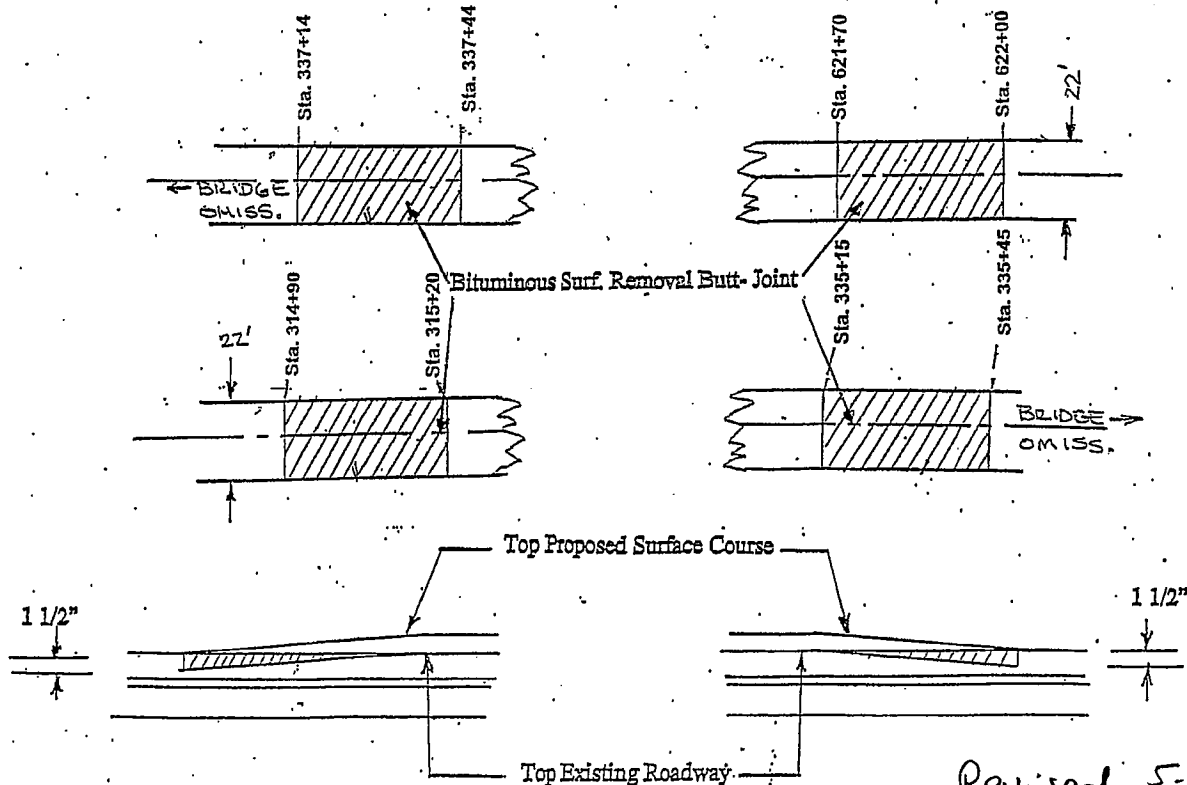

Revised 5-23-07