


STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

F.A.P. NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
95	7B-1	EFFINGHAM	409	361
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT		

CONTRACT NO. 94356

SHEET NO. 16  
SHEETS 18

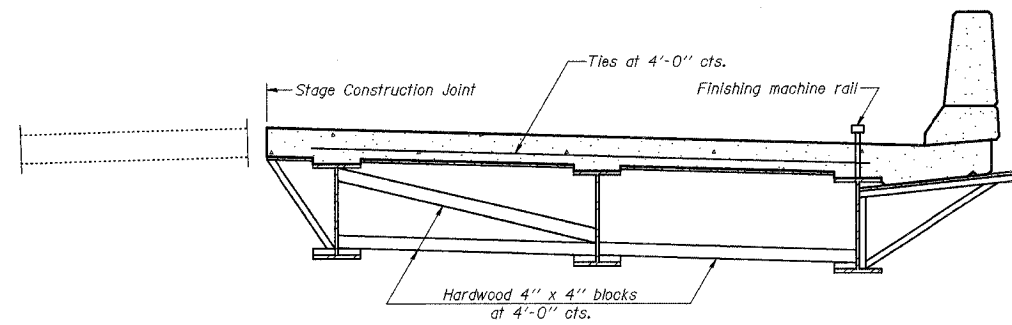


**FORM BRACES FOR  
STAGE CONSTRUCTION**

When cantilever forming brackets are used, the work shall be done according to Article 503.06, except as modified below and in the details shown on this sheet.

The finishing machine rails shall be placed on the top flange of the exterior beams.

The beams or girders, supporting cantilever forming brackets, shall be tied together at 4 foot intervals.

For Standard construction, or Stage Construction the Hardwood bracing materials shall be placed as shown between webs of beams in each bay.

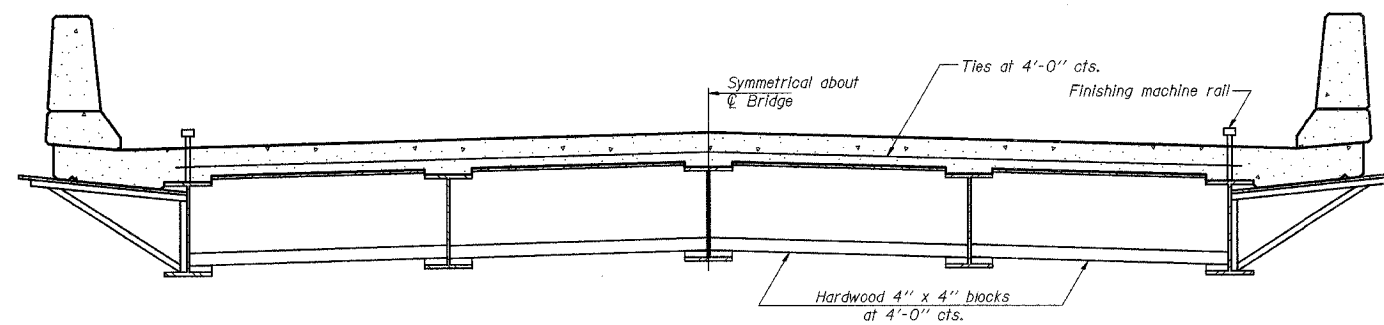

**FORM BRACES FOR  
STANDARD CONSTRUCTION**

SB-1 9-01-03

ILLINOIS DEPARTMENT OF TRANSPORTATION  
CANTILEVER FORMING BRACKETS  
ILLINOIS ROUTE 33 OVER  
BIG SALT CREEK  
F.A.P. ROUTE 95  
SECTION 7B-1  
EFFINGHAM COUNTY  
STA. 146+62.50  
STRUCTURE NUMBER 025-0101

DATE: OCT. 2003

DRAWN BY: NJV  
CHECKED BY: PBB/SJK