


ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FAS 931	99-00038-01-RS	JOHNSON	5	5
PROJECT NO. RS-931 (108)			CONTRACT NO. 99279	

SCHEDULE OF SIGNS				
Location	Name	Signs		Post Length
		No.	Sq. Ft.	
Sta. 5+00 Rt.	CURVE	W1-2L	6.25	16.5
	ADVISORY SPEED	W13-1(45)	2.25	-
Sta. 17+25 Lt.	CURVE	W1-2R	6.25	16.5
	ADVISORY SPEED	W13-1(45)	2.25	-
Sta. 18+00 Rt.	HILL	W7-1	6.25	16.0
Sta. 23+00 Rt.	REVERSE CURVE	W1-4R	6.25	16.5
	ADVISORY SPEED	W13-1(45)	2.25	-
Sta. 44+60 Lt.	REVERSE CURVE	W1-4R	6.25	16.5
	ADVISORY SPEED	W13-1(45)	2.25	-
Sta. 58+25 Rt.	CURVE	W1-2L	6.25	16.0
Sta. 67+70 Lt.	CURVE	W1-2R	6.25	16.0
Sta. 69+80 Rt.	CURVE	W1-2R	6.25	16.0
Sta. 83+40 Lt.	CURVE	W1-2L	6.25	16.0
Sta. 87+00 Lt.	HILL	W7-1	6.25	16.0
Sta. 96+00 Rt.	CURVE	W1-2L	6.25	16.0
Sta. 112+00 Lt.	CURVE	W1-2R	6.25	16.0
Sta. 133+00 Rt.	HILL	W7-1	6.25	16.0
Sta. 134+10 Rt.	SIDE ROAD 90°	W2-2	6.25	16.0
Sta. 135+90 Rt.	CURVE	W1-2L	6.25	16.5
	ADVISORY SPEED	W13-1(45)	2.25	-
Sta. 146+10 Lt.	SIDE ROAD 90°	W2-2	6.25	16.0
Sta. 148+10 Lt.	CURVE	W1-2R	6.25	16.5
	ADVISORY SPEED	W13-1(45)	2.25	-
Various (14)*	NO PASSING	W14-3	77.70	448.0
TOTALS			197.45	723.0

\* See Schedule of "No Passing Zones" for sign locations. Each location shall have one sign of 5.55 Sq. Ft. and two posts with a combined length of 32.0 Ft. Quantities shown are totals.

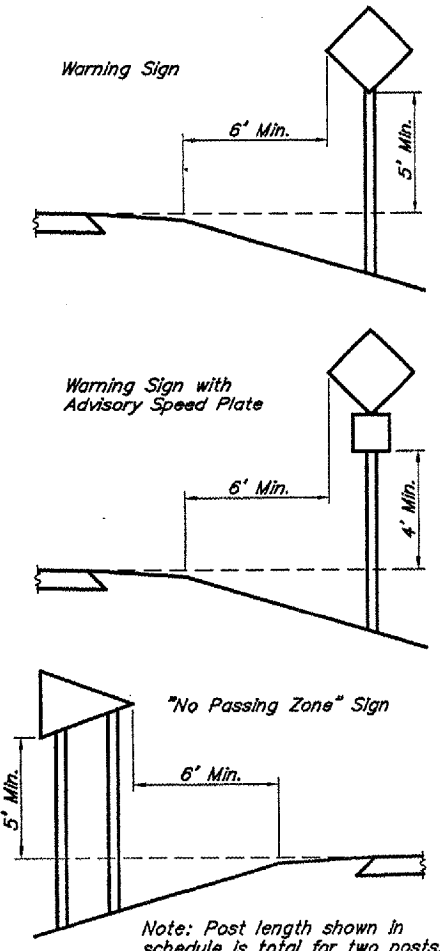

Note: Post length shown in schedule is total for two posts.


**SIGN SCHEDULE & MOUNTING DETAIL**

SCHEDULE OF PAVEMENT MARKING LINE 4" (LIN. FT.)			
Location	Centerline (Yellow Dashed)	Edge Line (White Solid)	No Passing (Yellow-Solid)
Sta. 0+00 to Sta. 165+00	3,000	32,800	17,900

See schedule for limits of "No Passing Zones".  
See Standard 78001 for typical pavement markings.


SCHEDULE OF "NO PASSING ZONES"			
WEST BOUND LANE		EAST BOUND LANE	
Location	Length	Location	Length
Sta. 3+00' to Sta. 11+50'	850'	Sta. 0+00 to Sta. 19+50'	1,950'
Sta. 16+50' to Sta. 38+00'	2,150'	Sta. 24+50 to Sta. 46+00'	2,150'
Sta. 57+00' to Sta. 61+00'	400'	Sta. 65+00 to Sta. 69+00'	400'
Sta. 68+00' to Sta. 79+50'	1,150'	Sta. 75+00 to Sta. 87+50'	1,250'
Sta. 95+00' to Sta. 105+00'	1,000'	Sta. 103+00 to Sta. 113+00'	1,000'
Sta. 114+00' to Sta. 121+50'	750'	Sta. 122+00 to Sta. 129+50'	750'
Sta. 131+00' to Sta. 151+50'	2,050'	Sta. 139+00 to Sta. 159+50'	2,050'
TOTALS		9,550'	

<sup>1</sup> Denotes location of "No Passing Zone" signs to be erected in accordance with Sign Schedule & Mounting Detail.

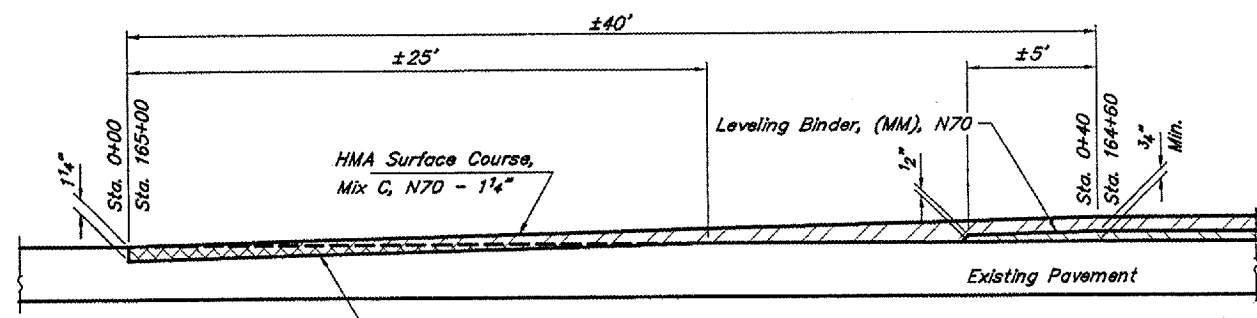

**BEGINNING & ENDING BUTT JOINT**

NOTE: Exist. surface to be primed with Bit. Mat'ls (Pr. Ct.) at 0.10 gal./s.y. & Aggregate (Pr. Ct.) at 3 lbs./s.y.

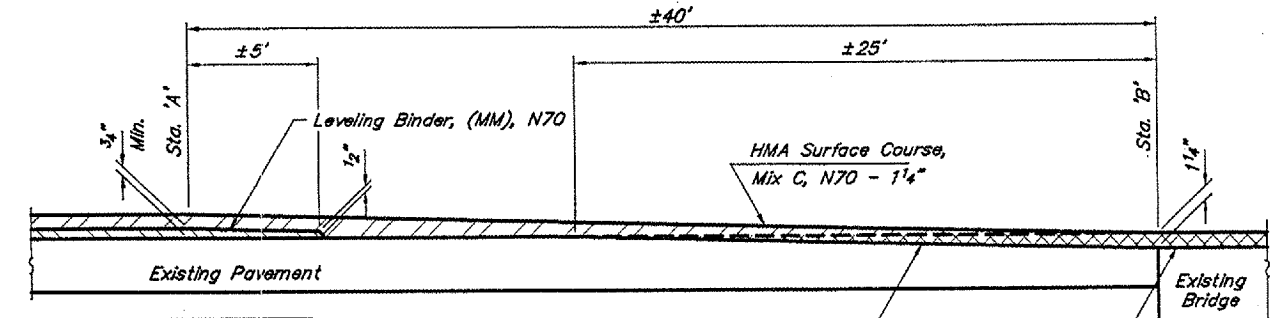

**BRIDGE PAVING DETAIL**

NOTE: Exist. surface to be primed with Bit. Mat'ls (Pr. Ct.) at 0.10 gal./s.y. & Aggregate (Pr. Ct.) at 3 lbs./s.y.

Sta. 'A'	Sta. 'B'
47+06	47+46
49+14	48+74
61+42	61+82
62+92	62+52