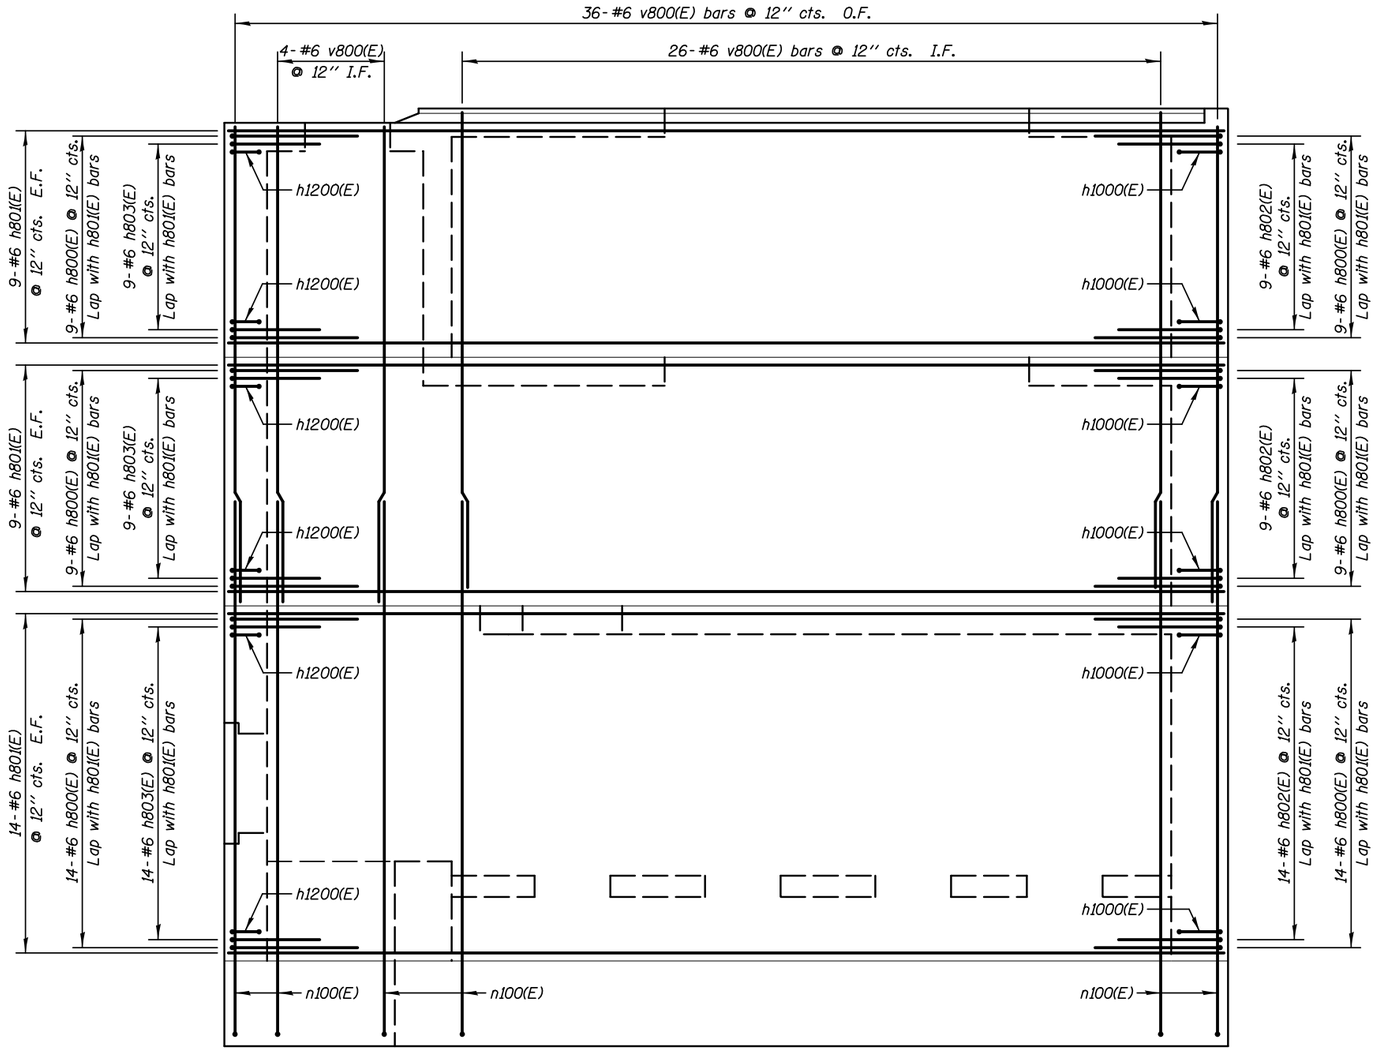

ELEVATION 3

BILL OF MATERIAL

BAR	NO.	SIZE	LENGTH	SHAPE
h800(E)	64	#6	10'-6"	
h801(E)	64	#6	35'-0"	
h802(E)	32	#6	5'-6"	
h803(E)	32	#6	4'-10"	
v800(E)	66	#6	16'-9"	
Reinforcement Bars, Epoxy Coated			LB	6530

Work this sheet with sheet SA-32.



BAR h800(E)



BARS h802(E) & h803(E)

KNIGHT
Engineers & Architects

	DESIGNED - WPM	REVISED -	
	CHECKED - TB	REVISED -	
SCALE - NONE	DRAWN - TB	REVISED -	
DATE - 3/22/2012	CHECKED - WPM	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

REINFORCEMENT DETAILS – ELEVATIONS
PUMP STATION 47
SHEET NO. SA-27 OF 34 SHEETS

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
338/IL 59	2011-035-I	DUPAGE	181	102
		CONTRACT NO. 60P41		
	ILLINOIS FED. AID PROJECT			