

**CONSTRUCTION NOTES:**

- Maintain 8' Minimum Depth (top of Pipe) Below G.L. →
- Abandon Pipe Will Be Grouted
- Begin Transition from 8' Minimum Depth to 5' Minimum Depth (top of Pipe) Below G.L.
- Sta. 36+46 - Remove 25' of old main on each side of the Centerline of Culvert #2
- Sta. 41+50 - Maintain 5' Minimum Depth (top of Pipe) Below G.L. →

**LEGEND:**


UIUC 8" GAS LINE	
GROUND LEVEL DEPTH (Surface)	
PROPOSED GAS LINE (Top of Pipe)	

**MATERIALS:**

MKT NO.	QTY.	DESCRIPTION
1	1200'	8" Steel Pipe - 8.625" O.D., 250 wall, API 5L, Grade B Fusion Bonded Epoxy Coated
1	1	8" Steel Valve

**MATERIALS:**

MKT NO.	QTY.	DESCRIPTION

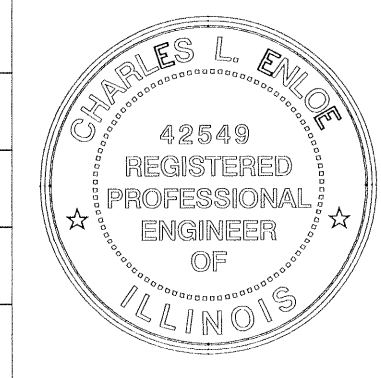

**Revisions**

19-Oct-05	SDP
23-Nov-05	SDP

Utility Safety & Design, Inc.  
 #9 Executive Woods Court Suite 1  
 Belleville, Illinois

Relocate UI Lateral  
 Natural Gas Pipeline for  
 Phase 2 of Curtis Road Improvements  
 Station 32+00 to Station 44+00 | U4

Scale: 1" = 40'