
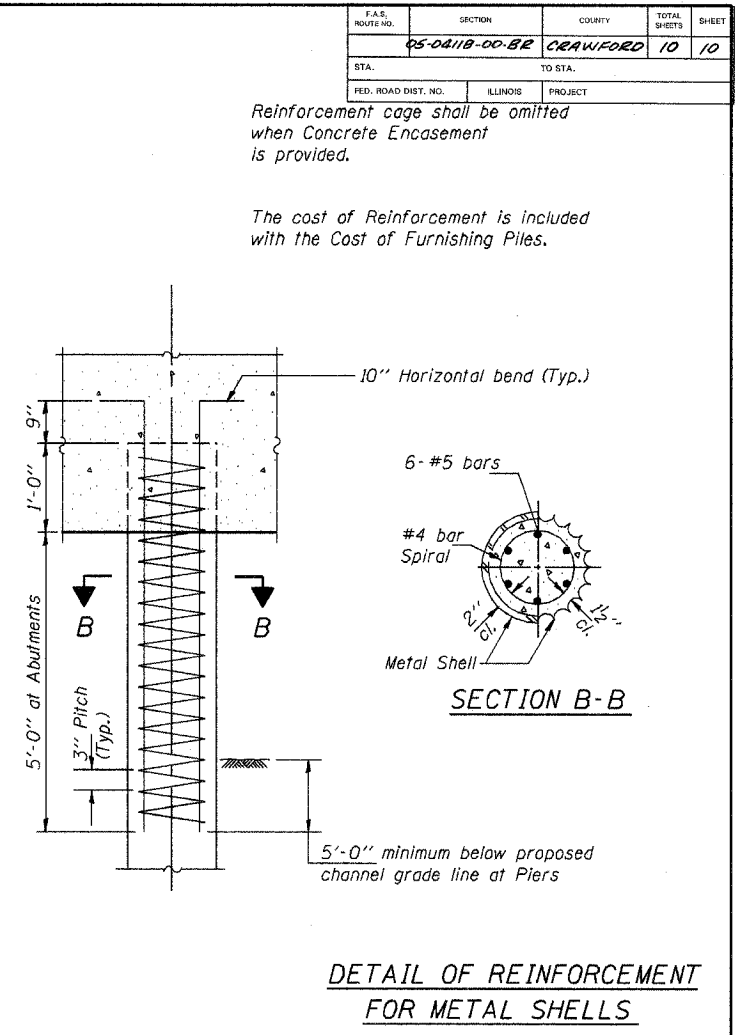
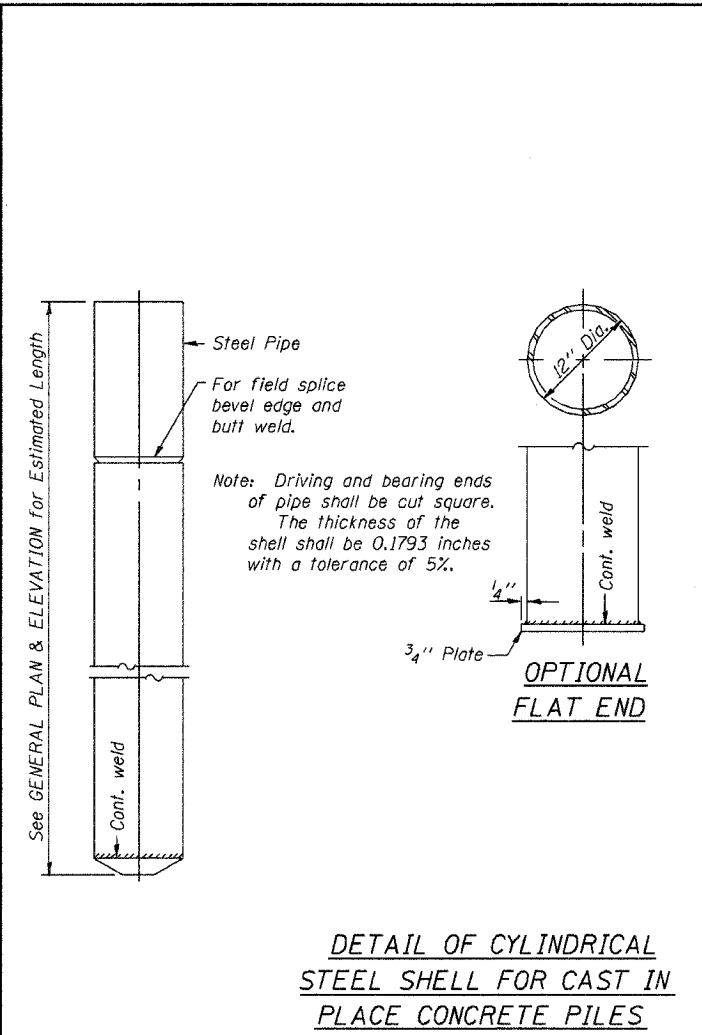
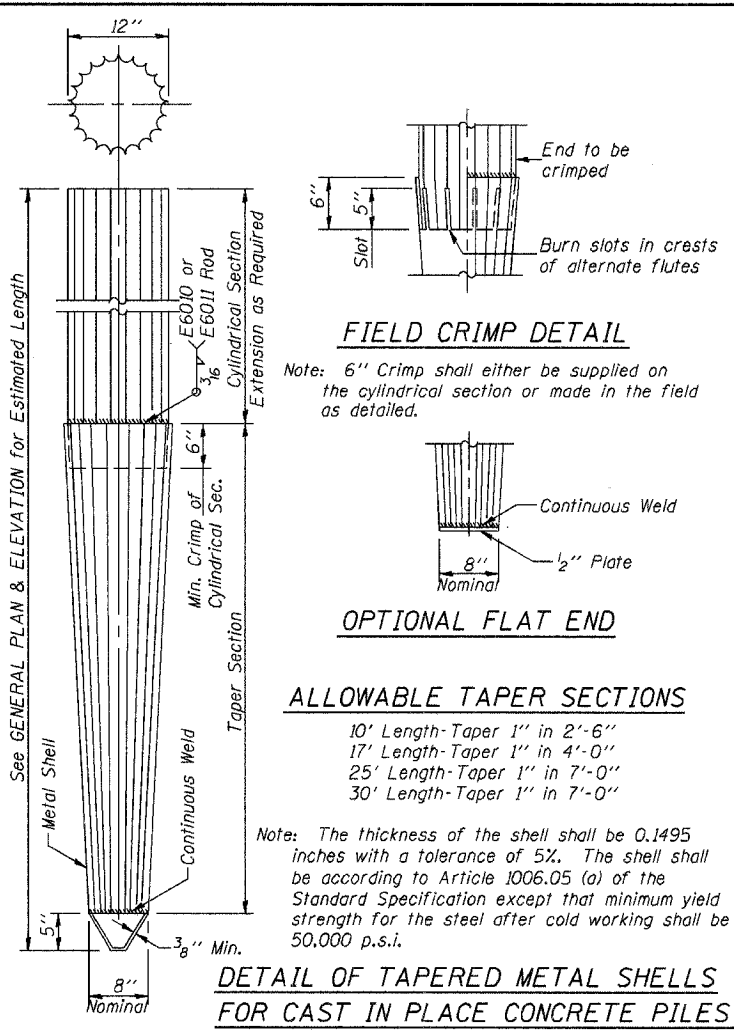


F.A.S. ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET
95-04118-00-BE	CRAWFORD	10	10	
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	PROJECT		

Reinforcement cage shall be omitted when Concrete Encasement is provided.

The cost of Reinforcement is included with the Cost of Furnishing Piles.


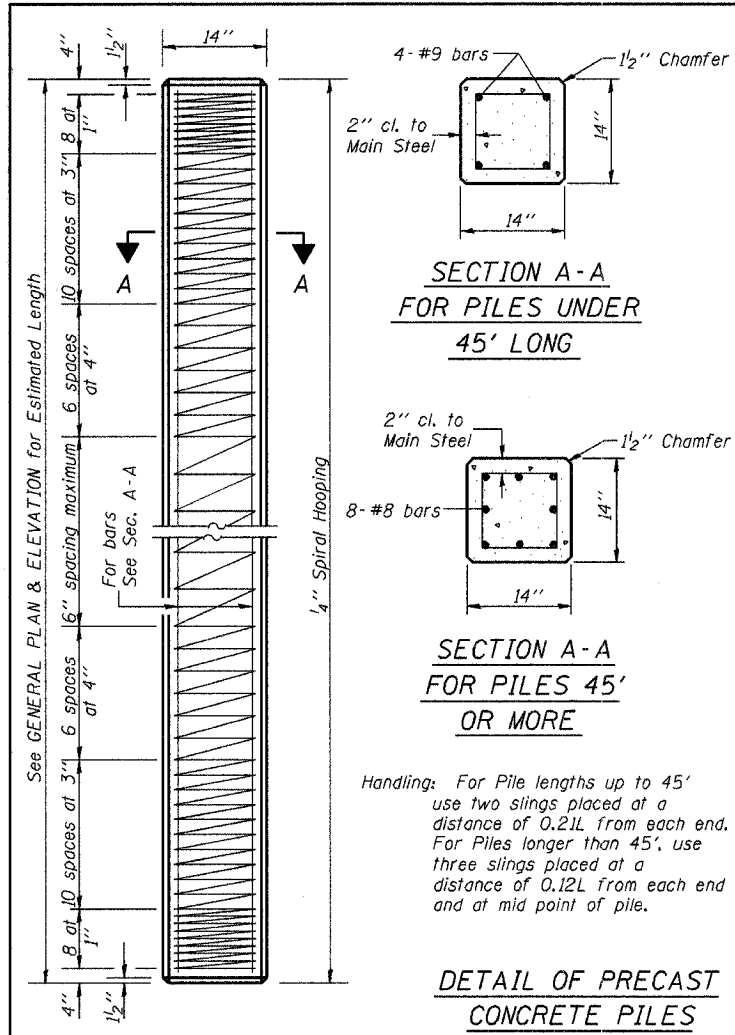


Illinois Department of Transportation

PASSED FEBRUARY 1, 2000
 Thomas J. Demagallari
 Engineer of Bridge Design

APPROVED FEBRUARY 1, 2000
 Ralph E. Anderson
 Engineer of Bridges and Structures

186-F-1 03/95

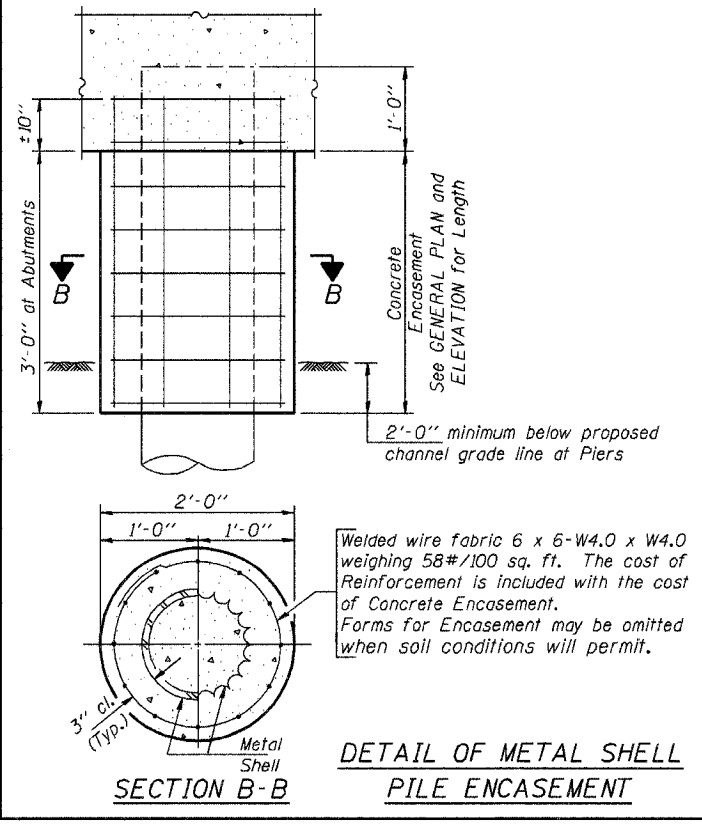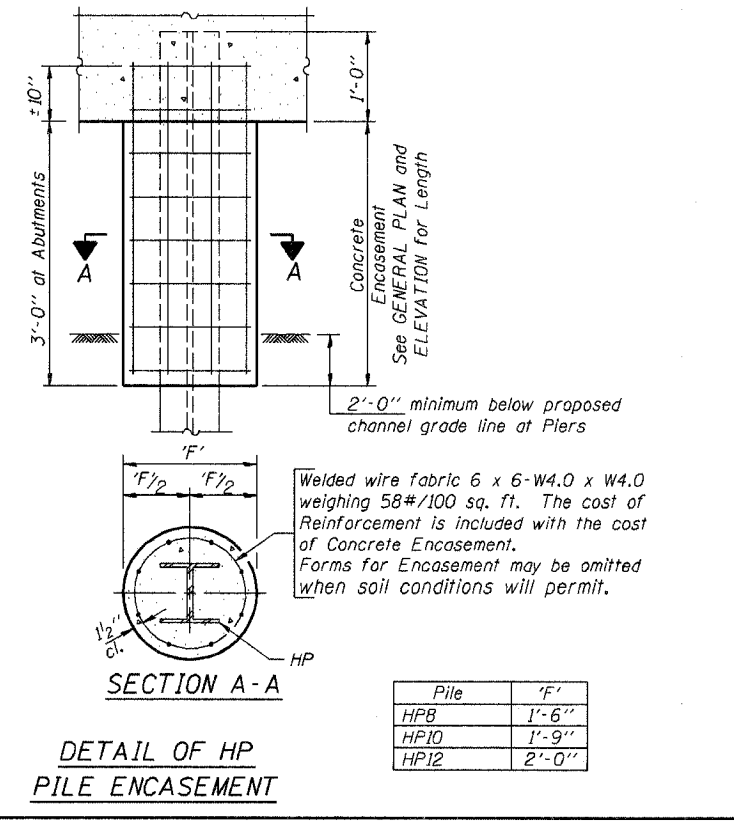

QUANTITIES/FT. OF ENCASEMENT (STEEL PILES)

Pile Size	Item	Quantity
HP8	Concrete Encasement	0.063 C.Y.
HP10	Concrete Encasement	0.086 C.Y.
HP12	Concrete Encasement	0.112 C.Y.

(METAL SHELL PILES)

Pile Size	Item	Quantity
12" Dia.	Concrete Encasement	0.087 C.Y.

PILE DETAILS

STANDARD CX-1