F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1587	2004-042 RS	COOK	25	24

STA.		TO STA.		

FED. ROAD DIST. NO. 1 | ILLINOIS | FED. AID PROJECT

62677

1700 (68″)

175 (7″)   1350 (54″)   175 (7″)

①

175 | 125 | 175 | 175
(7″)(5″)(7″)(7″)

1125 (45″)

ROAD WORK

AHEAD

EXPECT DELAYS

1″ BLACK BORDER

2.1 m MIN. (7′)

USE APPROPRIATE
MONTH AND DATE
FOR CONTRACT

②

275 (11″) BEGINS XXX XX

1450 (58″)
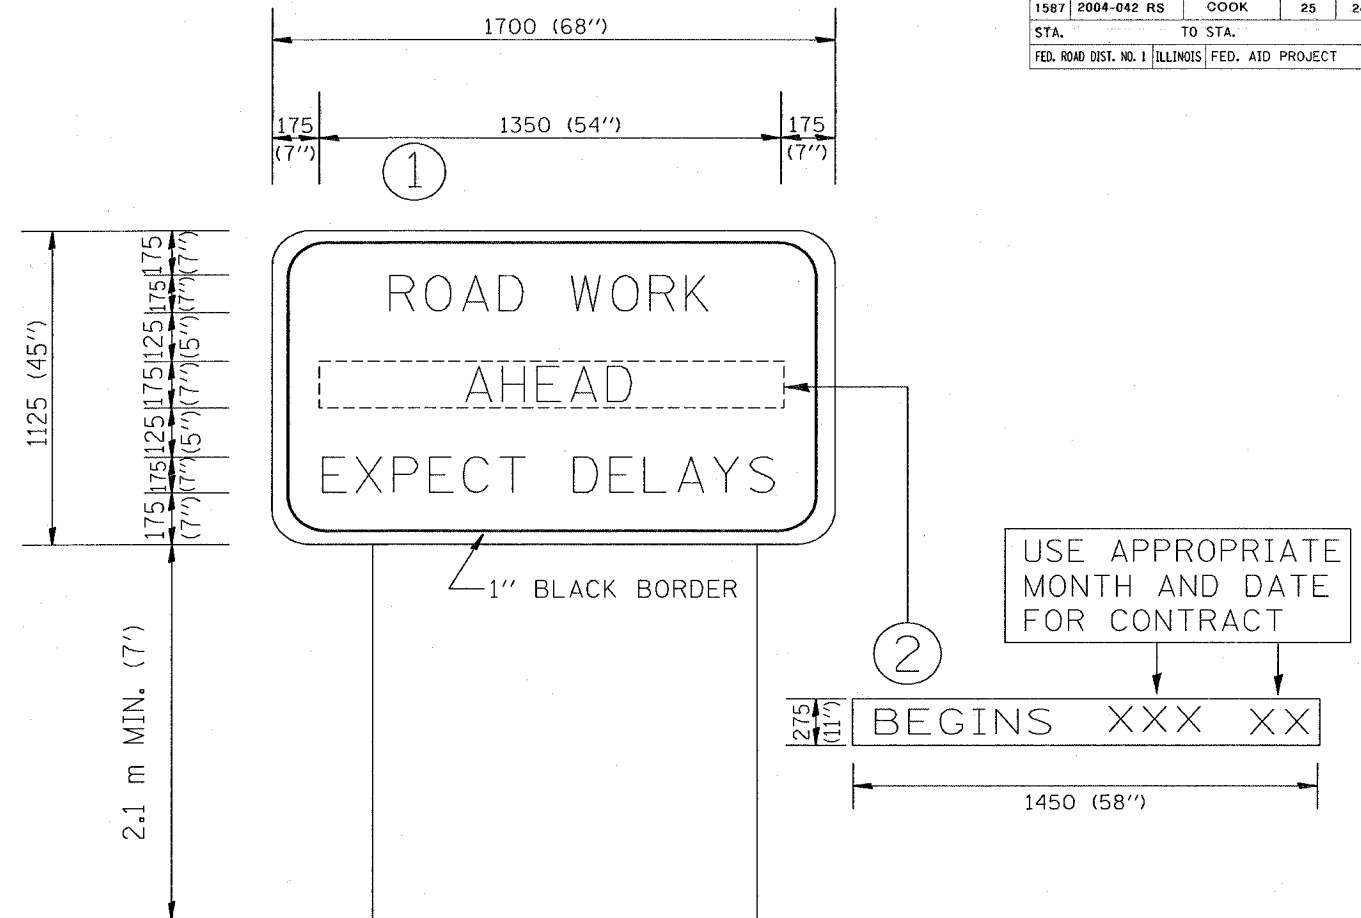
NOTES:

1. USE BLACK LETTERING ON ORANGE BACKGROUND.
2. ERECT SIGNS IN ADVANCE OF THE LOCATION FOR THE "ROAD CONSTRUCTION AHEAD" SIGN AT LOCATIONS AS DIRECTED BY THE ENGINEER.
3. ERECT SIGN ① WITH INSTALLED PANEL ② ONE WEEK PRIOR TO THE START OF CONSTRUCTION.
4. REMOVE PANEL ② SOON AFTER THE START OF CONSTRUCTION.
5. SEE SPECIAL PROVISION FOR "TEMPORARY INFORMATION SIGNING" FOR ADDITIONAL INFORMATION.
6. ONE SIGN ASSEMBLY EQUALS 2.3 SQ. M. (25.70 SQ. FT.)

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES)
UNLESS OTHERWISE SHOWN.

REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION
NAME	DATE	
R. MIRS	9-15-97	
R. MIRS	12-11-97	TEMPORARY INFORMATION SIGNING
T. RAMMACHER	2-2-99	
		SCALE:
		DATE 3/9/2005

DRAWN BY: BUR. OF DESIGN
CHECKED BY

TC22
REVISION DATE: 02/02/99