


FBI RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80/94	0203.1B	COOK	200	6
STA.		TO STA.		
FED ROAD DIST. NO.		ILLINOIS FED. AID PROJECT		

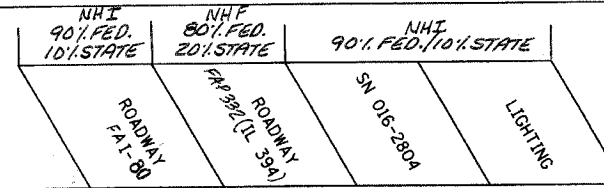

CODE	PAY ITEM	UNIT	URBAN TOTAL	CONSTRUCTION TYPE CODE			
				J000-2A	J000-2A	X971-2A	Y030-1E
M5428515	PIPE CULVERTS, TYPE 5 RCCP 450MM	METER	119.5	119.5			
M542E120	PRECAST REINFORCED CONCRETE FLARED END SECTIONS 450MM	EACH	1	1			
M5503070	STORM SEWERS, TYPE 2, REINFORCED CONCRETE CUVERT, STORM DRAIN, AND SEWER PIPE, CLASS III, 450MM	METER	18.5	18.5			
M5870020	BRIDGE SEAT SEALER	SQ M	57.9			57.9	
M6010610	PIPE UNDERDRAINS 150MM	METER	178.5	178.5			
M6010710	PIPE UNDERDRAINS 150MM (SPECIAL)	METER	32.0	32.0			
M6020105	CATCH BASINS, TYPE A, 1.2M DIAMETER, TYPE 1 FRAME, OPEN LID	EACH	1	1			
M6020140	CATCH BASINS, TYPE A, 1.2M DIAMETER, TYPE 8 GRATE	EACH	1	1			
M6063620	CONCRETE MEDIAN SURFACE, 150MM	SQ M	31	31			
M6300100	STEEL PLATE BEAM GUARD RAIL, TYPE A	METER	11.43	11.43			
M6320030	GUARDRAIL REMOVAL	METER	17		17		
M6370805	CONCRETE BARRIER TRANSITION	METER	6	6			
M6371050	CONCRETE BARRIER BASE	METER	110	110			
M7040210	RELOCATE TEMPORARY CONCRETE BARRIER (SPECIAL)	METER	33.55		33.55		
M7802010	POLYUREA PAVEMENT MARKING TYPE I - LINE 100MM	METER	1136		1136		
M7802030	POLYUREA PAVEMENT MARKING TYPE I - LINE 300MM	METER	23		23		
M8120210	CONDUIT EMBEDDED IN STRUCTURE, 25MM DIA. PVC	METER	11				11
M8120230	CONDUIT EMBEDDED IN STRUCTURE, 50MM DIA. PVC	METER	2293				2293
M8131400	JUNCTION BOX, NON-METALLIC, EMBEDDED IN STRUCTURE, 525MM X 275MM X 200MM	EACH	40				40
MX030256	ERECTING FLOATING BEARINGS, GUIDED EXPANSION 1000KN	EACH	6			6	
MX030257	ERECTING FLOATING BEARINGS, GUIDED EXPANSION 1250KN	EACH	12			12	
MX032055	WEED CONTROL, TEASEL	METER	1	1			
MX033290	SEDIMENT CONTROL, SILT FENCE	METER	630	510	120		
MX033291	SEDIMENT CONTROL, SILT FENCE MAINTENANCE	METER	630	510	120		
MX033292	SEDIMENT CONTROL, STABILIZED CONSTRUCTION ENTRANCE	SQ M	900		900		
MX033303	SEDIMENT CONTROL, STABILIZED CONSTRUCTION ENTRANCE MAINTENANCE	SQ M	900		900		
MX033467	WICK DRAINS	METER	8472		8472		
MX033493	TEMPORARY SOIL RETENTION SYSTEM (REMAIN IN PLACE)	SQ M	607		607		
MX637150	CONCRETE BARRIER, SINGLE FACE, 1065 MM HEIGHT, SPECIAL	METER	104	104			
MX704012	TEMPORARY CONCRETE BARRIER (INSTALL ONLY)	METER	42.7		42.7		
MZ001050	AGGREGATE SUBGRADE 300MM	SQ M	1698	1698			
MZ065755	SLOTTED DRAIN 300MM WITH VARIABLE SLOT HEIGHT	METER	70	70			
X0323426	SEDIMENT CONTROL, DRAINAGE STRUCTURE INLET FILTER CLEANING	EACH	15	15			

- SPECIALTY ITEM
- SFTY-3N
- △ Y080

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
I-80/94 WB FLYOVER RAMP
TO SB IL 394 (RAMP G)

SUMMARY OF QUANTITIES

HORIZ SCALE: NONE
VERT SCALE: NONE
DATE: MARCH 23, 2005

DRAWN BY: BJM
CHECKED BY: JES

HNTB