



MAP ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO
664	#	SANGAMON	61	51
STA.		TO STA.		

D-6 RESURFACING 2005-1
CONTRACT NO. 72790

PLAN	SURVEYED	DATE
NOTE BOOK	ALIGNED	
NO.	RT. OF WAY CHECKED	
	FILE NAME	

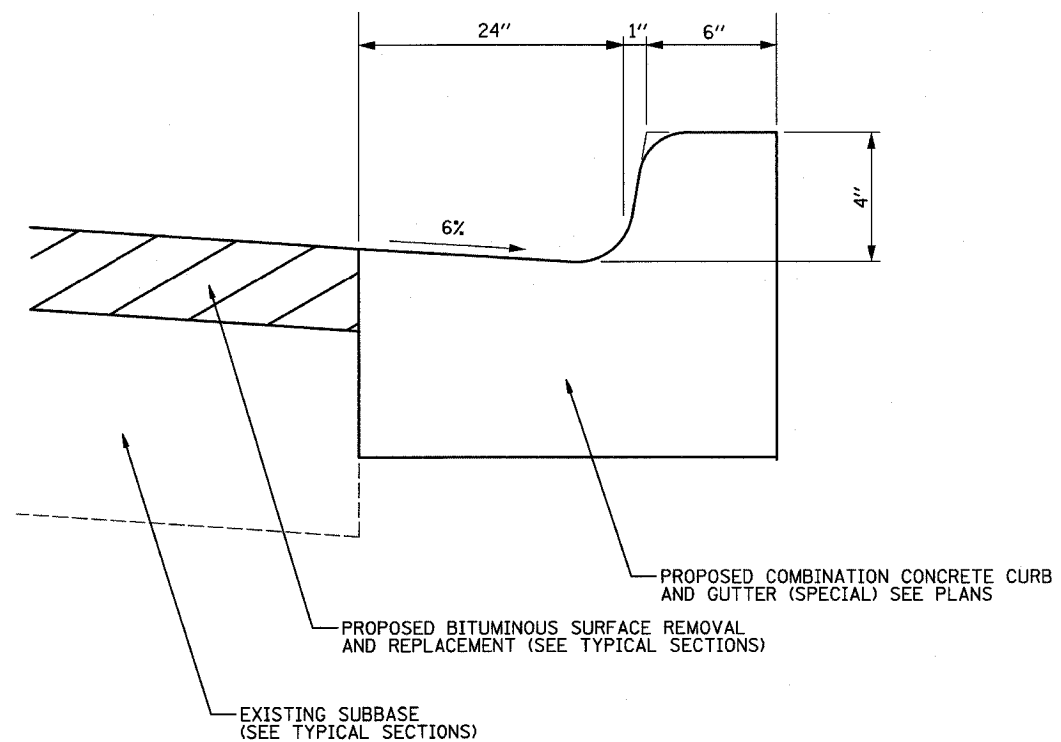

COMBINATION CONCRETE CURB AND GUTTER (SPECIAL)
(NOT TO SCALE)

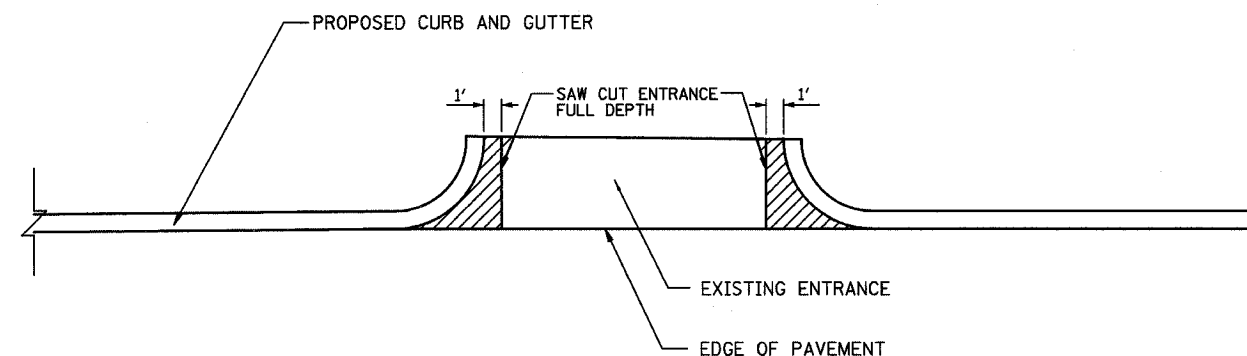

CURB AND GUTTER REPLACEMENT AT DRIVEWAYS
(NOT TO SCALE)

NOTES:

1. THE CONTRACTOR SHALL SAW CUT THE EXISTING DRIVEWAY PAVEMENT FULL DEPTH AS INDICATED ABOVE. THE SAW CUT SHALL NOT BE PAID FOR SEPARATELY BUT SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE PER FOOT FOR COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED.
2. THE CONTRACTOR SHALL REMOVE AND DISPOSE OF THE EXISTING DRIVEWAY PAVEMENT AS INDICATED ABOVE IN ACCORDANCE WITH SECTION 440 OF THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION ADOPTED JANUARY 1, 2002. THIS WORK SHALL NOT BE PAID FOR SEPARATELY BUT SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE PER FOOT FOR COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED.

#DATE#
#DRAWN#
#REF#

HOMER L. CHASTAIN & ASSOCIATES, LLP
CONSULTING ENGINEERS
DECATUR (217) 422-8544
CHICAGO (773) 714-0050
184-001397

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
FAP ROUTE 664
(WABASH AVE. & MACARTHUR BLVD)
SECTION D-6 RESURFACING 2005-1
SANGAMON COUNTY

MISCELLANEOUS DETAILS

DRAWN BY: DLB

CHECKED BY: CAS