




Contract #88753

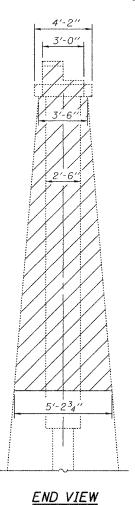

Notes: Portions of the existing pier to the east of the Stage Removal Line may interfere with the proposed superstructure. The Contractor may need to remove these portions while leaving in place, and undamaged, the portions that are required to support the Stage III & IV Traffic. It is the Contractor's responsibility to remove the interfering portions of the pier, so that it won't interfere with the erection of steel girders. Cost included with Removal of Existing Structures No. 2.

Existing reinforcement at the removal line (Elev. 455.0) shall be cut off flush and covered with 2" layer of cement grout. Cost included with Removal of Existing Structures No. 2.

EXISTING PIER DETAILS

F.A.P. RTE. 315 - SEC. (18BRY-1)BR

FULTON COUNTY

STATION 74+09.000

STRUCTURE NO. 029-0068

00025\0290058cub.dgn 5/16/2005 10:34:28 A