

F.A.S.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
878	01-00090-00-RS	HAMILTON	4	4
FED. ROAD DIST. NO. 7		ILLINOIS	ADEN ROAD	
LEC JOB # HQ4IL013HM				
CONTRACT NO. 95426				

**SCHEDULE OF PAVEMENT MARKINGS**

STATION	TO	STATION	LOCATION	LENGTH - FOOT	
CENTERLINE					
0+00		174+11		2435	
EDGE LINE					
0+00		53+23	RT.	5323	
53+91		160+54	RT.	10663	
160+96		174+11	RT.	1315	
EDGE LINE					
0+00		53+48	LT.	5348	
53+94		119+66	LT.	6572	
120+10		160+57	LT.	4047	
160+98		174+11	LT.	1313	
NO. PASSING					
10+65		56+20	RT.	4555	
95+00		163+50	RT.	6850	
25+50		74+50	LT.	4900	
117+50		174+11	LT.	5661	
				TOTAL	58982

THE ABOVE QUANTITY IS INCLUDED IN PAINT PAVEMENT MARKING-LINE 4" IN THE SUMMARY OF QUANTITIES.

**SCHEDULE OF AGGREGATE SHOULDER STONE IN TANGENT**

STATION	TO	STATION	LOCATION	ALLOWED TONS EST. QUANTITY	
0+00		61+78.65	LT.	287.5	
0+00		61+78.65	RT.	268.9	
67+26.99		68+66.26	LT.	6.3	
67+26.99		68+66.26	RT.	7.5	
74+13.06		174+11	LT.	555.2	
74+13.06		174+11	RT.	480.1	
				TOTAL	1605.5


THE ABOVE QUANTITY IS FOR THE ENTIRE SECTION AND IS INCLUDED IN THE QUANTITY FOR AGGREGATE SHOULDERS, TYPE B IN THE SUMMARY OF QUANTITIES.

**SCHEDULE OF AGGREGATE SHOULDER STONE IN SUPERELEVATION**

STATION	TO	STATION	LOCATION	ALLOWED TONS EST. QUANTITY	
61+78.65		67+26.99	LT.	18.1	
61+78.65		67+26.99	RT.	58.4	
68+66.26		74+13.06	LT.	49.2	
68+66.26		74+13.06	RT.	18.9	
				TOTAL	144.6

THE ABOVE QUANTITY IS FOR THE ENTIRE SECTION AND IS INCLUDED IN THE QUANTITY FOR AGGREGATE SHOULDERS, TYPE B IN THE SUMMARY OF QUANTITIES.

**AGGREGATE SHOULDER DETAIL**

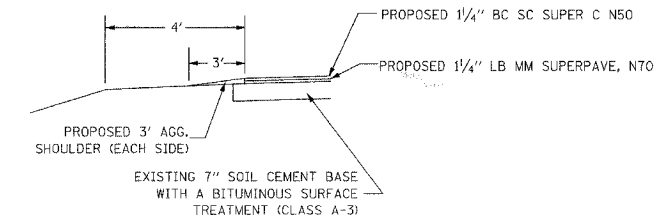

**SCHEDULE FOR SUPERELEVATION RATES**

CURVE #2	CURVE #3
TANGENT RUNOFF BEGINS STA 61+78.65	TANGENT RUNOFF BEGINS STA 68+66.26
S.E. RUNOFF BEGINS STA 62+16.24	S.E. RUNOFF BEGINS STA 69+03.85
FULL S.E. BEG STA 62+99.41	FULL S.E. BEG STA 69+88.46
FULL S.E. END STA 66+06.23	FULL S.E. END STA 72+90.86
S.E. END STA 66+89.60	S.E. END STA 73+75.47
TANGENT RUNOFF ENDS STA 67+26.99	TANGENT RUNOFF ENDS STA 74+13.06
S.E. RATE = 0.0346 FT / FT	S.E. RATE = 0.0352 FT / FT

323 W. 3RD ST.  
P.O. BOX 160  
MT. CARMEL, IL  
62863  
PHONE:  
(618)-262-8651  
FAX:  
(618)-263-3327

405 W. STATE ST.  
SUITE 1  
PRINCETON, IN  
47570  
PHONE:  
(812)-386-7611  
FAX:  
(812)-385-2812



PROFESSIONAL  
DESIGN FIRM  
LAND SURVEY &  
PROFESSIONAL  
ENGINEERING  
CORPORATION  
184-00687  
(82-032435)(35-002769)



DUSTIN K. BUNTING  
NAME  
*Dustin K. Bunting*  
SIGNATURE  
DATE  
11-30-05  
EXPIRES