
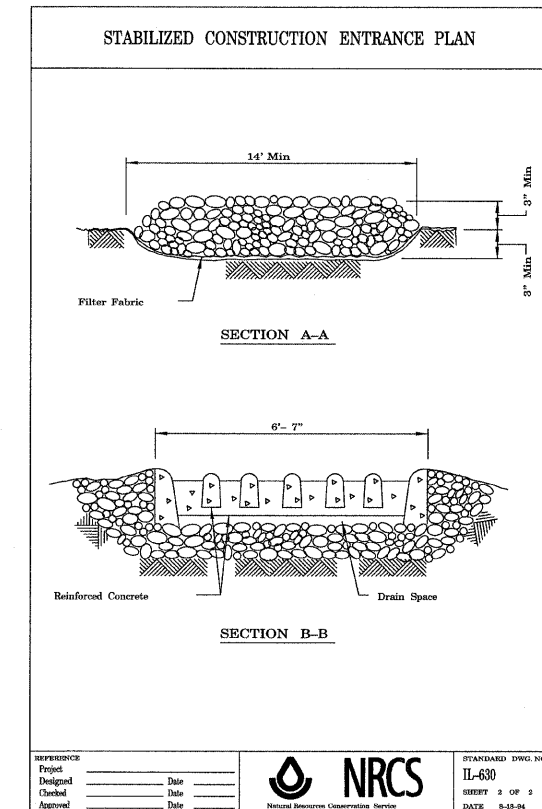


GENERAL NOTES - AND EROSION CONTROL REQUIREMENTS:

1. THE CONTRACTOR WILL BE REQUIRED TO IMPLEMENT AND MAINTAIN EROSION CONTROL MEASURES IMMEDIATELY AFTER STRIPPING OF EXISTING VEGETATION.
2. NO RUNOFF FROM STRIPPED AREAS WILL LEAVE THE SITE OTHER THAN THROUGH AN EROSION CONTROL SYSTEM FOLLOWING STANDARD 280001. THE CONTRACTOR WILL ADJUST HIS OPERATIONS AND IMPLEMENT EROSION CONTROL MEASURES ACCORDINGLY.
3. THE QUANTITY SHOWN FOR INLET FILTER AND SEDIMENT TRAPS IS SUFFICIENT FOR ONE (1) SET UP AND THREE (3) REPLACEMENTS OVER THE DURATION OF THE CONTRACT. THESE ITEMS ARE MEASURED AS EACH, REGARDLESS OF THE TYPE OR CONFIGURATION USED.
4. THE CONTRACTOR SHALL SURROUND ALL EARTH STOCKPILES WITH SILT FILTER FENCE.
5. EROSION CONTROL MEASURES SHALL BE INSPECTED WITHIN 24 HOURS OF ANY STORM EXCEEDING 0.5 INCH OF PRECIPITATION.
6. ALL CONSTRUCTION ACTIVITIES SHALL BE IN ACCORDANCE WITH THE NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES) STORM WATER PERMIT.
7. EROSION CONTROL BLANKET SHALL BE USED WITH TEMPORARY EROSION CONTROL SEEDING FOR EXPOSED AREAS.
8. ALL DISTURBED AREAS SHALL BE SEED OR SODDED AS SOON AS PRACTICAL AFTER CONSTRUCTION ACTIVITIES IN THAT AREA HAVE CONCLUDED. AREAS THAT HAVE BEEN STRIPPED AND WILL NOT RECEIVE PERMANENT LANDSCAPING BEFORE THE END OF THE FALL SEEDING RESTRICTION SHALL RECEIVE EROSION CONTROL SEEDING.
9. AS WORK PROGRESSES, ALL SLOPES STEEPER THAN 1:3 ON CUT OR EMBANKMENT AREAS THAT ARE CONSTRUCTED TO A HEIGHT OF 5 OR MORE FEET SHALL BE SEED IMMEDIATELY. ALL FLATTER AREAS THAT DO NOT HAVE A COVER OF VEGETATION AND WHERE NO FURTHER WORK IS TO OCCUR FOR ONE MONTH OR MORE SHALL BE SEED AND MULCHED WITHIN SEVEN (7) CALENDAR DAYS, UNLESS OTHERWISE DIRECTED BY THE ENGINEER. STOCKPILES SHALL BE SEED WITH EROSION CONTROL SEEDING. A SUFFICIENT QUANTITY OF EROSION CONTROL SEEDING IS SPECIFIED TO COVER THE LIMITS OF LANDSCAPING CONSTRUCTION ONCE.
10. STABILIZATION MEASURES SHALL BE INITIATED AS SOON AS PRACTICAL IN PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITIES HAVE TEMPORARILY OR PERMANENTLY CEASED, BUT IN NO CASE MORE THAN 14 DAYS AFTER THE CONSTRUCTION ACTIVITY IN THAT PORTION OF THE SITE HAS TEMPORARILY OR PERMANENTLY CEASED AND ON ALL DISTURBED PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITY WILL NOT OCCUR FOR A PERIOD OF 21 OR MORE CALENDAR DAYS.
11. TEMPORARY MULCH SHALL BE USED INSTEAD OF TEMPORARY EROSION CONTROL SEEDING WHEN GRADING WILL OCCUR AFTER SEPTEMBER 30TH OR IN THE WINTER WHEN TEMPORARY SEED WILL NOT GERMINATE AND PROVIDE EROSION PROTECTION UNTIL THE FOLLOWING SPRING.
12. THE CONTRACTOR SHALL UTILIZE A STABILIZED CONSTRUCTION ENTRANCE PER STANDARD SHOWN ON THIS PAGE.
13. THE USE OF HAY OR STRAW BALES SHALL NOT BE PERMITTED IN THE IMPLEMENTATION OF TEMPORARY DITCH CHECKS OR INLET AND PIPE PROTECTION.

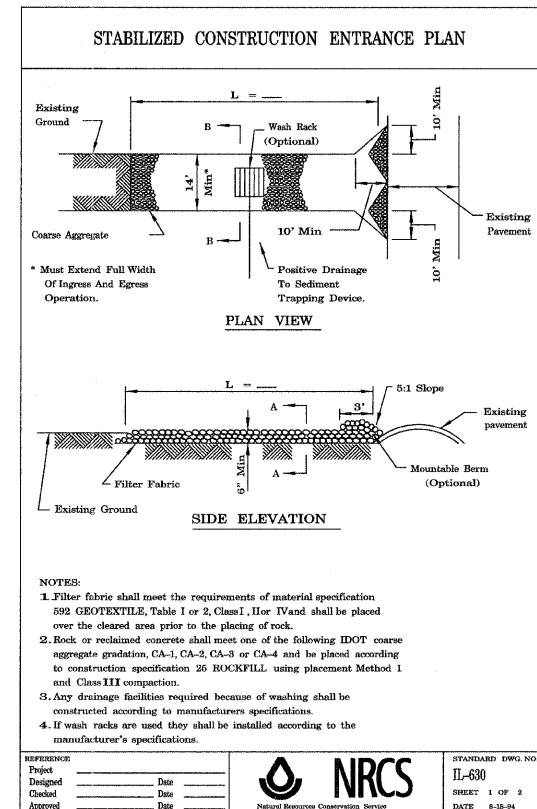

| | | | |
|----------------------------|-----------------------|-------------------|-----------|
| TYLIN INTERNATIONAL | USER NAME = #USER# | DESIGNED - AZ | REVISED - |
| | PLOT SCALE = #SCALE# | DRAWN - AZ | REVISED - |
| | PLOT DATE = 4/28/2011 | CHECKED - DMJ | REVISED - |
| | | DATE - 03/25/2011 | REVISED - |

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

| | | | |
|---|-------------------------|------|---------|
| CENTRAL AVENUE OVER I-55 EROSION CONTROL GENERAL NOTES | | | |
| SCALE: 1:50 | SHEET NO. 1 OF 1 SHEETS | STA. | TO STA. |

| | | | | |
|---------------------|--------------------|--------|---------------------------|-----------|
| F.A.I. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
| I-55 | 0711.2R & 1011.1BR | COOK | 741 | 167 |
| FED. ROAD DIST. NO. | | | ILLINOIS FED. AID PROJECT | |
| | | | CONTRACT NO. 60999 | |