




CON T-2" PVC
725.0 FT. (COMMON TRENCH)

UD- 2*4 #6G XLP USE 1
725.0 FT. (COMMON TRENCH)

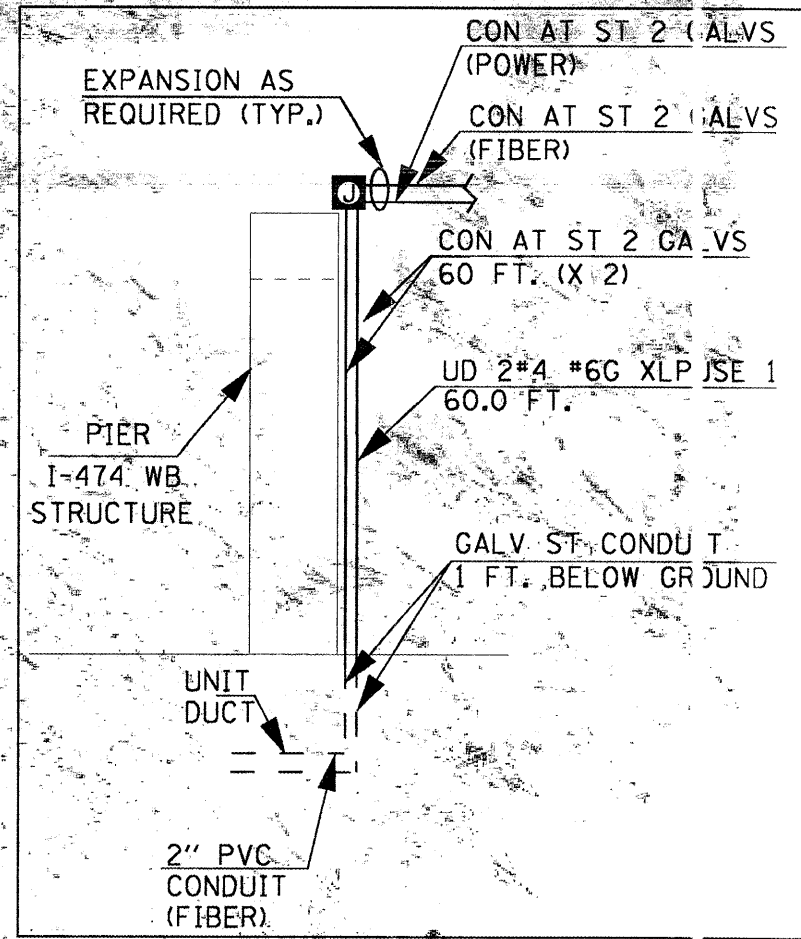

DETAIL "A"

JUN. BX SS-AS 24X24X10
1.0 EACH

SEE DETAIL "A"

CON AT ST 2 GALVS
300.0 FT.
(FOR FIBER OPTIC CABLES)

CON AT ST 2 GALVS
300.0 FT.
(FOR POWER CABLES)

CONDUIT AND UNIT DUCT SHALL BE INSTALLED AT A 30" MINIMUM DEPTH

I-474 SHADE LOHMAN CCTV SURVEILLANCE (PEORIA COUNTY APPROACH) BILL OF MATERIALS		
ITEM DESCRIPTION	UNIT	TOTAL QTY.
CONDUIT IN TRENCH, 2" DIA., PVC	FOOT	725.0
CONDUIT ATTACHED TO STRUCTURE, 2" DIA., GALVANIZED STEEL	FOOT	720.0
JUNCTION BOX, SS, ATTACHED TO STRUCTURE, 24" X 24" X 10"	EACH	1.0
UNIT DUCT, 600V, 2-1C NO.4, 1/C NO.6 GROUND, (XLP-TYPE USE)	FOOT	790.0
TRENCH AND BACKFILL FOR ELECTRICAL WORK	FOOT	725.0
FIBER OPTIC CABLE 48 FIBERS, SINGLE MODE	FOOT	1095.0

FILE NAME =	USER NAME = hwaider	DESIGNED -	REVISED -
68069 - I-474 Shade Lohman Bridge CCTV	Surveillance - Final 2-7-11.dgn	DRAWN -	REVISED -
	PLOT SCALE = 100.000' / IN.	CHECKED -	REVISED -
	PLOT DATE = 2/7/2011	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

I-474 SHADE LOHMAN BRIDGE
CCTV CAMERA SURVEILLANCE - PEORIA COUNTY APPROACH
SCALE: _____ ITS SHEET NO. 3 OF 16 SHEETS STA. _____ TO STA. _____

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
474	I(172,9015B)I-2	PEORIA	127	39
CONTRACT NO. 68069			ILLINOIS FED. AID PROJECT	