

**EROSION CONTROL SCHEDULE**

STATION TO STATION	MULCH, METHOD 2 (NOTE 1)	TEMPORARY EROSION CONTROL SEEDING	TEMPORARY DITCH CHECKS	PERIMETER EROSION BARRIER
190+92.60 TO 84+97.91	7.00	1,368	67	2,870
<b>TOTALS</b>	<b>7.00</b>	<b>1,368</b>	<b>67</b>	<b>2,870</b>


NOTE:  
1. MULCH, METHOD 2 TOTAL IS ROUNDED TO THE NEAREST 0.25 ACRE

- NOTES:**
- THE CONTRACTOR SHALL INSTALL THE HEAVY DUTY EROSION CONTROL BLANKET WHERE THE GRADING SLOPES ARE AT 3:1 OR STEEPER, OTHERWISE USE EROSION CONTROL BLANKET.
  - STRAW BALES, HAY BALES, PERIMETER EROSION BARRIER AND SILT FENCE WILL NOT BE PERMITTED FOR TEMPORARY OR PERMANENT DITCH CHECKS. DITCH CHECKS SHALL BE COMPOSED OF AGGREGATE (IF SPECIFIED), ENVIROBERM, TRIANGULAR SILT DIKES, GEORIDGE AND ROLLED EXCELSIOR.
  - MULCH METHOD 2 AS APPLIED TO TEMPORARY EROSION CONTROL SEEDING, SHALL CONFORM TO SECTION 251 OF THE STANDARD SPECIFICATIONS. MULCH METHOD 2 WILL BE PAID FOR SEPARATELY.
  - SEE ROADWAY DETAILS FOR STABILIZED CONSTRUCTION ENTRANCE DETAILS (AGGREGATE FOR TEMPORARY ACCESS) AND RIPRAP DETAILS.
  - SEE ROADWAY DETAIL SHEET FOR AGGREGATE FOR TEMPORARY ACCESS QUANTITY.

**SEEDING SCHEDULE**

SHEET	STATION TO STATION	SEEDING CLASS 2A (NOTE 1)	NITROGEN FERTILIZER NUTRIENT	PHOSPHORUS FERTILIZER NUTRIENT	POTASSIUM FERTILIZER NUTRIENT	EROSION CONTROL BLANKET	HEAVY DUTY EROSION CONTROL BLANKET
PLAN-1	190+92.60 TO 195+75.00	2.81	254	254	254	5,473	7,807
PLAN-2	195+75.00 TO 84+97.91	2.35	212	212	212	4,469	6,885
PLAN-3	7+00.00 TO END	1.67	151	151	151	4,342	3,709
<b>TOTALS</b>		<b>7.00</b>	<b>617</b>	<b>617</b>	<b>617</b>	<b>14,284</b>	<b>18,401</b>

NOTE:  
1. SEEDING CLASS 2A TOTAL IS ROUNDED TO THE NEAREST 0.25 ACRE

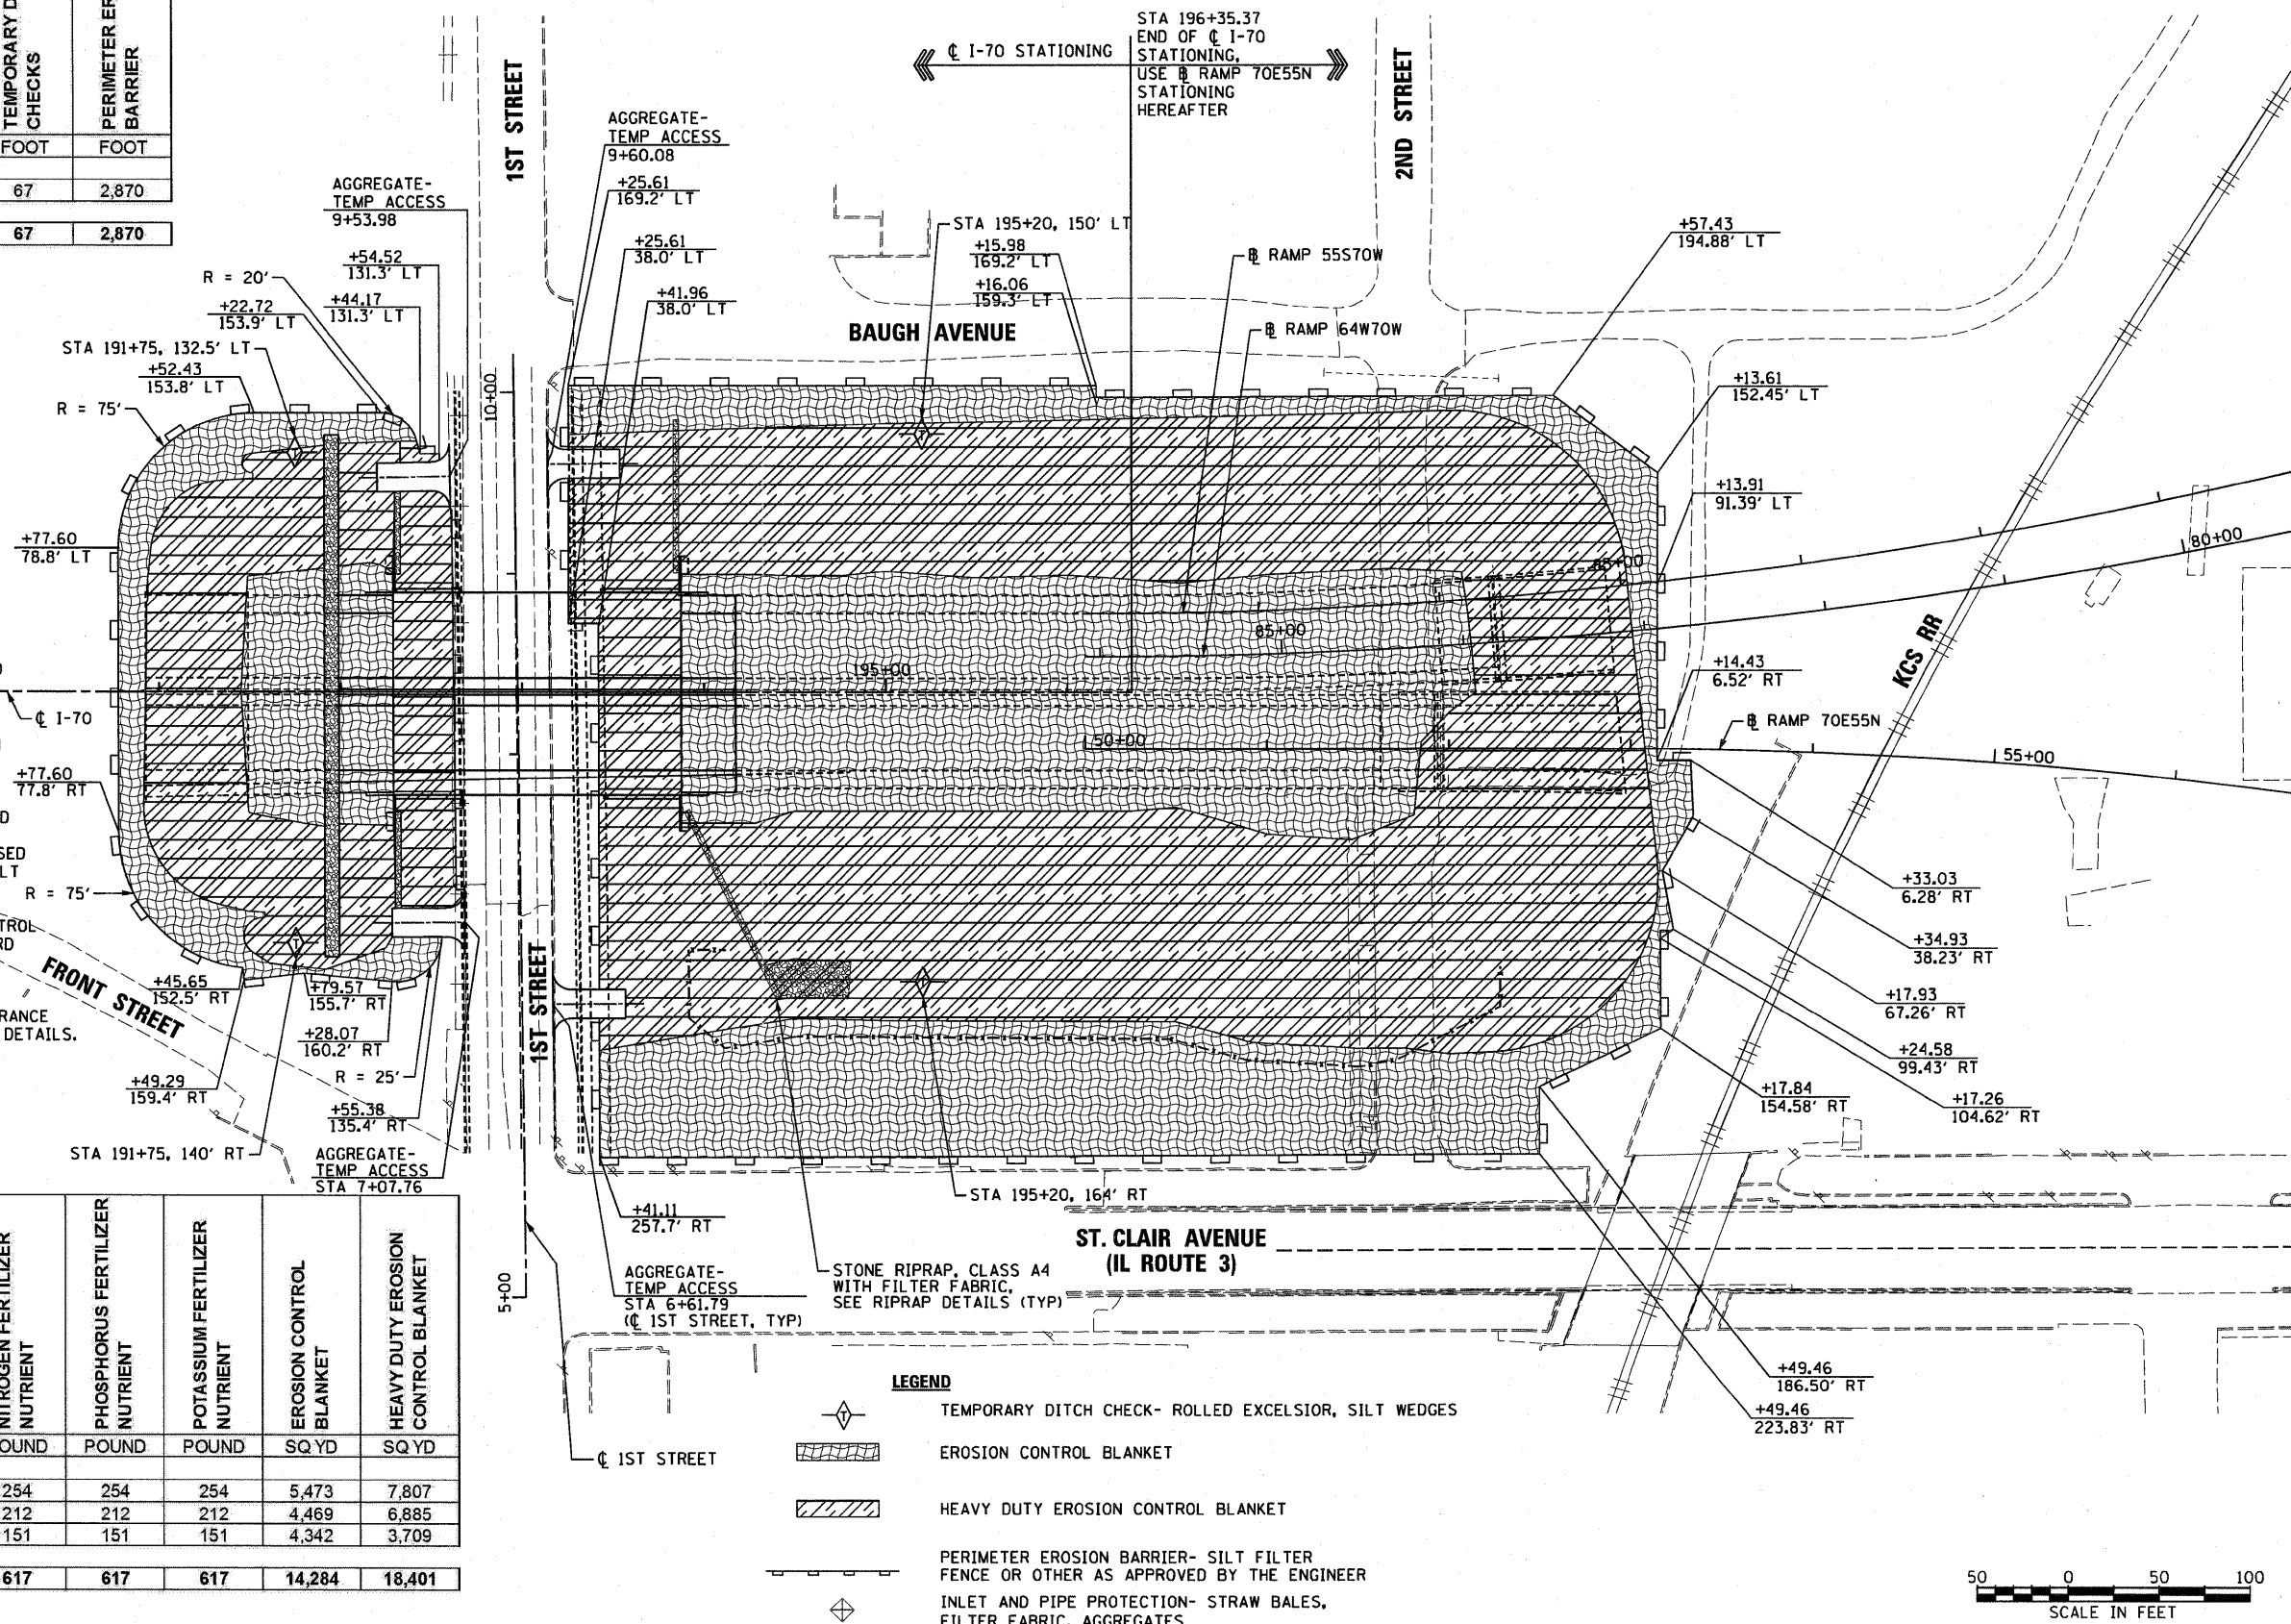

- LEGEND**
- TEMPORARY DITCH CHECK- ROLLED EXCELSIOR, SILT WEDGES
  - EROSION CONTROL BLANKET
  - HEAVY DUTY EROSION CONTROL BLANKET
  - PERIMETER EROSION BARRIER- SILT FILTER FENCE OR OTHER AS APPROVED BY THE ENGINEER
  - INLET AND PIPE PROTECTION- STRAW BALES, FILTER FABRIC, AGGREGATES

