


STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D9 PATCH 2022-10	ILLINOIS	9	1
			CONTRACT NO. 78955	

UNION/JOHNSON  
D-99-050-22

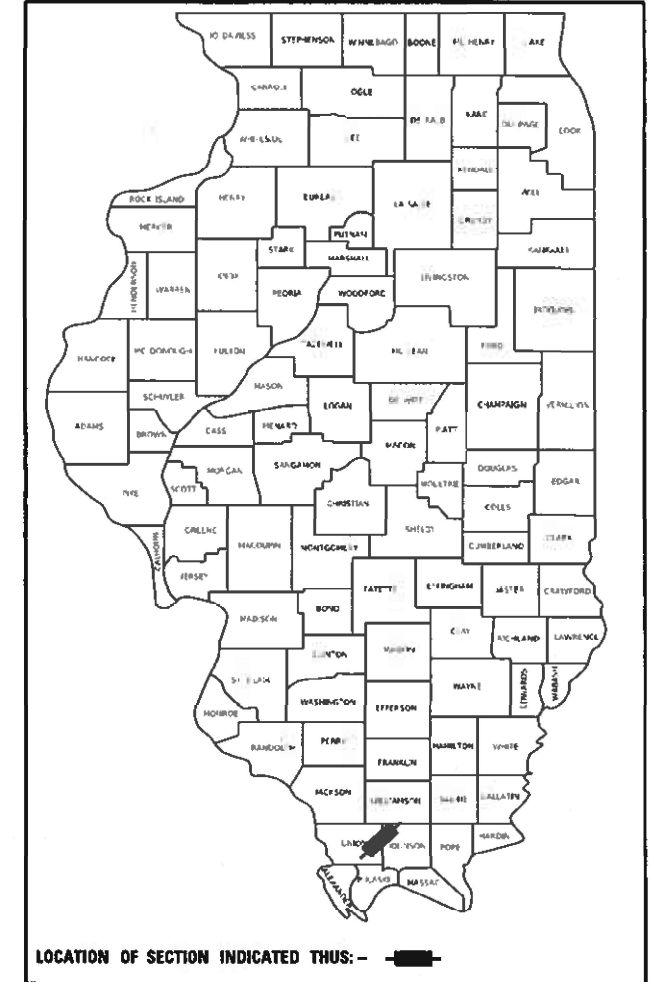

FOR INDEX OF SHEETS, SEE SHEET NO. 3  
FOR SUMMARY OF QUANTITIES, SEE SHEET NO. 4

PROPOSED  
HIGHWAY PLANS

FAI ROUTE 57 (I-57)  
SECTION D9 PATCH 2022-10

TRAFFIC DATA

TRAFFIC DATA I-57

I-57 Johnson & Union County				
	2021	2022	2042	
PV =	4,825	4,875	5,945	
SU =	275	280	340	
MU =	3,600	3,635	4,435	
ADT =	8,700	8,790	10,720	

TOWNSHIPS


- GOREVILLE
- LICK CREEK
- STOKES
- SARATOGA
- DONGOLA

PATCHING  
UNION/JOHNSON COUNTY

PROJECT BEGINS  
STA. 460+50  
MM 44

C-99-067-22

UNION/JOHNSON  
COUNTY LINE  
MM 40

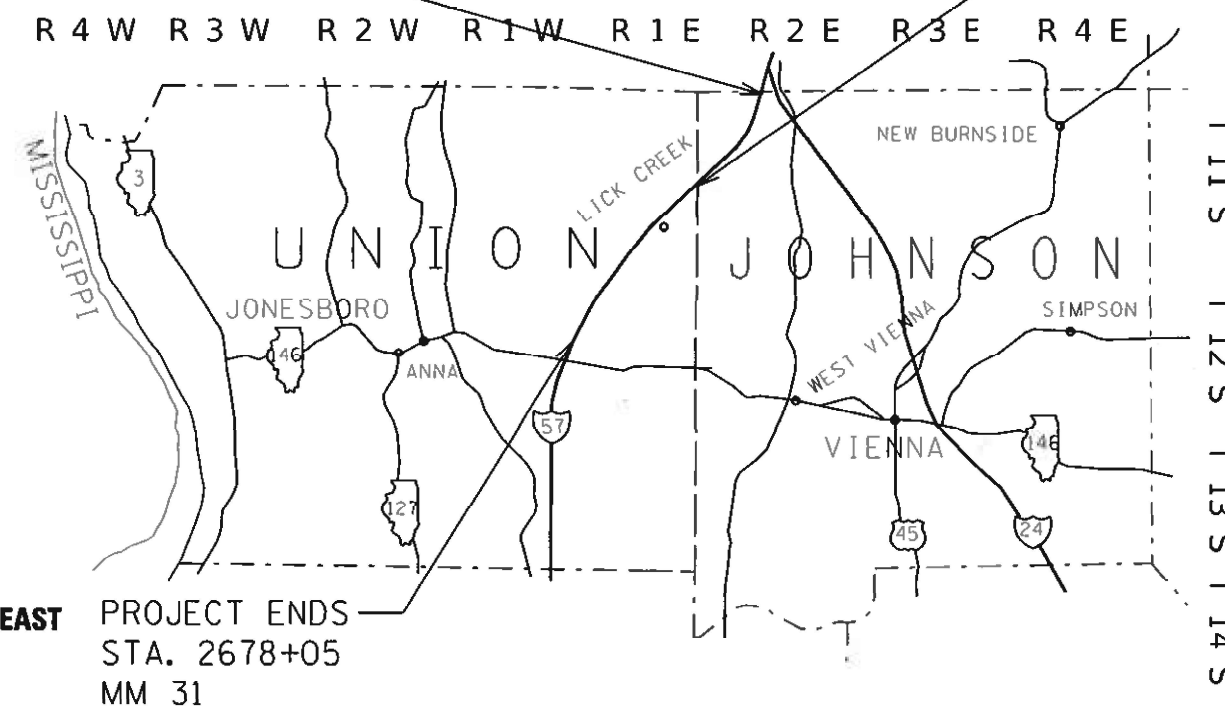

PROJECT ENDS  
STA. 2678+05  
MM 31

STATION EQUATIONS:  
STA 462+04.74 BK = 00+06.39 AH  
STA 224+40.74 BK = 2232+74.28 AH

COORDINATE SYSTEM : NAD 1983 STATEPLANE ILLINOIS EAST  
POSTED SPEED : 70 MPH

J.U.L.I.E.  
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION  
1-800-892-0123  
OR 811

PROJECT ENGINEER VALERIE ROLLA  
PROJECT DESIGNER BRANDY MAES

CONTRACT NO. 78955

GROSS LENGTH = 67120 FT. = 12.71 MILES  
NET LENGTH = 67120 FT. = 12.71 MILES

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

SUBMITTED March 10 20 22

Stephen M. Inavia  
REGION FIVE ENGINEER

May 13, 2022 [Signature]  
ENGINEER OF DESIGN AND ENVIRONMENT

May 13, 2022 [Signature]  
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY  
OF THE STATE OF ILLINOIS

Model: Default  
FILE NAME: D:\Road\pwr\Bentley\pwr\DOT\Documents\DOT - Offices\District 9 Proj\41878955\CAD\Drawings\CDsheet1 - 78955-Sheets.dwg

USER NAME = pwr001	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100.0000' / in	CHECKED -	REVISED -
PLOT DATE = 2/28/2022	DATE -	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**SIGNATURE SHEET**

SCALE: SHEET OF SHEETS STA. TO STA.

F.A.I. RATE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D9 PATCH 2022-10		9	2
CONTRACT NO. 78955				
ILLINOIS FED. AID PROJECT				

UNION/JOHNSON

Prepared By: Charles Stein  
DISTRICT STUDIES & PLANS ENGINEER

Examined By: Nancy Ste  
DISTRICT LAND ACQUISITION ENGINEER

Examined By: Carrie Nelson  
DISTRICT PROGRAM DEVELOPMENT ENGINEER

Examined By: R. [Signature]  
DISTRICT OPERATIONS ENGINEER

Examined By: Douglas J. [Signature]  
DISTRICT PROJECT IMPLEMENTATION ENGINEER

Examined By: Douglas J. [Signature]  
DISTRICT CONSTRUCTION ENGINEER

Examined By: R. [Signature]  
DISTRICT MATERIALS ENGINEER

## INDEX OF SHEETS

SHEET NO	DESCRIPTION
1	COVER SHEET
2	SIGNATURE SHEET
3	INDEX OF SHEETS, HIGHWAY STANDARDS & GENERAL NOTES
4	SUMMARY OF QUANTITIES
5-8	SCHEDULES
9	DETAILS

## HIGHWAY STANDARDS

000001-08	Standard Symbols, Abbreviations and Patterns
001001-02	Areas of Reinforcement Bars
001006	Decimal of an Inch and of a Foot
442101-09	Class B Patches
701400-11	Approach to Lane Closure, Freeway/Expressway
701401-13	Lane Closure, Freeway/Expressway
701411-09	Lane Closure, Multilane, at Entrance or Exit Ramp, for Speeds > 45 MPH
701901-08	Traffic Control Devices
420001-10	Pavement Joints
420701-03	Pavement Welded Wire Reinforcement

## GENERAL NOTES

COMMITMENTS: NONE

REV. - MS

MODEL: Default  
 FILE: M:\msc\p\illinois\ca\hendery.com\PROJECTS\Documents\DOT\_Offices\District\_9\Project\78955\CADD\DATA\CAD\Sheets\78955\_Sheets.dgn

USER NAME = maesbl	DESIGNED -	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>INDEX OF SHEETS, HIGHWAY STANDARDS, GENERAL NOTES &amp; COMMITMENTS</b>	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
	DRAWN -	REVISED -			57	D9 PATCH 2022-10	-	9	3	
PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -			CONTRACT NO. 78955					
PLOT DATE = 2/28/2022	DATE -	REVISED -			ILLINOIS   FED. AID PROJECT					
				SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	

UNION/JOHNSON

# SUMMARY OF QUANTITIES

COUNTY:	JOHNSON CO	UNION CO
ROUTE:	FAI 57	FAI 57
FUNDING:	100% STATE	100% STATE
LOCATION:	RURAL	RURAL
	ROADWAY	ROADWAY
	0006	0006

CODE NUMBER	ITEM DESCRIPTION	UNIT	TOTAL QUANTITY	ROADWAY 0006	ROADWAY 0006
44200050	WELDED WIRE REINFORCEMENT	SQ YD	143	27	116
44201019	CLASS B PATCHES, TYPE II, 14 INCH	SQ YD	1,696	156	1,540
44201023	CLASS B PATCHES, TYPE III, 14 INCH	SQ YD	43	0	43
44201025	CLASS B PATCHES, TYPE IV, 14 INCH	SQ YD	100	27	73
44201299	DOWEL BARS 1 1/2"	EACH	4,100	380	3,720
44213200	SAW CUTS	FOOT	10,120	956	9,164
44213204	TIE BARS 3/4"	EACH	21	0	21
67100100	MOBILIZATION	L SUM	1	0	1
70100420	TRAFFIC CONTROL AND PROTECTION, STANDARD 701411	EACH	7	3	4
70100800	TRAFFIC CONTROL AND PROTECTION, STANDARD 701401	L SUM	1	0	1
70103815	TRAFFIC CONTROL SURVEILLANCE	CAL DA	30	10	20
70107025	CHANGEABLE MESSAGE SIGN	CAL DA	56	14	42

REV. - MS

MODEL: Default  
 FILE: M:\GIS\Projects\GIS\Projects\DOT\_Offices\District\_9\Project\78955\CADD\Drawings\CAD\Drawings\78955-Sheets.dgn

USER NAME = maesbl PLOT SCALE = 100.0000' / in. PLOT DATE = 3/9/2022	DESIGNED - DRAWN - CHECKED - DATE -	REVISED - REVISED - REVISED - REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>SUMMARY OF QUANTITIES</b>	SCALE:	SHEET OF SHEETS STA. TO STA.	F.A.I. RTE: 57 SECTION: D9 PATCH 2022-10 COUNTY: - TOTAL SHEETS: 9 SHEET NO.: 4 CONTRACT NO. 78955 ILLINOIS FED. AID PROJECT	UNION/JOHNSON
--	--	--	---	------------------------------	--------	------------------------------	--	---------------

I - 57 NORTH BOUND PATCHING  
JOHNSON COUNTY - DRIVING LANE

LOCATION	WIDTH (FT)	LENGTH (FT)	CLASS B PATCHES TYPE II 14 INCH	CLASS B PATCHES TYPE IV 14 INCH	SAW CUTS	DOWELL BARS, 1 1/2"	WELDED WIRE REINFORCEMENT
MP	DRIVING LANE		SQ YD	SQ YD	FOOT	EACH	SQ YD
41.0	12	6	8		48	20	
41.0	12	6	8		48	20	
41.2	12	20		27	76	20	27
41.3	12	6	8		48	20	
41.4	12	6	8		48	20	
41.4	12	6	8		48	20	
41.6	12	6	8		48	20	
41.7	12	6	8		48	20	
42.9	12	6	8		48	20	
43.4	12	6	8		48	20	
43.4	12	6	8		48	20	
43.5	12	6	8		48	20	
43.5	12	6	8		48	20	
43.7	12	6	8		48	20	
43.8	12	6	8		48	20	
43.9	12	10	14		56	20	
TOTAL			126	27	804	320	27

I - 57 NORTH BOUND PATCHING  
JOHNSON COUNTY - PASSING LANE

LOCATION	WIDTH (FT)	LENGTH (FT)	CLASS B PATCHES TYPE II 14 INCH	SAW CUTS	DOWELL BARS, 1 1/2"
MP	PASSING LANE		SQ YD	FOOT	EACH
40.5	12	10	14	56	20
40.5	12	6	8	48	20
43.1	12	6	8	48	20
TOTAL			30	152	60

I - 57 NORTH BOUND PATCHING  
UNION COUNTY - TABLE 1 - DRIVING LANE

LOCATION	WIDTH (FT)	LENGTH (FT)	CLASS B PATCHES TYPE II 14 INCH	CLASS B PATCHES TYPE III 14 INCH	CLASS B PATCHES TYPE IV 14 INCH	SAW CUTS	DOWELL BARS, 1 1/2"	WELDED WIRE REINFORCEMENT	TIE BARS 3/4"
MP	DRIVING LANE		SQ YD	SQ YD	SQ YD	FOOT	EACH	SQ YD	EACH
31.0									
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	8	11			52	20		
	12	8	11			52	20		
	12	6	8			48	20		
	12	6	8			48	20		
32.0									
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
32.5									
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
32.6									
	12	6	8			48	20		
32.7									
	12	6	8			48	20		
	12	6	8			48	20		
	12	8	11			52	20		
32.8									
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
33.0									
	12	6	8			48	20		
	12	8	11			52	20		
33.1									
	12	26			35	88	20	35	10
33.2									
	12	6	8			48	20		
	12	6	8			48	20		
33.4									
	12	6	8			48	20		
	12	6	8			48	20		
	12	10	14			56	20		
33.6									
	12	6	8			48	20		
	12	6	8			48	20		
34.6									
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
35.0									
	12	6	8			48	20		
	12	6	8			48	20		
SUBTOTAL TABLE 1			338	0	35	2032	820	35	10

MODEL: Default  
 FILE: \\maesbl-pw-beadley.com\P\I\DOT\Documents\DOT Office\Director @Project\78955\CADD\Drawings\CAD\Sheets\78955-Sheets.dwg  
 PROJECT: 78955\CADD\Drawings\CAD\Sheets\78955-Sheets.dwg

USER NAME = maesbl	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100,0000' / in.	CHECKED -	REVISED -
PLOT DATE = 2/28/2022	DATE -	REVISED -

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

PATCHING SCHEDULE

SCALE: SHEET OF SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D9 PATCH 2022-10	-	9	5
CONTRACT NO. 78955			ILLINOIS FED. AID PROJECT	

**I - 57 NORTH BOUND PATCHING  
UNION COUNTY - TABLE 2 - DRIVING LANE**

LOCATION	WIDTH (FT)	LENGTH (FT)	CLASS B PATCHES TYPE II 14 INCH	CLASS B PATCHES TYPE III 14 INCH	CLASS B PATCHES TYPE IV 14 INCH	SAW CUTS	DOWELL BARS, 1 1/2"	WELDED WIRE REINFORCEMENT	TIE BARS 3/4"
MP	DRIVING LANE		SQ YD	SQ YD	SQ YD	FOOT	EACH	SQ YD	EACH
35.1	12	6	8			48	20		
35.2	12	6	8			48	20		
	12	10	14			56	20		
	12	6	8			48	20		
	12	10	14			56	20		
35.3	12	6	8			48	20		
	12	10	14			56	20		
	12	10	14			56	20		
35.5	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	17		23		70	20	23	
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
35.8	12	6	8			48	20		
	12	6	8			48	20		
36.0	12	8	11			52	20		
	12	6	8			48	20		
	12	8	11			52	20		
	12	6	8			48	20		
36.5	12	6	8			48	20		
	12	6	8			48	20		
	12	8	11			52	20		
	12	8	11			52	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
37.0	12	6	8			48	20		
	12	6	8			48	20		
37.2	12	6	8			48	20		
	12	6	8			48	20		
SUBTOTAL TABLE 2			308	23	0	1750	700	23	0

**I - 57 NORTH BOUND PATCHING  
UNION COUNTY - TABLE 3 - DRIVING LANE**

LOCATION	WIDTH (FT)	LENGTH (FT)	CLASS B PATCHES TYPE II 14 INCH	CLASS B PATCHES TYPE III 14 INCH	CLASS B PATCHES TYPE IV 14 INCH	SAW CUTS	DOWELL BARS, 1 1/2"	WELDED WIRE REINFORCEMENT	TIE BARS 3/4"
MP	DRIVING LANE		SQ YD	SQ YD	SQ YD	FOOT	EACH	SQ YD	EACH
37.5	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
38.0	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
38.5	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	8	11			52	20		
39.0									
SUBTOTAL TABLE 3			147	0	0	868	360	0	0
SUBTOTAL TABLE 1			338	0	35	2032	820	35	10
SUBTOTAL TABLE 2			308	23	0	1750	700	23	0
TOTAL TABLES 1-3			793	23	35	4650	1880	58	10

MODEL: Default  
FILE: \\maesb\p\project\78955\CADD\Drawings\CAD\Drawings\78955-Sheets.dwg  
PROJECT: 78955\CADD\Drawings\CAD\Drawings\78955-Sheets.dwg

USER NAME = maesb	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100,0000' / in.	CHECKED -	REVISED -
PLOT DATE = 2/28/2022	DATE -	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**PATCHING SCHEDULE**

SCALE: SHEET OF SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D9 PATCH 2022-10	-	9	6
CONTRACT NO. 78955			ILLINOIS FED. AID PROJECT	

**I - 57 NORTH BOUND PATCHING  
UNION COUNTY - TABLE 4 - PASSING LANE**

LOCATION	WIDTH (FT)	LENGTH (FT)	CLASS B PATCHES TYPE II 14 INCH	CLASS B PATCHES TYPE III 14 INCH	CLASS B PATCHES TYPE IV 14 INCH	SAW CUTS	DOWELL BARS, 1 1/2"	WELDED WIRE REINFORCEMENT	TIE BARS 3/4"
MP	PASSING LANE		SQ YD	SQ YD	SQ YD	FOOT	EACH	SQ YD	EACH
31.0									
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
32.0									
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
32.5									
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
32.6									
	12	6	8			48	20		
32.7									
	12	6	8			48	20		
	12	6	8			48	20		
	12	8	11			52	20		
32.8									
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
33.0									
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
33.2									
	12	6	8			48	20		
	12	6	8			48	20		
33.4									
	12	6	8			48	20		
	12	6	8			48	20		
34.0									
	12	6	8			48	20		
	12	6	8			48	20		
34.6									
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
<b>SUBTOTAL TABLE 4</b>			<b>339</b>	<b>0</b>	<b>0</b>	<b>2020</b>	<b>840</b>	<b>0</b>	<b>0</b>

**I - 57 NORTH BOUND PATCHING  
UNION COUNTY - TABLE 5 - PASSING LANE**

LOCATION	WIDTH (FT)	LENGTH (FT)	CLASS B PATCHES TYPE II 14 INCH	CLASS B PATCHES TYPE III 14 INCH	CLASS B PATCHES TYPE IV 14 INCH	SAW CUTS	DOWELL BARS, 1 1/2"	WELDED WIRE REINFORCEMENT	TIE BARS 3/4"
MP	PASSING LANE		SQ YD	SQ YD	SQ YD	FOOT	EACH	SQ YD	EACH
35.0									
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
35.1									
	12	6	8			48	20		
35.2									
	12	6	8			48	20		
	12	10	14			56	20		
35.3									
	12	6	8			48	20		
	12	10	14			56	20		
	12	6	8			48	20		
35.5									
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
35.8									
	12	6	8			48	20		
	12	6	8			48	20		
36.0									
	12	8	11			52	20		
	12	6	8			48	20		
	12	28			38	92	20	38	11
	12	6	8			48	20		
	12	8	11			52	20		
	12	6	8			48	20		
36.5									
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	8	11			52	20		
	12	8	11			52	20		
	12	6	8			48	20		
	12	15		20		66	20	20	
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
<b>SUBTOTAL TABLE 5</b>			<b>312</b>	<b>20</b>	<b>38</b>	<b>1918</b>	<b>760</b>	<b>58</b>	<b>11</b>

MODEL: Default  
 FILE: MALE\_P...  
 PROJECT: 78955-UnionCountyDataCAD:sheets:78955-Sheets.dwg  
 PLOT DATE: 2/28/2022

USER NAME = maesbl	DESIGNED -	REVISED -
PLOT SCALE = 100,0000' / in.	DRAWN -	REVISED -
PLOT DATE = 2/28/2022	CHECKED -	REVISED -
	DATE -	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

<b>PATCHING SCHEDULE</b>			
SCALE:	SHEET	OF SHEETS	STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D9 PATCH 2022-10	-	9	7
CONTRACT NO. 78955				
ILLINOIS FED. AID PROJECT				

**I - 57 NORTH BOUND PATCHING  
UNION COUNTY - TABLE 6 - PASSING LANE**

LOCATION	WIDTH (FT)	LENGTH (FT)	CLASS B PATCHES TYPE II 14 INCH	CLASS B PATCHES TYPE III 14 INCH	CLASS B PATCHES TYPE IV 14 INCH	SAW CUTS	DOWELL BARS, 1 1/2"	WELDED WIRE REINFORCEMENT	TIE BARS 3/4"
MP	PASSING LANE		SQ YD	SQ YD	SQ YD	FOOT	EACH	SQ YD	EACH
37.0	12	6	8			48	20		
	12	6	8			48	20		
37.2	12	6	8			48	20		
	12	6	8			48	20		
37.5	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
	12	6	8			48	20		
38.0	12	6	8			48	20		
	12	6	8			48	20		
38.5	12	6	8			48	20		
	12	6	8			48	20		
39.0									
SUBTOTAL TABLE 6			96	0	0	576	240	0	0
SUBTOTAL TABLE 4			339	0	0	2020	840	0	0
SUBTOTAL TABLE 5			312	20	38	1918	760	58	11
TOTAL TABLES 4-6			747	20	38	4514	1840	58	11

**I - 57 NORTH BOUND PATCHING  
UNION & JOHNSON COUNTY SUMMARY**

LOCATION		CLASS B PATCHES TYPE II 14 INCH	CLASS B PATCHES TYPE III 14 INCH	CLASS B PATCHES TYPE IV 14 INCH	SAW CUTS	DOWELL BARS, 1 1/2"	WELDED WIRE REINFORCEMENT	TIE BARS 3/4"
County	Lane	SQ YD	SQ YD	SQ YD	FOOT	EACH	SQ YD	EACH
Union	DL	793	23	35	4650	1880	58	10
Union	PL	747	20	38	4514	1840	58	11
Johnson	DL	126	0	27	804	320	27	0
Johnson	PL	30	0	0	152	60	0	0
TOTAL		1696	43	100	10120	4100	143	21

MODEL: Default  
FILE: Mainfile.pxl  
Subject: new benchtop.com  
P:\INDOT\Documents\DOT Office\Dir\dir: @Project\78955\CADD\Drawn\CAD\Sheets\78955-Sheets.dgn

USER NAME = maesbl	DESIGNED -	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>PATCHING SCHEDULE</b>				F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
PLOT SCALE = 100,0000' / in.	DRAWN -	REVISED -						57	D9 PATCH 2022-10	-	9	8
PLOT DATE = 2/28/2022	CHECKED -	REVISED -		SCALE: SHEET OF SHEETS STA. TO STA.				CONTRACT NO. 78955				
	DATE -	REVISED -						ILLINOIS FED. AID PROJECT UNION/JOHNSON				



LOCATION:  
I-57  
UNION/JOHNSON  
COUNTIES



STA. 460+49.74 MM 44  
I-24 INTERCHANGE

STAIONING  
INCREASING

STA. 462+04.74 BK  
STA. 00+06.39 AH

STAIONING  
INCREASING

MM 40  
GOREVILLE RD INTERCHANGE

STA. 224+40.74 BK UNION/JOHNSON  
STA. 2232+74.28 AH COUNTY LINE

STAIONING  
INCREASING

MM 36  
LICK CREEK RD INTERCHANGE

TRAIL OF TEARS REST STOP

STA. 2678+05 MM 31

MODEL: Default  
FILE NAME: p:\ultra-cw-beadley.com\PIV\DOT\Documents\DOT Office\Dir\drt\_@Project\78955\CADD\DATA\CAD\Sheets\78955-Sheets.dgn

USER NAME = maesbl	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100,0000 ' / in.	CHECKED -	REVISED -
PLOT DATE = 3/9/2022	DATE -	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**DETAILS: STATIONING**

SCALE: SHEET OF SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	D9 PATCH 2022-10	-	9	9
CONTRACT NO. 78955				

ILLINOIS FED. AID PROJECT UNION/JOHNSON