


75TH STREET SYSTEM MAP

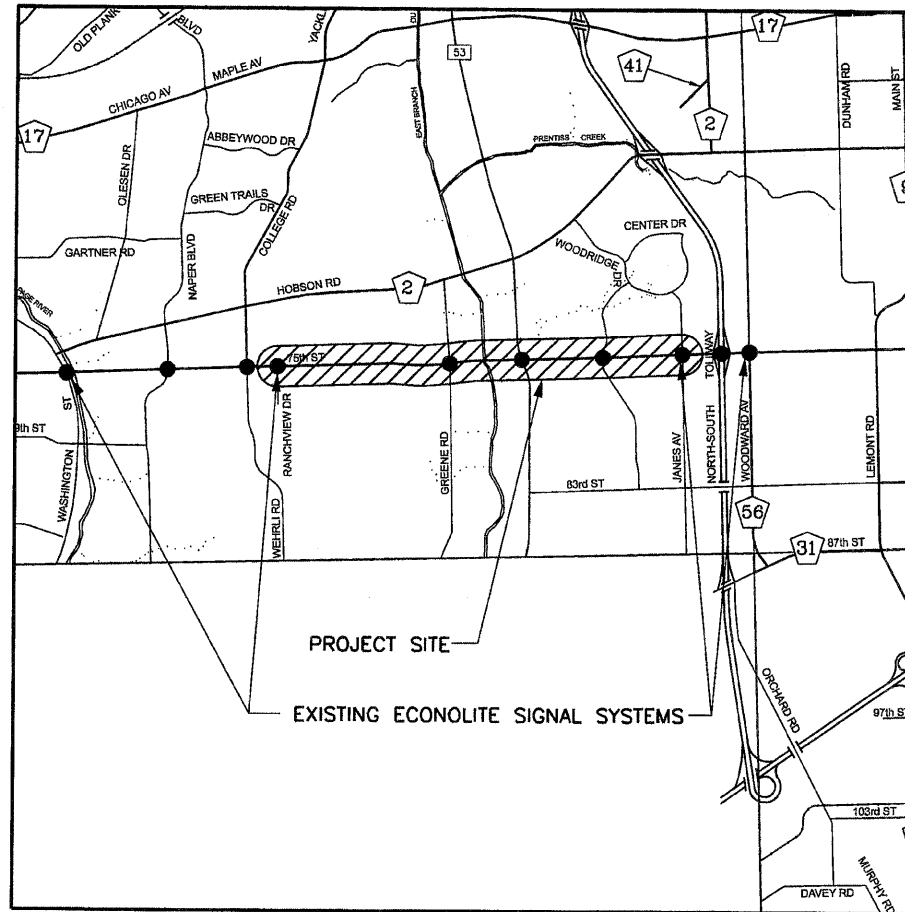

HANDHOLE TABLE

NUMBER	TYPE	STATION	OFFSET(FT)
S1	HEAVY-DUTY	152+00	103 LT
S2	HEAVY-DUTY	156+00	104 LT
S3	HEAVY-DUTY	160+00	84 LT
S4	REGULAR	164+00	87 LT
S5	REGULAR	168+00	107 LT
S6	REGULAR	172+00	105 LT
S7	REGULAR	176+00	108 LT
S8	REGULAR	180+30	107 LT
S9	REGULAR	184+00	106 LT
S10	REGULAR	188+00	107 LT
S11	REGULAR	192+00	107 LT
S12	REGULAR	196+00	110 LT
S13	HEAVY-DUTY	205+00	80 RT
S14	HEAVY-DUTY	209+00	80 RT
S15	HEAVY-DUTY	212+50	46 RT
S16	HEAVY-DUTY	216+00	46 RT
S17	HEAVY-DUTY	220+50	60 RT
S18	REGULAR	236+00	88 LT
S19	REGULAR	240+00	88 LT
S20	REGULAR	244+00	88 LT
S21	REGULAR	248+00	88 LT
S22	REGULAR	252+00	88 LT
S23	REGULAR	256+00	88 LT
S24	REGULAR	265+00	44 RT
S25	REGULAR	269+00	44 RT
S26	REGULAR	273+00	45 R
S27	REGULAR	277+00	44 RT
S28	REGULAR	281+00	44 RT
S29	REGULAR	285+00	54 RT
S30	REGULAR	288+50	65 RT

SCHEDULE OF QUANTITIES

67100100	MOBILIZATION	L SUM	0.11
70102630	TRAFFIC CONTROL AND PROTECTION, STANDARD 701601	L SUM	0.11
70102635	TRAFFIC CONTROL AND PROTECTION, STANDARD 701701	L SUM	0.11
70102640	TRAFFIC CONTROL AND PROTECTION, STANDARD 701801	L SUM	0.11
81000600	CONDUIT IN TRENCH, 2" DIA., GALVANIZED STEEL	FOOT	12557
81018500	CONDUIT PUSHED, 2" DIA., GALVANIZED STEEL	FOOT	634
81100600	CONDUIT ATTACHED TO STRUCTURE, 2" DIA., GALVANIZED STEEL	FOOT	120
81300720	JUNCTION BOX, STAINLESS STEEL, ATTACHED TO STRUCTURE, 16" X 12" X 8"	EACH	2
81400100	HANDHOLE	EACH	22
81400200	HEAVY-DUTY HANDHOLE	EACH	8
81500200	TRENCH AND BACKFILL FOR ELECTRICAL WORK	FOOT	12557
X0322925	ELECTRIC CABLE IN CONDUIT, TRACER, NO. 14 1C	FOOT	15890
XX006654	FIBER OPTIC CABLE IN CONDUIT, NO. 62.5/125, MM12F SM24F	FOOT	15890

REVISIONS	
NAME	DATE

DUPAGE COUNTY DIVISION OF TRANSPORTATION
**75TH STREET INTERCONNECT PLAN,
 HANDHOLE TABLE AND
 SCHEDULE OF QUANTITIES**

SCALE: NONE
 DATE: 4/23/10

DRAWN BY: TH
 DESIGNED BY: TH
 CHECKED BY: DAZ