


PIPE CULVERT SCHEDULES

LOCATION		TYPE OF ENTRANCE	PIPE CULVERT REMOVAL	PIPE CULVERTS			END SECTION
				TYPE 1	CLASS A		
					TYPE 1	TYPE 1	
					EQUIVALENT ROUND SIZE		
STATION	OFFSET	FOOT	15" CMP	24"	30"	EACH	
0.769	RT	SIDEROAD (CROWN ST)	17		25		2
0.836	RT	SIDEROAD (VALLEY STEEL RD)	48		48		2
0.854	LT	SIDEROAD (MICHAEL RD)	60			65	2
1.018	LT	COMMERCIAL (BITUMINOUS)	25	28			
1.032	LT	COMMERCIAL (BITUMINOUS)	40	40			
1.057	RT	SIDEROAD (WASHINGTON ST)	42	42			
1.150	RT	COMMERCIAL (BITUMINOUS)	18	24			
1.163	RT	PRIVATE (AGGREGATE)	20	20			
TOTAL			270	154	73	73	6

DETAIL OF PIPE CULVERT END SECTION

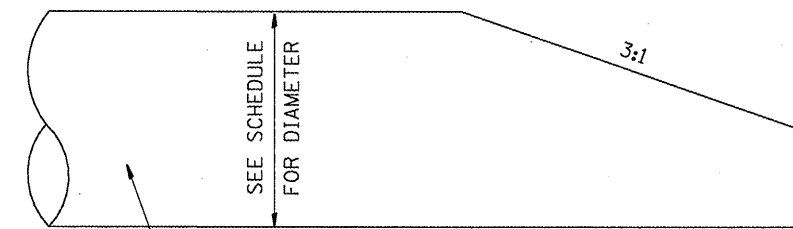

PROPOSED PIPE CULVERT

BEVELED END SECTION

THE BEVELED END PORTION WILL BE PAID FOR AT THE SAME UNIT PRICE PER LINEAL FOOT AS THE PIPE CULVERT

FILE NAME =	USER NAME = #USER#	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	PIPE CULVERTS SCHEDULE	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
#FILE#		DRAWN -	REVISED -			329	20RS-4(20-2,19)RS-3	RANDOLPH	19	9B	
	PLOT SCALE = #SCALE#	CHECKED -	REVISED -			CONTRACT NO. 76D36					
	PLOT DATE = #DATE#	DATE -	REVISED -			SCALE:	SHEET NO. OF SHEETS	STA. TO STA.	FED. ROAD DIST. NO.	ILLINOIS FED. AID PROJECT	