

07-30-2021 LETTING ITEM 024

FOR INDEX OF SHEETS & STATE STANDARDS  
SEE SHEET NO. 2

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION  
DIVISION OF HIGHWAYS

**PROPOSED  
HIGHWAY PLANS**  
VARIOUS ROUTES  
SECTION D2 SG 2022-1  
VARIOUS COUNTIES  
C-92-090-21


FA RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2022-1	VARIOUS	31	1

CONTRACT NO. 64R21

D-92-065-21



LOCATION OF SECTION INDICATED THIS: - [shaded box]

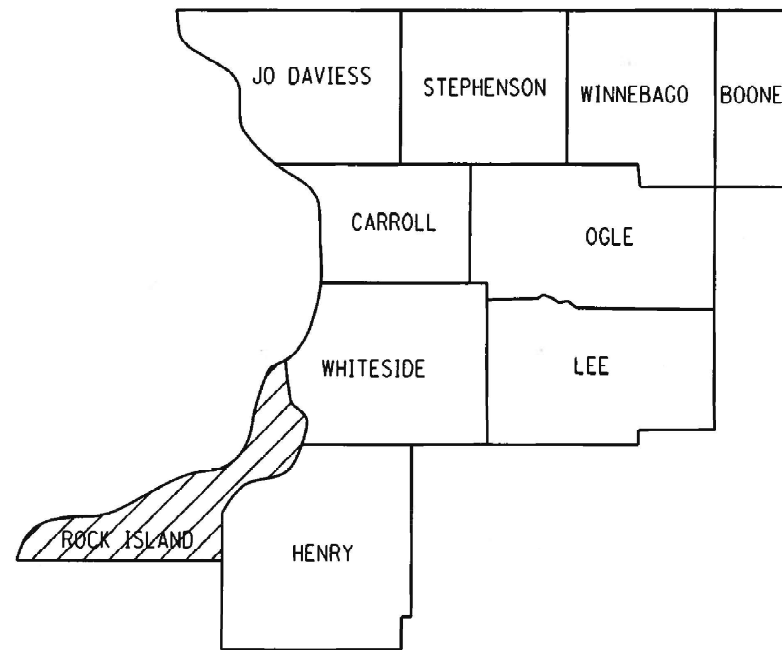

LOCATION OF SECTION INDICATED THIS: - [hatched box]

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION  
DIVISION OF HIGHWAYS

SUBMITTED April 29, 2021

*[Signature]*  
REGION ENGINEER

June 25, 2021

*[Signature]*  
ENGINEER OF DESIGN AND ENVIRONMENT

June 25, 2021

*[Signature]*  
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION 13

PROJECT ENGINEER: KRISTIE NYDEREK

SQUAD LEADER: TROY EBENEZER

J.U.L.I.E.  
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION  
1-800-892-0123

GROSS LENGTH OF PROJECT = 0 FT = 0.0 MILES  
NET LENGTH OF PROJECT = 0 FT = 0.0 MILES

CONTRACT NO. 64R21

PRINTED BY THE AUTHORITY  
OF THE STATE OF ILLINOIS



# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Rock Island	US 6	4.76	south of I-280	Right	R5-1	48	48		16.00							1				
Rock Island	US 6	4.80	South of I-280	Right	R5-1A	42	30	8.75								1				
Rock Island	US 6	4.80	south of I-280	Left	R5-I100	48	60		20.00							18				
Rock Island	US 6	4.83	At 27th St	Right	R10-5	30	36	7.50								1				
Rock Island	US 6	5.18	0.2 miles west of US 15	Right	M2-1	21	15	2.19								16				US 150
					M1-4	30	24	5.00												
Rock Island	US 6	5.29	400 feet west of US 150	Right	M1-4	24	24	4.00								14				US 6 US 150
					M1-4	30	24	5.00												
					M6-3	21	15	2.19												
					M5-1R	21	15	2.19												
Rock Island	US 6	5.36	At US 150	Left	R6-1L	36	12	3.00										1		
Rock Island	US 6	5.38	100 feet east of US 150	Left	M1-4	30	24	5.00								14				US 150 US 6
					M1-4	24	24	4.00												
					M6-1L	21	15	2.19												
					M6-3	21	15	2.19												
Rock Island	US 6	6.47	Between 4th and 3rd in Coal Valley	Right	W3-3							9				16				Relocate from North to south side 1ST ST.
					W17-I100	30	9	1.88												
Rock Island	US 6	6.76	Between 4th and 3rd in Coal Valley	Left	W17-i100	30	9	1.88												1ST ST.
Rock Island	US 6	6.47	Between 4th and 3rd in Coal Valley	Right	W3-3					9										
Rock Island	US 6	7.21	200 feet west of Niabi Zoo Rd	Left	M3-4	24	12	2.00								14				US 6
					M1-4	24	24	4.00												
Rock Island	US 67	4.34	800 feet south of IL 94	Median	R4-7	24	30	5.00								16				
					W14-3	48	36	6.00												
Rock Island	US 67	4.41	400 feet south of IL 94	Median	M4-5	24	12	2.00								18				IL 192
					M1-I100	30	24	5.00												
					M6-1L	21	15	2.19												
Rock Island	US 67	4.47	100 feet south of IL 94	Median	M1-I100	24	24	4.00								16				IL 94
					M6-1L	21	15	2.19												
					R5-1	36	36	9.00												
Rock Island	US 67	4.47	100 feet south of IL 94	Right	M1-I100	24	24	4.00								18				IL 94 US 67
					M1-4	24	24	4.00												
					M6-1L	21	15	2.19												
					M6-3	21	15	2.19												

MODEL: Pktdrvt  
 FILE NAME: S:\TDC\Contract\US\Contract\64R21\64R21\_CADD\_shts.dwg

USER NAME = ditzlersa	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -
PLOT DATE = Apr-28-2021 09:11:00 AM	DATE -	REVISED -

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**

<b>SCHEDULE OF QUANTITIES</b>	
SCALE _____	SHEET _____ OF _____ SHEETS STA _____ TO STA _____

F.A. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2022-1	VARIOUS	31	3
CONTRACT NO. 64R21			ILLINOIS FED. AID PROJECT	

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes				
Rock Island	US 67	4.63	800 feet north of IL 94	Left	M2-1	21	15	2.19								18								
					M4-5	24	12	2.00																
					M1-I100	30	24	5.00																IL 192
					M6-1R	21	15	2.19																
					M1-I100	24	24	4.00																
Rock Island	US 67	4.99	At Frt Rd / 1st St	Median	R6-1L	36	12	3.00						11	5									
					R1-2	36	36	4.50																
Rock Island	US 67	4.99	At Frt Rd / 1st St	Median	R6-1L	36	12	3.00						11	5									
					R1-2	36	36	4.50																
Rock Island	US 67	5.24	At 116th Ave W	Median	R6-1L	36	12	3.00						11	5									
					R1-2	36	36	4.50																
Rock Island	US 67	5.24	At 116th Ave W	Median	R6-1L	36	12	3.00						11	5									
					R1-2	36	36	4.50																
Rock Island	US 67	5.63	At Old US 67 / 9th St	Median	R5-1	36	36	9.00						11	5									
Rock Island	US 67	5.64	At Old US 67 / 9th St	Median	R6-1L	36	12	3.00						11	5									
					R1-2	36	36	4.50																
Rock Island	US 67	5.64	At Old US 67 / 9th St	Median	R6-1L	36	12	3.00						11	5									
					R1-2	36	36	4.50																
Rock Island	US 67	5.64	At Old US 67 / 9th St	Left	R6-1L	36	12					3		11	5									
Rock Island	US 67	5.65	At Old US 67 / 9th St	Median	R5-1	36	36	9.00						11	5									
Rock Island	US 67	5.82	100 feet south of Coyne Center Rd	Left	M3-3	24	12	2.00								16								
					M1-4	24	24	4.00															US 67	
Rock Island	US 67	5.84	At Coyne Center Rd	Median	R6-1L	36	12	3.00						11	5									
					R1-2	36	36	4.50																
Rock Island	US 67	5.84	At Coyne Center Rd	Median	R6-1L	36	12	3.00						11	5									
					R1-2	36	36	4.50																
Rock Island	US 67	5.96	650' feet north of Coyne Center Rd	Left	W2-1	48	48		16.00							20								
					W17-I100	48	24	8.00															Coyne Center - Oak Grove Rd	
Rock Island	US 67	6.08	At Woodland Park Rd	Median	R6-1L	36	12	3.00						11	5									
					R1-2	36	36	4.50																
Rock Island	US 67	6.08	At Woodland Park Rd	Median	R6-1L	36	12	3.00						11	5									
					R1-2	36	36	4.50																

MOFH: D:\cadd\...  
 FILE NAME: STATECONTRACTS\CONTRACTS FOR LEASING\ROADS\CONTRACTS\64R21\64R21\_64R21\_64R21.dgn

USER NAME = ditzler	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100.0000 / in.	CHECKED - _____	REVISED - _____
PLOT DATE = Apr-28-2021 09:11:08 AM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**

**SCHEDULE OF QUANTITIES**  
 SCALE: \_\_\_\_\_ SHEET \_\_\_\_\_ OF \_\_\_\_\_ SHEETS STA \_\_\_\_\_ TO STA \_\_\_\_\_

FA RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2022-1	VARIOUS	31	4
CONTRACT NO. 64R21			ILLINOIS FED. AID PROJECT	





# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Rock Island	US 67	10.53	Between 41st Ave and 39th Ave	Left	R2-1(35)	30	36	7.50										1		
Rock Island	US 67	10.53	Between 41st Ave and 39th Ave	Right	R2-1(35)	30	36	7.50								1				
Rock Island	US 67	10.74	Between 37th and 35th Ave	Left	R2-1(35)	30	36	7.50										1		
Rock Island	US 67	10.96	At 33rd Ave.	Right	R2-1(35)	30	36	7.50								1				
Rock Island	US 67	11.08	100 feet south of 31st Ave	Right	M3-3	24	12	2.00						11	5					US 67
					M1-4	24	24	4.00												
Rock Island	US 67	11.12	100 feet north of 31st Ave	Right	M3-1	24	12	2.00								1				US 67
					M1-4	24	24	4.00								1				
Rock Island	US 67	11.25	north of 29th Ave	Right	R2-1(35)	30	36	7.50								1				
Rock Island	US 67	11.49	south of 25th Ave	Left	R2-1(35)	30	36	7.50										1		
Rock Island	US 67	11.50	south of 25th Ave	Right	R2-1(35)	30	36	7.50								1				
Rock Island	US 67	11.84	At 21st Ave	Left	R2-1(35)	30	36	7.50								1				
Rock Island	US 67	11.86	At 21st Ave	Right	R2-1(30)	30	36	7.50										1		
Rock Island	US 67	12.03	North of 19th Ave	Left	R2-1(30)	30	36	7.50						11	5					
Rock Island	US 67	12.03	North of 19th Ave	Right	R2-1(30)	30	36	7.50						11	5					
Rock Island	US 67	12.08	100 feet south of 31st Ave	Right	M3-3	24	12	2.00						11	5					US 67
					M1-4	24	24	4.00												
Rock Island	US 67	12.10	At 18th Ave	Left	R4-7	24	30	5.00						8			1			
Rock Island	US 67	12.10	At 18th Ave	Right	R4-7	24	30	5.00						8			1			
Rock Island	US 67	11.12	100 feet north of 31st Ave	Right	M3-1	24	12	2.00						10			1			US 67
					M1-4	24	24	4.00												
Rock Island	US 67	12.14	north of 18th Ave	Median	R6-1R	36	12	3.00						8	5					
Rock Island	US 67	12.20	At 16th Ave	Median	R4-7	24	30	5.00						8			1			
Rock Island	US 67	12.20	At 16th Ave	Median	R4-7	24	30	5.00						9			1			
					R6-1R	36	12	3.00												
Rock Island	US 67	12.26	North of 16th Ave	Right	R2-1(30)	30	36	7.50						11	5					
Rock Island	US 67	12.45	North of 13th Ave	Left	R2-1(30)	30	36	7.50										1		

MODEL: D:\cadd\...  
 FILE NAME: ...

USER NAME = dir2lsera	DESIGNED -	REVISED -
PLOT SCALE = 100.0000' / in	DRAWN -	REVISED -
PLOT DATE = Apr-28-2021 09:11:24 AM	CHECKED -	REVISED -
	DATE -	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

<b>SCHEDULE OF QUANTITIES</b>	
SCALE: _____	SHEET ____ OF ____ SHEETS STA. _____ TO STA. _____

SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
D2 5G 2022-1	VARIOUS	31	7
CONTRACT NO. 64R21		ILLINOIS FED. AID PROJECT	

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Rock Island	US 67	12.58	North of 13th Ave	Left	R2-1(30)	30	36	7.50									1			
Rock Island	US 67	12.73	North of 8th Ave	Median	R6-1R	36	12	3.00						8	5					
Rock Island	US 67	12.74	North of 8th Ave	Left	R2-1(30)	30	36	7.50										1		
Rock Island	US 67	12.77	At 7th Ave	Median	R4-7	24	30	5.00						9			1			
Rock Island	US 67	12.77	At 7th Ave	Median	R4-7	24	30	5.00						9			1			
Rock Island	US 67	12.77	At 7th Ave	Left	R4-7	24	30	5.00						9			1			
Rock Island	US 67	12.77	At 7th Ave	Right	R4-7	24	30	5.00						9			1			
Rock Island	US 67	12.79	At 7th Ave	Right	R4-7	24	30	5.00						9			1			
Rock Island	US 67	12.79	North of 7th Ave.	Right	M3-1	24	12	2.00						11	5					US 67
					M1-4	24	24	4.00												
Rock Island	US 67	12.80	North of 7th Ave.	Right	R2-1(30)	30	36	7.50										1		
Rock Island	US 67	12.82	North of 7th Ave.	Right	M3-1	24	12	2.00										1		US 67
					M1-4	24	24	4.00										1		
					MPSC	21	15	2.19										1		RIGHT LANE
Rock Island	US 67	12.82	At 5th Ave	Right	M3-1	24	12	2.00												US 67
					M1-4	24	24	4.00												
					M6-1R	21	15	2.19												
Rock Island	US 67	12.82	5th Ave, east of 11th	Left	M3-1	24	12	2.00						11	5					US 67
					M1-4	24	24	4.00												
Rock Island	US 67	12.97	5th Ave, east of 11th	Right	R2-1(30)	30	36	7.50						11	5					
Rock Island	US 67	12.97	5th Ave, east of 11th	Right	R2-1(30)	30	36	7.50										1		
Rock Island	US 67	13.11	5th Ave, east of 13th	Right	M3-1	24	12	2.00												US 67
					M1-4	24	24	4.00												
					MPSC	21	15	2.19												LEFT LANE
Rock Island	US 67	13.12	5th Ave, east of 13th	Left	M3-1	24	12	2.00												
Rock Island	US 67	13.14	5th Ave, east of 13th	Left	R3-7R	30	30	6.25						11	5					
Rock Island	US 67	13.16	5th Ave, east of 13th	Left	M3-1	24	12	2.00												US 67
					M1-4	24	24	4.00												
					M5-1L	21	15	2.19												
					R5-1	36	36	9.00												

MODEL: D:\dwg\...  
 FILE NAME: S:\TR\Contract\Contracts for Letting\Signage\Contract\64R21\64R21\_CADD\_30x40.dwg

USER NAME = di/lersa	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100.0000 / in	CHECKED -	REVISED -
PLOT DATE = Apr-28-2021 09:11:30 AM	DATE -	REVISED -

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**

<b>SCHEDULE OF QUANTITIES</b>	
SCALE: _____	SHEET _____ OF _____ SHEETS
STA _____	TO STA _____

SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
D2 SG 2022-1	VARIOUS	31	8
CONTRACT NO. 64R21		ILLINOIS FED. AID PROJECT	



# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes			
Rock Island	US 67	13.16	5th Ave, east of 13th	Left	M3-1	24	12	2.00						12	5						US 67		
					M1-4	24	24	4.00															
					M5-1L	21	15	2.19															
					R5-1	36	36	9.00															
Rock Island	US 67	13.18	5th Ave, east of 14th	Right	D1-2	36	18	4.50		6.19						1				^ MOLINE -< DAVENPORT IA			
Rock Island	US 67	13.19	5th Ave, east of 14th	Left	D1-2	36	18			6.19		4.5				1				^ MOLINE -< DAVENPORT IA			
Rock Island	US 67	13.21	5th Ave, east of 14th	Left	M3-1	24	12	2.00						12	5						US 67		
					M1-4	24	24	4.00															
					M6-1L	21	15	2.19															
Rock Island	US 67	13.24	5th Ave, east of 14th	Left	M3-1	24	12	2.00								1				US 67			
					M1-4	24	24	4.00							1								
					M6-1L	21	15	2.19							1								
					R5-1	36	36	9.00							1								
Rock Island	US 67	13.24	5TH Ave at 15th St	Right	RSPC	30	24	5.00								1				Lane Assignment Left only / Thru only			
Rock Island	US 67	13.25	15th St, north of 5th Ave	Right	M3-1	24	12	2.00						11	5					US 67			
					M1-4	24	24	4.00															
Rock Island	US 67	13.26	15th St, north of 5th Ave	Right	R2-1(30)	30	36	7.50								1							
Rock Island	US 67	13.27	15th St, north of 5th Ave	Left	R3-7L	30	36	7.50								1							
Rock Island	US 67	13.30	15th St, at 4th Ave	Left	R3-2	30	30	6.25								1				On mast arm			
Rock Island	US 67	13.33	15th St, north of 4th Ave	Left	M3-3	24	12	2.00						12	5					US 67			
					M1-4	24	24	4.00															
					M5-1L	21	15	2.19															
Rock Island	US 67	13.40	15th St, north of 3rd Ave	Left	D1-2	48	24	8.00								1				To I-80 -> Moline ->			
Rock Island	US 67	13.43	15th St, north of 4th Ave	Left	M3-3	24	12	2.00				7.5				1				US 67			
					M1-4	24	24	4.00							1								
					R2-1 (30)	30	36	7.50							1								
Rock Island	US 67	13.44	15th St, at 2nd Ave	Left	R3-2	24	24	4.00						10	5								
Rock Island	US 67	13.44	15th St, at 2nd Ave	Left	R1-1	36	36	9.00						11	5								
					R5-1	36	36	9.00															

MODEL: P:\1148\1148.dwg  
 FILE NAME: S:\1148\1148.dwg  
 USER: ditzler  
 DATE: 4/28/2021 9:11:34 AM

USER NAME = ditzler	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -
PLOT DATE = Apr-28-2021 09:11:34 AM	DATE -	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**SCHEDULE OF QUANTITIES**

SCALE: \_\_\_\_\_ SHEET \_\_\_\_\_ OF \_\_\_\_\_ SHEETS STA \_\_\_\_\_ TO STA \_\_\_\_\_

F.A. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2022-1	VARIOUS	31	9
			CONTRACT NO. 64R21	
ILLINOIS FED. AID PROJECT				

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood	banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes				
Rock Island	US 67	13.44	2nd Ave at 16th St	Right	M4-5	24	12	2.00									1								
					M1-1100	24	24	4.00												1				IL 92	
					M6-1L	21	15	2.19													1				
Rock Island	US 67	13.44	16th St, north of 2nd Ave	Right	M3-4	24	12	2.00								16									
					M1-1100	24	24	4.00																IL 92	
					M6-1L	21	15	2.19																	
					M3-4	24	12	2.00																	
					M1-1100	24	24	4.00																	
					M6-1R	21	15	2.19																	
Rock Island	US 67	13.46	15th St, at 2nd Ave	Right	W4-1R	36	36	9.00								16									
Rock Island	US 67	13.47	15th St, at 2nd Ave	Left	M4-5	24	12	2.00														1			
					M1-1100	24	24	4.00																IL 92	
					M6-2R	21	15	2.19																1	
Rock Island	US 67	13.48	15th St, north of 5th Ave	Right	R2-1(35)	30	36	7.50						11	5										
Rock Island	US 67	13.49	15th St, north of 5th Ave	Left	R2-1(30)	30	36	7.50														1			
Rock Island	US 67	13.59	On the Mississippi River Bridge	Left	M4-5	24	12	2.00														1			
					M1-1100	24	24	4.00																IL 92	
					M5-2R	21	15	2.19																1	
Rock Island	US 67	13.62	On the Mississippi River Bridge	Left	D1-2	36	24	6.00														1	Andalusia -> Moline ->		
Rock Island	US 67	13.67	On the Mississippi River Bridge	Left	M2-1	21	15	2.19															1		
					M1-1100	24	24	4.00																	IL 92
Rock Island	US 67	13.75	On the Mississippi River Bridge	Right	R2-1(35)	30	36	7.50						11	5										
Rock Island	US 67	13.75	On the Mississippi River Bridge	Left	R2-1(35)	30	36	7.50															1		
Rock Island	US 67	14.05	On the Mississippi River Bridge	Left	R2-1(35)	30	36	7.50		7.5													1		
Rock Island	US 67	14.19	On the Mississippi River Bridge	Left	R2-1(35)	30	36	7.50															1		
Rock Island	US 67	60.02	4th Ave, just west of 15th	Right	M3-3	24	12	2.00						11	5										
					M1-4	24	24	4.00																	US 67
Rock Island	US 67	60.02	4th Ave, just west of 15th	Left	M3-3	24	12	2.00						11	5										
					M1-4	24	24	4.00																	US 67
Rock Island	US 67	60.05	4th Ave, just west of 15th	Right	R2-1(30)	30	36					7.5		11	5										
Rock Island	US 67	60.05	4th Ave, just west of 15th	Left	R2-1(30)	30	36	7.50						11	5										

MOPL: Detail  
 FILE NAME: S:\P\Contract\Contracts for Letting\Signage\Contract\64R21\_CADD\_sht.dgn

USER NAME = djl/tersa	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100.0000' / in	CHECKED - _____	REVISED - _____
PLOT DATE = Apr-28-2021 09:11:39 AM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**

<b>SCHEDULE OF QUANTITIES</b>	
SCALE: _____	SHEET _____ OF _____ SHEETS STA _____ TO STA _____

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2022-1	VARIOUS	31	10
CONTRACT NO. 64R21				
ILLINOIS FED. AID PROJECT				

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes			
Rock Island	US 67	60.22	4th Ave, west of 15th	Right	M3-3	24	12	2.00								16							
					M1-4	24	24	4.00															US 67
					MPSC	21	15	2.19															
Rock Island	US 67	60.22	4th Ave, west of 15th	Left	M3-3	24	12	2.00								16							
					M1-4	24	24	4.00															US 67
					MPSC	21	15	2.19															LEFT LANE
Rock Island	US 67	60.24	4th Ave, west of 15th	Right	M3-3	24	12	2.00				6			16								
Rock Island	US 67	60.24	4th Ave, west of 15th	Left	M3-3	24	12	2.00				6			16								
Rock Island	US 67	60.27	4th Ave, west of 15th	Right	R3-7R	30	30	6.25						11	5								
Rock Island	US 67	60.27	4th Ave, west of 15th	Left	R3-7L	30	30	6.25						11	5								
Rock Island	US 67	60.29	4th Ave, west of 15th	Right	M3-3	24	12	2.00								16							
					M1-4	24	24	4.00															US 67
					M6-1	21	15	2.19															
Rock Island	US 67	60.29	4th Ave, west of 15th	Left	M3-3	24	12	2.00								16							
					M1-4	24	24	4.00															US 67
					M6-1	21	15	2.19															
Rock Island	US 67	60.32	4TH Ave and 15th St	Right	M3-3	24	12	2.00				13.56		12	5								
Rock Island	US 67	60.36	4TH Ave and 15th St	Right	R2-1 (30)	30	36	7.50						11	5								
Rock Island	US 150	0.67	South of US 6	Right	DSPC	30	30	6.25								16							
					M6-1R	21	15	2.19															
Rock Island	US 150	1.00	South of 78th Ave	Right	M1-I200	18	18	2.25						10	5								
					M1-I200	18	18	2.25															
Rock Island	US 150	1.80	South of 78th Ave	Left	D2-2	72	30		15.00					20	10					MOLINE 7 ROCK ISLAND 10			
Rock Island	US 150	2.17	South of 78th Ave	Left	W2-2R	36	36	9.00								16							
					W17-I100	36	9	2.25															86TH AVE
Rock Island	US 150	2.30	South of 3rd St	Left	DSPC	30	24	5.00								16							
					M6-1L	21	15	2.19															ARROWHEAD RANCH
Rock Island	US 150	2.30	South of 3rd St	Right	R2-1(35)	30	36	7.50						11	5								
Rock Island	US 150	2.33	South of 3rd St	Right	R3-9B	24	36	6.00		7.5				11	5								

MODEL: Default  
 FILE NAME: S:\PRG\GIS\Contractor - for - Letting\Signage - Contracts\642164R21 - CAD - shs.dgn

USER NAME = dit/lersa	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100 0000' / in	CHECKED - _____	REVISED - _____
PLOT DATE = Apr-28-2021 09:11:46 AM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

<b>SCHEDULE OF QUANTITIES</b>	
SCALE: _____	SHEET _____ OF _____ SHEETS STA _____ TO STA _____

F.A. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 5G 2022-1	VARIOUS	31	11
			CONTRACT NO. 64R21	
ILLINOIS FED. AID PROJECT				

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Rock Island	US 150	2.48	South of 1st St	Left	R3-9B	24	36	6.00		7.5				11	5					
Rock Island	US 150	2.52	South of 2nd St	Right	W2-2R	36	36	9.00								16				
					W17-1100	36	9	2.25												3rd st
Rock Island	US 150	2.52	South of 2nd St	Right	W17-1100	36	9	2.25												1st st
Rock Island	US 150	2.62	3rd St	Left	W1-7	48	24	8.00								14				
Rock Island	IL 5	0.05	east of US 67	Right	R2-1(30)	30	36	7.50								14				
Rock Island	IL 5	0.20	east of US 67	Right	R2-1(30)	30	36	7.50								14				
Rock Island	IL 5	0.33	east of US 67	Left	R2-1(30)	30	36	7.50								14				
Rock Island	IL 5	0.68	east of US 67	Left	R2-1(40)	30	36	7.50								16				
Rock Island	IL 5	0.68	east of US 67	Right	R2-1(40)	30	36	7.50								16				
Rock Island	IL 5	1.00	East of 24th St	Right	R2-1(45)	30	36	7.50		7.5						14				
					M1-1200	18	18	2.25												1
					M1-1200	18	18	2.25												1
Rock Island	IL 5	1.06	East of 24th St	Left	W3-3	36	36	9.00								18				
					W17-1100	36	9	2.25												24th St
Rock Island	IL 5	1.11	East of 24th St	Right	R3-9B	24	36	6.00						10	5					
Rock Island	IL 5	1.18	East of 24th St	Left	W9-1R	48	48			16										Remove sign and post
Rock Island	IL 5	1.27	East of 24th St	Left	WSPC	48	48		16.00		16									RIGHT LANE MUST TURN RIGHT
Rock Island	IL 5	1.30	East of 24th St	Left	R2-1 (45)	30	36	7.50						10	5					
Rock Island	IL 5	1.32	East of 24th St	Right	W3-3	36	36	9.00								18				
					W17-1100	36	9	2.25												30th St
Rock Island	IL 5	1.45	East of 24th St	Right	R2-1 (45)	30	36	7.50						10	5					
Rock Island	IL 5	1.50	East of 24th St	Left	W3-3	36	36	9.00								18				
					W17-1100	36	9	2.25												30th St
Rock Island	IL 5	1.78	Between 24th and 30th	Right	W3-3	36	36	9.00		7.5			12.5			28				
					W17-1100	36	9	2.25												38th St
Rock Island	IL 5	1.84	Between 24th and 30th	Left	R3-9B	24	36	6.00						10	5					

M0911\_Permit.dwg  
 FILE NAME: S:\18\Contract\45\Contract\45\_18\1821\64R21\_CADD\45.dwg

USER NAME = dglzlera	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100.0000' / in	CHECKED - _____	REVISED - _____
PLOT DATE = Apr-28-2021 09:11:50 AM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**SCHEDULE OF QUANTITIES**

SCALE: \_\_\_\_\_ SHEET \_\_\_\_\_ OF \_\_\_\_\_ SHEETS STA \_\_\_\_\_ TO STA \_\_\_\_\_

F.A. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2022-1	VARIOUS	31	12
			CONTRACT NO. 64R21	
ILLINOIS FED. AID PROJECT				

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Rock Island	IL 5	1.86	Between 24th and 30th	Left	R2-1 (45)	30	36	7.50						10	5					
Rock Island	IL 5	1.95	Between 30th and 38th	Right	R2-1 (45)	30	36	7.50				6		10	5					
Rock Island	IL 5	2.00	Between 30th and 38th	Right	M1-I200	18	18	2.25						8	5					2
Rock Island	IL 5	2.00	Between 30th and 44th	Left	W3-3	36	36	9.00		7.5	15		12.5			28				
					W17-I100	36	9	2.25												38th St
					M1-I200	18	18	2.25												
Rock Island	IL 5	2.19	Between 30th and 44th	Right	W3-3	36	36	9.00			10					16				
					W17-I100	36	9	2.25												44th St
Rock Island	IL 5	2.33	Between 44th and Valley View	Left	DSPC	30	30	6.25												DEPT OF HUMAN SERVICES
					M6-1L	21	15	2.19												
Rock Island	IL 5	2.19	Between 44th and Valley View	Left	W3-3	36	36	9.00								16				
					W17-I100	36	9	2.25												44th St
Rock Island	IL 5	2.35	Between 44th and Valley View	Right	R2-1 (45)	30	36	7.50						10	5					
Rock Island	IL 5	2.46	Btwn Valley View & Milan Beltway	Left	R2-1(45)	30	36	7.50						10	5					
Rock Island	IL 5	2.48	Btwn Valley View & Milan Beltway	Left	W3-3	36	36	9.00								16				
					W17-I100	36	15	3.75												Valley View Dr
Rock Island	IL 5	2.49	Btwn Valley View & Milan Beltway	Left	M3-4	24	12	2.00						9	5					IL 5
					M1-I100	24	24	4.00												
Rock Island	IL 5	2.51	At Milan Beltway Interchange	Median	R3-2	30	30	6.25												
Rock Island	IL 5	2.51	At Milan Beltway Interchange	Left	R5-1A	42	30	8.75								1				east side of the ramp
Rock Island	IL 5	2.51	At Milan Beltway Interchange	Left	R5-1	48	48		16.00							14				east side of the ramp Red strip on the post
						2	48	0.67												
Rock Island	IL 5	2.53	At Milan Beltway Interchange	Left	R3-1	30	30	6.25												1
					R3-2	30	30	6.25												1
Rock Island	IL 5	2.68	WB IL 5 Ramp to WB IL 5	Left	W3-3	36	36	9.00								16				
Rock Island	IL 5	2.74	WB IL 5 Ramp to WB IL 5 Gore	Left	M3-4	36	18	4.50								16				
					M1-I100	36	36	9.00												IL 5
					M6-2R	30	18	3.75												
Rock Island	IL 5	2.87	Between RI Milan Beltway & 7th	Right	W3-3	48	48		16.00							18				
					W17-I100	48	12	4.00												7th St

MODEL Path: S:\VRC\Contract\64R21\64R21\_CADD\_sbs.dgn  
 FILE NAME: S:\VRC\Contract\64R21\64R21\_CADD\_sbs.dgn

USER NAME = ditzlersa	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100.0000 / in.	CHECKED - _____	REVISED - _____
PLOT DATE = Apr-28-2021 09:11:57 AM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

<b>SCHEDULE OF QUANTITIES</b>	
SCALE: _____	SHEET _____ OF _____ SHEETS
STA. _____	TO STA. _____

FA RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2022-1	VARIOUS	31	13
CONTRACT NO. 64R21				
ILLINOIS FED. AID PROJECT				

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Rock Island	IL 5	3.00	Between RI Milan Beltway & 7th	Right	M1-I200	18	18	2.25						8	5					3
Rock Island	IL 5	3.00	Between RI Milan Beltway & 7th	Left	R2-1(45)	36	48		12.00							18				3
					M1-I200	18	18	2.25												
Rock Island	IL 5	3.02	Between RI Milan Beltway & 7th	Left	M3-4	24	12	2.00						11	5					IL 5
					M1-I100	24	24	4.00												
Rock Island	IL 5	3.04	At 7th St	Median	OM3	12	36	3.00								1				
Rock Island	IL 5	3.46	Between 7th & 16th	Right	R2-1(45)	36	48		12.00	7.5						18				
Rock Island	IL 5	3.50	Between 7th & 16th	Left	R2-1(45)	36	48		12.00	7.5						18				
Rock Island	IL 5	3.84	Between 7th & 16th	Right	R2-1(45)	36	48		12.00							18				
Rock Island	IL 5	3.99	Between 7th & 16th	Right	M1-I200	18	18	2.25				8	16			20				4
Rock Island	IL 5	4.00	Between 7th & 16th	Left	M1-I200	18	18	2.25						8	5					4
Rock Island	IL 5	4.14	At 16th St	Right	M4-5	24	12	2.00												
					M1-1	24	24	4.00												74
					M6-3	21	15	2.19												
Rock Island	IL 5	4.39	Between 16th and I-74	Left	R2-1(45)	36	48		12.00							18				
Rock Island	IL 5	4.49	Between 16th and I-74	Left	M3-4	24	12	2.00				5				18				IL 5
					M1-I100	24	24	4.00												
Rock Island	IL 5	4.47	Between 16th and I-74	Right	M4-5	24	12	2.00								16				280
					M1-1	30	24	5.00												
					M5-2R	21	15	2.19												
Rock Island	IL 5	4.62	Between 16th and I-74	Right	M3-2	24	12	2.00								16				74
					M1-1	24	24	4.00												
					M6-2R	21	15	2.19												
					M3-2	24	12	2.00												
					M1-1	24	24	4.00												
					M6-2R	21	15	2.19												6
Rock Island	IL 5	4.62	Between 16th and I-74	Right	M4-5	24	12	2.00								16				280
					M1-1	30	24	5.00												
					M6-2R	21	15	2.19												
Rock Island	IL 5	4.65	Between 16th and I-74	Left	W4-3R	48	48		16.00		16									
Rock Island	IL 5	4.70	Between 16th and I-74	Right	R2-1(45)	36	48		12.00							18				

MDPF: Rock Island  
 FILE NAME: S:\TRC\Contract\164821\64821\_CADD\_shts.dwg

USER NAME = dizlersa	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100.0000 / in	CHECKED - _____	REVISED - _____
PLOT DATE = Apr-28-2021 09:12:02 AM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**

<b>SCHEDULE OF QUANTITIES</b>	
SCALE: _____	SHEET _____ OF _____ SHEETS STA _____ TO STA _____

F.A. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2022-1	VARIOUS	31	14
			CONTRACT NO. 64R21	
ILLINOIS FED. AID PROJECT				

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes				
Rock Island	IL 5	4.71	Between 16th and I-74	Left	M3-2	24	12	2.00								16								
					M1-1	24	24	4.00															74	
					M6-2R	21	15	2.19																
					M3-2	24	12	2.00																
					M1-1	24	24	4.00																
Rock Island	IL 5	4.62	Between 16th and I-74	Right	M4-5	24	12	2.00								16								
					M1-1	30	24	5.00															280	
					M6-2R	21	15	2.19																
Rock Island	IL 5	4.86	East of I-74	Right	M3-4	24	12	2.00								16								
					M1-1	24	24	4.00															74	
					M6-2R	21	15	2.19																
					M3-4	24	12	2.00																
					M1-1	24	24	4.00																
Rock Island	IL 5	4.91	East of I-74	Left	R2-1(45)	36	48		12.00							18								
Rock Island	IL 5	4.95	East of I-74	Left	M3-4	24	12	2.00								16								
					M1-1	24	24	4.00															74	
					M6-2R	21	15	2.19																
					M3-4	24	12	2.00																
					M1-1	24	24	4.00																
Rock Island	IL 5	5.00	East of I-74	Right	M1-I200	18	18	2.25						8	5						5			
Rock Island	IL 5	5.00	East of I-74	Left	M1-I200	18	18	2.25						8	5						5			
Rock Island	IL 5	5.03	East of I-74	Right	M3-2	24	12	2.00								18								
					M1-I100	24	24	4.00																
					MSPC	24	30	5.00																
Rock Island	IL 5	5.06	East of I-74	Right	R2-1(45)	36	48		12.00							18								
Rock Island	IL 5	6.00	Between 41st and 53rd	Right	R2-1(45)	36	48		12.00							16					6			
					M1-I200	18	18	2.25																
Rock Island	IL 5	6.00	Between 41st and 53rd	Left	M1-I200	18	18	2.25													6			
Rock Island	IL 5	7.00	Between 60th and 70th	Right	M1-I200	18	18	2.25						9	5						7			
Rock Island	IL 5	7.00	Between 60th and 70th	Left	M1-I200	18	18	2.25													7			
Rock Island	IL 5	7.03	Between 60th and 70th	Right	R6-1R	36	12	3.00				6.25												

MODFL: Default  
 FILE NAME: S:\TR\Contract35\Contract35\64R21\64R21\_CAD\0\_Shts.dwg

USER NAME = ditzler	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100.0000 / in	CHECKED - _____	REVISED - _____
PLOT DATE = Apr-28-2021 09:12:07 AM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**

<b>SCHEDULE OF QUANTITIES</b>	
SCALE: _____	SHEET _____ OF _____ SHEETS STA _____ TO STA: _____

F.A. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2022-1	VARIOUS	31	15
CONTRACT NO. 64R21				
ILLINOIS FED. AID PROJECT				

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Rock Island	IL 5	7.04	Between 60th and 70th	Median	R6-1R	36	12	3.00						8	5					
Rock Island	IL 5	7.07	Between 60th and 70th	Median	R6-1R	36	12	3.00						8	5					
Rock Island	IL 5	7.17	Between 60th and 70th	Right	M4-5	24	12	2.00								16				
					M1-1	24	24	4.00												80
					M1-1	24	24	4.00												88
					M6-3	21	15	2.19												
Rock Island	IL 5	7.19	Between 60th and 70th	Median	R3-I100	24	24	4.00						9	5					
Rock Island	IL 5	7.27	Between 60th and 70th	Median	R3-I100	24	24	4.00						8			1			
					M6-2L	21	15	2.19												
Rock Island	IL 5	7.38	Between 70th and John Deere Pl	Median	R3-I100	24	24	4.00						8	5					
					M6-2L	21	15	2.19												
Rock Island	IL 5	7.46	Between 70th and John Deere Pl	Median	R3-I100	24	24	4.00						9	5					
Rock Island	IL 5	7.58	Between 70th and John Deere Pl	Right	W3-3	48	48		16.00							18				
					W17-I100	48	12	4.00												70th St
Rock Island	IL 5	8.00	Between 70th and John Deere Pl	Right	M1-I200	18	18	2.25						9	5					8
Rock Island	IL 5	8.00	Between 70th and John Deere Pl	Left	M1-I200	18	18	2.25						9	5					8
Rock Island	IL 5	9.00	Btwn John Deer Pl & Ave of the Cities	Right	M1-I200	18	18	2.25						9	5					9
Rock Island	IL 5	9.00	Btwn John Deer Pl & Ave of the Cities	Left	M1-I200	18	18	2.25						9	5					9
Rock Island	IL 5	9.03	Btwn John Deer Pl & Ave of the Cities	Median	R3-4	36	36	9.00								18				
					R3-I101	36	24	6.00												
					R3-4	36	36	9.00												
					R3-I101	36	24	6.00												
Rock Island	IL 5	9.32	Btwn John Deer Pl & Ave of the Cities	Right	W1-2L	48	48		16.00							18				
Rock Island	IL 5	9.51	At John Deere Parkway	Median	R6-1L	36	12	3.00						10	5					
					R1-2	36	36	9.00												
Rock Island	IL 5	9.51	At John Deere Parkway	Median	R6-1L	36	12	3.00						10	5					
					R1-2	36	36	9.00												
Rock Island	IL 5	9.92	Btwn John Deer Pl & Ave of the Cities	Right	W17-I100	48	12	4.00												COLONA RD ->
Rock Island	IL 5	10.00	Btwn John Deer Pl & Ave of the Cities	Right	M1-I200	18	18	2.25						9	5					10
Rock Island	IL 5	10.00	Btwn John Deer Pl & Ave of the Cities	Left	M1-I200	18	18	2.25												10

MOBILE: Perdue  
 FILE NAME: S:\Data\Contract\Contract\_6421\6421\_6421.dwg

USER NAME = dizlersa	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100 0000' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = Apr-28-2021 09:12:11 AM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**SCHEDULE OF QUANTITIES**

SCALE: \_\_\_\_\_ SHEET \_\_\_\_\_ OF \_\_\_\_\_ SHEETS STA \_\_\_\_\_ TO STA \_\_\_\_\_

FA RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 5G 2022-1	VARIOUS	31	16
CONTRACT NO. 6421			ILLINOIS FED. AID PROJECT	



# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Rock Island	IL 5	10.13	Btwn Ave of the Cities & Crosstown	Median	R4-7	24	30	5.00						8	5					
Rock Island	IL 5	10.23	Btwn Ave of the Cities & Crosstown	Median	R6-1R	36	12	3.00						8	5					
Rock Island	IL 5	10.78	At 16th	Left	R4-7	24	30	5.00						8	5					
Rock Island	IL 5	11.00	Btwn Crosstown Ave & IL 84	Right	M1-I200	18	18	2.25						9	5					11
Rock Island	IL 5	11.00	Btwn Crosstown Ave & IL 84	Left	M1-I200	18	18	2.25						9	5					11
Rock Island	IL 5	11.34	Btwn Crosstown Ave & IL 84	Left	M3-4	24	12	2.00						10	5					5
					M1-I100	24	24	4.00												5
Rock Island	IL 5	11.37	Btwn Crosstown Ave & IL 84	Right	M3-2	24	12	2.00								16				
					M1-I100	24	24	4.00												92
					M6-3	21	15	2.19												
Rock Island	IL 5	12.00	Between IL 84 and Barstow	Right	M1-I200	18	18	2.25						9	5					12
Rock Island	IL 5	12.00	Between IL 84 and Barstow	Left	M1-I200	18	18	2.25						9	5					12
Rock Island	IL 5	12.09	Between IL 84 and Barstow	Left	M3-3	24	12	2.00								16				
					M1-I100	24	24	4.00												84
					M6-3	21	15	2.19												
Rock Island	IL 5	12.09	Between IL 84 and Barstow	Left	M3-1	24	12	2.00								16				
					M1-I100	24	24	4.00												84
					M5-2R	21	15	2.19												
					M3-4	24	12	2.00												
					M1-I100	24	24	4.00												92
Rock Island	IL 5	12.09	Between IL 84 and Barstow	Right	W2-2R	48	48		16.00							18				
					W17-I100	48	12	4.00												BRAKESHOE CT
Rock Island	IL 5	12.45	Between Barstow and I-80	Right	R2-1(55)	36	48		12.00							18				
Rock Island	IL 5	13.00	Between Barstow and I-80	Right	M1-I200	18	18	2.25						9	5					13
Rock Island	IL 5	13.00	Between Barstow and I-80	Left	M1-I200	18	18	2.25						9	5					13
Rock Island	IL 5	13.26	Between Barstow and I-80	Median	R5-1	36	36	9.00						9	5					
Rock Island	IL 5	14.00	Between Barstow and I-80	Right	M1-I200	18	18	2.25		2.25				9	5					14
Rock Island	IL 5	14.00	Between Barstow and I-80	Left	M1-I200	18	18	2.25						9	5					14
Rock Island	IL 5	15.00	Between Barstow and I-80	Right	M1-I200	18	18	2.25						9	5					15

MODEL: P:\proj\...  
 FILE NAME: S:\TRAC\contracts\for\letting\supp\supp\Contract\64R21\64R21\_C600.xls.dwg

USER NAME = ditzler	DESIGNED -	REVISED -
PLOT SCALE = 100.0000 1/4 in.	DRAWN -	REVISED -
PLOT DATE = Apr-28-2021 09:12:17 AM	CHECKED -	REVISED -
	DATE -	REVISED -

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**

<b>SCHEDULE OF QUANTITIES</b>			
SCALE: _____	SHEET _____ OF _____ SHEETS	STA _____ TO STA _____	

F.A. RATE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2022-1	VARIOUS	31	17
CONTRACT NO. 64R21				
ILLINOIS FED. AID PROJECT				

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood	banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Rock Island	IL 5	15.00	Between Barstow and I-80	Left	M1-I200	18	18	2.25		2.25				9	5						15
Rock Island	IL 84	0.70	Between Colona Rd and the Rock R.	Left	R2-1 (55)	30	36	7.50								16					
Rock Island	IL 84	1.00	Between Colona Rd and IL 5	Right	M1-I200	18	18	2.25						9	5						1
					M1-I200	18	18	2.25													1
Rock Island	IL 84	2.00	Between Colona Rd and IL 5	Right	M1-I200	18	18	2.25						9	5						2
					M1-I200	18	18	2.25													2
Rock Island	IL 84	2.36	Between Colona Rd and IL 5	Right	M4-5	24	12	2.00								16					
					M1-1	24	24	4.00													80
					M1-1	24	24	4.00													88
					M5-1L	21	15	2.19													
Rock Island	IL 84	2.40	Between Colona Rd and IL 5	Right	D1-1	48	18	6.00								14					<- Dixon
Rock Island	IL 84	2.53	Between Colona Rd and IL 5	Right	M4-5	24	12	2.00								16					
					M1-1	24	24	4.00													80
					M1-1	24	24	4.00													88
					M6-1L	21	15	2.19													
Rock Island	IL 84	2.53	Between Colona Rd and IL 5	Median	R4-7	24	30	5.00						8				1			
					R3-4	24	24	4.00													
Rock Island	IL 84	2.57	At IL 5	Right	R2-1 (45)	30	36	7.50				12				14					
Rock Island	IL 84	2.59	At IL 5	Right	M3-4	24	12	2.00						11	5						
					M1-I100	24	24	4.00													5
					MSCP	21	15	2.19													LEFT LANE
Rock Island	IL 84	2.77	At IL 5	Right	D1-2	60	30		12.50							14					<- Moline <- Rock Island
Rock Island	IL 84	2.79	At IL 5	Median	M3-4	24	12	2.00						10				1			
					M1-I100	24	24	4.00													5
					M6-1L	21	15	2.19													
					OM3	12	36	3.00													
Rock Island	IL 84	2.89	North of IL 5	Left	D1-2	60	30		12.50							14					Moline -> Rock Island ->
Rock Island	IL 84	3.41	Between 9th and 10th	Right	R2-1 (30)	30	36	7.50				1.5		12	5						
Rock Island	IL 84	3.41	Between 9th and 10th	Left	R2-1 (30)	30	36	7.50				1.5		12	5						
Rock Island	IL 84	3.84	Between 3rd and 4th	Right	R2-1 (30)	30	36	7.50				1.5		12	5						

MODEL Path: C:\Users\jgibson\OneDrive\Documents\64R21\64R21.dgn  
 FILE NAME: S:\TR\Contract\64R21\64R21.dgn

USER NAME = ditz/ersa	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE = 100.0000 / in.	CHECKED -	REVISED -
PLOT DATE = Apr-28-2021 09:12:21 AM	DATE -	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**SCHEDULE OF QUANTITIES**

SCALE: \_\_\_\_\_ SHEET \_\_\_\_\_ OF \_\_\_\_\_ SHEETS STA. \_\_\_\_\_ TO STA. \_\_\_\_\_

F.A. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2022-1	VARIOUS	31	18
CONTRACT NO. 64R21			ILLINOIS FED. AID PROJECT	

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes				
Rock Island	IL 84	4.01	North of IL 92	Left	M3-3	24	12	2.00								16								
					M1-I100	24	24	4.00															84	
					M1-6L	21	15	2.19																
					M1-I100	24	24	4.00																
					M6-4	21	15	2.19																
Rock Island	IL 84	4.32	North of IL 92	Right	W10-1	36	36	9.00								16								
Rock Island	IL 84	4.69	North of Morton Dr	Right	R2-1 (30)	30	36					7.5												
Rock Island	IL 84	5.84	North of East Moline	Left	D9-I102	48	30		10.00							14				State Police Headquarters 1/2 Mile				
Rock Island	IL 84	6.00	North of East Moline	Right	M1-I200	18	18	2.25						9	5						6			
					M1-I200	18	18	2.25															6	
Rock Island	IL 84	6.36	Hampton	Right	R2-1 (40)	30	36	7.50						10	5									
Rock Island	IL 84	6.36	Hampton	Left	R2-1 (50)	30	36	7.50						10	5									
Rock Island	IL 84	7.15	Hampton	Left	W11-2	36	36	9.00								16								
Rock Island	IL 84	9.60	Between Hamption and I-80	Left	R2-1 (50)	30	36	7.50								16								
Rock Island	IL 84	9.73	Between Hamption and I-80	Right	DSPC	72	42		21.00					24	10						Illinois Scenic Overlook Welcome Center ->			
Rock Island	IL 84	9.83	Near I-80	Left	R6-1L	36	12	3.00								1								
Rock Island	IL 84	10.00	Near I-80	Right	M1-I200	18	18	2.25						9	5						10			
Rock Island	IL 84	10.00	Near I-80	Left	M1-I200	18	18	2.25						9	5						10			
Rock Island	IL 84	10.09	Near I-80	Left	R6-1L	36	12	3.00								1								
Rock Island	IL 84	10.21	North of I-80	Left	W8-I108	36	36	9.00																
Rock Island	IL 84	10.34	North of I-80	Right	D4-I100	30	24	5.00		8														
					M6-1R	21	15	2.19																
Rock Island	IL 84	10.42	North of I-80	Left	D4-I100	30	24	5.00						10	5									
					M6-1L	21	15	2.19																
Rock Island	IL 84	12.17	Port Byron	Left	R2-1 (45)	30	36	7.50						10	5									
Rock Island	IL 84	12.51	Port Byron	Right	R2-1 (40)	30	36	7.50						10	5									
Rock Island	IL 84	12.74	Port Byron	Left	R2-1 (40)	30	36	7.50						10	5									

MODEL: D:\dwg\...  
 FILE NAME: S:\...  
 USER: ditzler  
 DATE: Apr-28-2021 09:12:26 AM

USER NAME = ditzler	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100,0000 / in.	CHECKED - _____	REVISED - _____
PLOT DATE = Apr-28-2021 09:12:26 AM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

<b>SCHEDULE OF QUANTITIES</b>			
SCALE: _____	SHEET _____	OF _____	SHEETS
STA _____	TO STA _____		

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2022-1	VARIOUS	31	19
			CONTRACT NO. 64R21	
ILLINOIS FED. AID PROJECT				

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Rock Island	IL 84	12.84	Port Byron	Right	R2-1 (40)	30	36			7.5										
Rock Island	IL 84	12.98	Port Byron	Left	R2-1 (30)	30	36	7.50		7.5		1.5		11	5					
Rock Island	IL 84	12.98	Port Byron	Right	R2-1 (30)	30	36	7.50		7.5								1		
Rock Island	IL 84	13.00	Port Byron	Right	M1-I200	18	18	2.25		1.5										13
					M1-I200	18	18	2.25												13
Rock Island	IL 84	13.36	Port Byron	Right	R2-1 (30)	30	36					7.5		10	5					
Rock Island	IL 84	13.52	Port Byron	Left	R2-1 (30)	30	36	7.50						10	5					
Rock Island	IL 84	13.91	Port Byron	Right	R2-1 (45)	30	36	7.50						10	5					
Rock Island	IL 84	15.74	Port Byron	Left	W14-3	64	48		10.67							16				
					M3-3	24	12	2.00												84
					M1-I100	24	24	4.00												84
Rock Island	IL 84	15.90	Between Port Byron and Cordova	Left	D9-I103	36	18	4.50						9	5					Camping (no arrow)
					M6-1R	21	15	2.19												
Rock Island	IL 84	17.45	Between Port Byron and Cordova	Left	W2-1	36	36	9.00								16				
					W17-I100	36	15	3.75												
Rock Island	IL 84	18.17	Cordova	Right	R2-1 (45)	30	36	7.50								16				
Rock Island	IL 84	18.17	Cordova	Left	R2-1 (45)	30	36	7.50								16				
Rock Island	IL 84	20.48	Between Cordova and Whiteside Co.	Right	R1-1	36	36	9.00						9	5					
Rock Island	IL 84	23.00	Between Cordova and Whiteside Co.	Right	M1-I200	18	18	2.25						9	5					23
					M1-I200	18	18	2.25												23
Rock Island	IL 84	24.82	Between Cordova and Whiteside Co.	Left	M3-3	24	12	2.00						9	5					84
					M1-I100	24	24	4.00												84
Rock Island	IL 84	24.86	Between Cordova and Whiteside Co.	Right	M3-1	24	12	2.00						9	5					84
					M1-I100	24	24	4.00												84
Rock Island	IL 92	33.41	Moline - 8th St	Right	R6-1L	36	12	3.00						9	5					
Rock Island	IL 92	33.53	Moline - Between 10th and 11th	Right	W1-3R	36	36	9.00								16				
Rock Island	IL 92	33.53	Moline - Between 10th and 11th	Left	W1-3R	36	36	9.00								16				
Rock Island	IL 92	33.64	Moline - Between 10th and 12th	Left	R2-1 (30)	30	36	7.50								16				

MODIFIED: Per: [unreadable] FILE NAME: C:\Users\Gardner\Documents\64R21\64R21\_CADD\64R21.dwg

USER NAME = ditz/ersa	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100 0000' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = Apr-28-2021 09:12:32 AM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

<b>SCHEDULE OF QUANTITIES</b>	
SCALE: _____	SHEET _____ OF _____ SHEETS STA. _____ TO STA. _____

F.A. _____	SECTION _____	COUNTY _____	TOTAL SHEETS _____	SHEET NO. _____
VAR _____	D2 SG 2022-1	VARIOUS	31	20
			CONTRACT NO. 64R21	
ILLINOIS FED. AID PROJECT				

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Rock Island	IL 92	33.64	Moline - Between 10th and 12th	Right	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	33.69	Moline - Between 10th and 12th	Right	W3-3	36	36	9.00								16				
Rock Island	IL 92	33.69	Moline - Between 10th and 12th	Left	W3-3	36	36	9.00								16				
Rock Island	IL 92	33.74	Moline - At 12th	Left	D3-3	48	24	8.00									1			
Rock Island	IL 92	33.79	Moline - Between 12th and 13th	Left	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	34.00	Moline - Between 15th and 19th	Left	R2-1 (30)	30	36	7.50									1			
Rock Island	IL 92	34.00	Moline - Between 15th and 19th	Left	R2-1 (30)	30	36	7.50						10			1			
Rock Island	IL 92	34.61	Moline - Between 23rd and 34th	Right	M3-2	24	12	2.00						11	5					
					M1-I100	24	24	4.00												92
Rock Island	IL 92	34.72	Moline - Between 23rd and 34th	Left	R2-1 (30)	30	36	7.50										1		
Rock Island	IL 92	34.72	Moline - Between 23rd and 34th	Right	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	34.95	Moline - Between 23rd and 34th	Left	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	34.95	Moline - Between 23rd and 34th	Right	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	35.20	Moline - Between 23rd and 34th	Left	R2-1 (35)	30	36	7.50						11	5					
Rock Island	IL 92	35.26	Moline - Between 23rd and 34th	Right	W1-2L	36	36	9.00								16				
Rock Island	IL 92	35.40	Moline - Between 23rd and 34th	Right	R2-1 (35)	30	36	7.50						11	5					
Rock Island	IL 92	35.40	Moline - Between 23rd and 34th	Left	R2-1 (35)	30	36	7.50						11	5					
Rock Island	IL 92	35.43	Moline - At 34th	Median	R5-1	36	36	9.00						11	5					
Rock Island	IL 92	35.43	Moline - At 34th	Right	R10-5	30	36	7.50									1			
Rock Island	IL 92	35.43	Moline - At 34th	Left	R10-5	30	36	7.50									1			
Rock Island	IL 92	35.43	Moline - At 34th	Left	R4-7	24	30	5.00						8			1			
Rock Island	IL 92	35.50	Moline - At 35th	Median	R3-2	24	24	4.00						8	5					
Rock Island	IL 92	35.52	Moline - At 5th Ave	Right	M3-2	24	12	2.00						11	5					
					M1-I100	24	24	4.00												
					M6-2L	21	15	2.19												

MODIFIED: Default  
 FILE NAME: S:\1313\Contracts\Contracts for Letting\Summary Contracts\64R21\64R21\_Calsh\_sch.qxd

USER NAME = dlj/ersa	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100.0000' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = Apr-28-2021 09:12:37 AM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

<b>SCHEDULE OF QUANTITIES</b>	
SCALE: _____	SHEET _____ OF _____ SHEETS STA. _____ TO STA. _____

F.A. RTF	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2022-1	VARIOUS	31	21
			CONTRACT NO. 64R21	
ILLINOIS FED. AID PROJECT				

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Rock Island	IL 92	35.54	Moline - Between 34th and 41st	Right	W6-2	36	36	9.00								16				
Rock Island	IL 92	35.62	Moline - Between 34th and 41st	Right	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	35.62	Moline - Between 34th and 41st	Right	W6-1	36	36	9.00								16				
Rock Island	IL 92	35.67	Moline - Between 34th and 41st	Left	R2-1 (35)	30	36	7.50						11	5					
Rock Island	IL 92	35.74	Moline - Between 34th and 41st	Left	W1-2L	36	36	9.00								16				
Rock Island	IL 92	36.05	Moline - Between 41st and 55th	Right	R2-1 (30)	30	36	7.50										1		
Rock Island	IL 92	36.23	Moline - Between 41st and 55th	Right	R2-1 (30)	30	36	7.50										1		
Rock Island	IL 92	36.23	Moline - Between 41st and 55th	Left	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	36.29	Moline - Between 41st and 55th	Right	M6-2L	21	15	2.19												
Rock Island	IL 92	36.41	Moline - Between 41st and 55th	Right	R2-1 (30)	30	36	7.50										1		
Rock Island	IL 92	36.23	Moline - Between 41st and 55th	Left	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	36.55	Moline - Between 41st and 55th	Left	R2-1 (30)	30	36	7.50										1		
Rock Island	IL 92	36.78	Moline - Between 41st and 55th	Right	R2-1 (30)	30	36	7.50										1		
Rock Island	IL 92	36.80	Moline - Between 41st and 55th	Right	W17-i100	36	15	3.75												55th Street / 1st Street
Rock Island	IL 92	36.92	Moline - At 55th	Left	R5-1	36	36	9.00						11	5					
Rock Island	IL 92	36.96	East Moline-Btwn 1st and Kennedy	Left	M3-2	24	12	2.00								16				
					M1-i100	24	24	4.00												92
					M3-1	24	12	2.00												
					XM-20	24	12	2.00												
					XM-2	24	24	4.00												
Rock Island	IL 92	37.00	East Moline-Btwn 1st and Kennedy	Right	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	37.12	East Moline-Btwn 1st and Kennedy	Right	R6-2L	24	30	5.00						11	5					
Rock Island	IL 92	37.21	East Moline-Btwn 1st and Kennedy	Left	R6-2R	24	30	5.00						11	5					
Rock Island	IL 92	37.22	East Moline-Btwn 1st and Kennedy	Right	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	37.22	East Moline-Btwn 1st and Kennedy	Left	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	37.25	East Moline-Btwn 1st and Kennedy	Right	R6-2L	24	30	5.00						11	5					

MODEL: D:\work\FILE NAME: S:\B\Contract\3\Contract\4\4821\4821\_640D\_310.dgn

USER NAME = dilfersa	DESIGNED - _____	REVISED - _____
PLOT SCALE = 100.0000' / in.	DRAWN - _____	REVISED - _____
PLOT DATE = Apr-28-2021 09:12:49 AM	CHECKED - _____	REVISED - _____
	DATE - _____	REVISED - _____

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**

<b>SCHEDULE OF QUANTITIES</b>	
SCALE: _____	SHEET _____ OF _____ SHEETS STA. _____ TO STA. _____

FA RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO
VAR	D2 SG 2022-1	VARIOUS	31	22
			CONTRACT NO. 64R21	
ILLINOIS FED. AID PROJECT				

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Rock Island	IL 92	37.68	East Moline-Btwn Kennedy & 13th	Left	R2-1 (30)	30	36	7.50										1		
Rock Island	IL 92	37.69	East Moline-Btwn Kennedy & 13th	Right	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	37.77	East Moline-At 7th	Right	R4-7	24	30	5.00						11	5					
Rock Island	IL 92	37.77	East Moline-At 7th	Left	R6-2R	24	30	5.00								1				
Rock Island	IL 92	37.79	East Moline-Btwn Kennedy & 13th	Right	M3-2	24	12	2.00						11	5					
					M1-I100	24	24	4.00												92
Rock Island	IL 92	37.86	East Moline-Btwn Kennedy & 13th	Left	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	37.86	East Moline-Btwn Kennedy & 13th	Right	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	37.91	East Moline-Btwn Kennedy & 13th	Right	M3-2	24	12	2.00						12	5					
					M1-I100	24	24	4.00												92
					M5-2L	21	15	2.19												
Rock Island	IL 92	37.97	East Moline-Btwn Kennedy & 13th	Left	W1-2L	36	36	9.00						12	5					
Rock Island	IL 92	37.98	East Moline-At 9th	Right	R6-2L	24	30	5.00						11	5					
Rock Island	IL 92	37.02	East Moline-At 10th	Left	R6-2R	24	30	5.00						11	5					
Rock Island	IL 92	38.03	East Moline-At 10th	Right	M3-2	24	12	2.00						12	5					
					M1-I100	24	24	4.00												92
					M6-2L	21	15	2.19												
Rock Island	IL 92	38.06	East Moline-Btwn Kennedy & 13th	Left	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	38.06	East Moline-Btwn Kennedy & 13th	Right	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	38.08	East Moline-At 10th	Right	R6-2L	24	30	5.00						11	5					
Rock Island	IL 92	38.19	East Moline-Btwn Kennedy & 13th	Left	W6-2	36	36	9.00												
Rock Island	IL 92	38.26	East Moline-Btwn Kennedy & 13th	Left	M3-4	24	12	2.00						12	5					
					M1-I100	24	24	4.00												92
					M6-2R	21	15	2.19												
Rock Island	IL 92	38.31	East Moline-Btwn Kennedy & 13th	Left	M3-4	24	12	2.00						12	5					
					M1-I100	24	24	4.00												92
					M5-2R	21	15	2.19												
Rock Island	IL 92	38.31	East Moline-Btwn Kennedy & 13th	Right	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	38.35	East Moline-Btwn Kennedy & 13th	Left	W6-1	36	36	9.00								16				

M:\011 - Default  
 FILE NAME: S:\13\Contract\Contractors for Letting\Signum Contract\6421\6421 - CAD - x111.dwg

USER NAME = dhl/teresa	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100.0000' / 1" = _____	CHECKED - _____	REVISED - _____
PLOT DATE = Apr-28-2021 09:12:58 AM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**

<b>SCHEDULE OF QUANTITIES</b>			
SCALE: _____	SHEET _____ OF _____ SHEETS	STA _____ TO STA _____	

F.A. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 5G 2022-1	VARIOUS	31	23
			CONTRACT NO. 64R21	
ILLINOIS FED. AID PROJECT				

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Rock Island	IL 92	38.36	East Moline-Btwn Kennedy & 13th	Left	R2-1 (30)	30	36	7.50										1		
Rock Island	IL 92	38.46	East Moline-Btwn 13th & IL 84	Right	R2-1 (30)	30	36	7.50										1		
Rock Island	IL 92	38.56	East Moline-Btwn 13th & IL 84	Left	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	38.66	East Moline-Btwn 13th & IL 84	Right	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	80.03	WB-East Moline-At 11th	Left	R6-2R	24	30	5.00						11	5					
Rock Island	IL 92	80.05	WB-East Moline-Btwn 11th and 10th	Right	R6-2L	24	30	5.00						11	5					
Rock Island	IL 92	80.11	WB-East Moline-Btwn 11th and 10th	Right	R2-1(30)	30	36	7.50						10			1			
Rock Island	IL 92	80.32	WB-East Moline-At 8th	Right	R6-1L	36	12	3.00		10	6.25									
					R6-1R	36	12	3.00												
Rock Island	IL 92	80.44	WB-East Moline-At 7th	Left	R6-2R	24	30	5.00									1			
					R6-2L	24	30	5.00									1			
Rock Island	IL 92	80.44	WB-East Moline-At 7th	Right	R4-7	24	30	5.00						11	5					
Rock Island	IL 92	80.46	WB-East Moline-Btwn 7th and 1st	Left	M3-4	24	12	2.00									16			
					M1-1100	24	24	4.00												92
					M3-3	24	12	2.00												
					XM-20	24	12	2.00												
					XM-2	24	24	4.00												
Rock Island	IL 92	80.48	WB-East Moline-Btwn 7th and 1st	Right	W16-9P	24	12	2.00												
Rock Island	IL 92	80.48	WB-East Moline-Btwn 7th and 1st	Left	S1-1	36	36	9.00						12	5					
					W16-9P	24	12	2.00												
Rock Island	IL 92	80.56	WB-East Moline-Btwn 7th and 1st	Left	M6-2R	21	15	2.19												
Rock Island	IL 92	80.56	WB-East Moline-Btwn 7th and 1st	Right	S1-1	36	36	9.00						12	5					
					M6-2L	21	15	2.19												
Rock Island	IL 92	80.71	WB-East Moline-Btwn 7th and 1st	Right	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	80.71	WB-East Moline-Btwn 7th and 1st	Left	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	80.83	WB-East Moline-At Kennedy Dr	Right	R6-2L	24	30	5.00										1		
Rock Island	IL 92	80.84	WB-East Moline-Btwn 7th and 1st	Right	M3-4	24	12	2.00						11	5					
					M1-1100	24	24	4.00												92

MO:\F:\Default\STATE\CONTRACTS\CONTRACTS FOR CONSTRUCTION\CONTRACTS\64R21\64R21\_0409.dwg

USER NAME - ditzlersa	DESIGNED -	REVISED -
	DRAWN -	REVISED -
PLOT SCALE - 100.0000' / in.	CHECKED -	REVISED -
PLOT DATE - Apr-28-2021 09:13:05 AM	DATE -	REVISED -

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**

**SCHEDULE OF QUANTITIES**  
 SCALE: \_\_\_\_\_ SHEET \_\_\_\_\_ OF \_\_\_\_\_ SHEETS STA. \_\_\_\_\_ TO STA. \_\_\_\_\_

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2022-1	VARIOUS	31	24
CONTRACT NO. 64R21				
ILLINOIS FED. AID PROJECT				



# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Rock Island	IL 92	80.86	WB-East Moline-Btwn 7th and 1st	Left	M3-4	24	12	2.00										1		
					M1-1100	24	24	4.00										1		92
Rock Island	IL 92	81.10	WB-East Moline-Btwn 7th and 1st	Right	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	81.10	WB-East Moline-Btwn 7th and 1st	Left	R2-1 (30)	30	36	7.50						11	5					
Rock Island	IL 92	81.12	WB-East Moline-Btwn 7th and 1st	Left	W3-3	36	36	9.00								16				
Rock Island	IL 92	81.16	WB-East Moline-Btwn 7th and 1st	Right	M3-4	24	12	2.00								16				
					M1-1100	24	24	4.00												92
					M5-2L	21	15	2.19												
Rock Island	IL 92	81.25	WB - East Moline - 1st	Right	R5-1	36	36	9.00												
Rock Island	IL 92	83.04	WB-Moline-Between 34th and 23rd	Right	R2-1 (35)	30	36	7.50						11	5					
Rock Island	IL 92	83.04	WB-Moline-Between 34th and 23rd	Left	R2-1 (35)	30	36	7.50						11	5					
Rock Island	IL 92	83.15	WB-Moline-Between 34th and 23rd	Right	W11-8	36	36	9.00								16				
Rock Island	IL 92	83.23	WB-Moline-Between 34th and 23rd	Right	R2-1 (35)	30	36	7.50						11	5					
Rock Island	IL 92	83.23	WB - Moline - At 27th	Right	R6-1L	36	12	3.00										1		
Rock Island	IL 92	83.35	WB - Moline - At 26th	Right	R6-1L	36	12	3.00										1		
Rock Island	IL 92	83.52	WB - Moline - At 24th	Right	R6-1L	36	12	3.00										1		
Rock Island	IL 92	83.58	WB-Moline-Between 34th and 23rd	Right	W17-1100	30	9	1.88		1.5										23rd St
Rock Island	IL 92	83.58	WB-Moline-Between 34th and 23rd	Left	W3-3	36	36	9.00								16				
					W17-1100	30	9	1.88												23rd St
Rock Island	IL 92	83.66	WB-Moline-At 23rd	Left	R4-7	24	30	5.00						9	5					
Rock Island	IL 92	83.66	WB-Moline-At 23rd	Right	R4-7	24	30	5.00						9	5					
Rock Island	IL 92	83.99	WB-Moline-Between 19th and 7th	Left	R3-7L	30	30	6.25											1	
Rock Island	IL 92	84.08	WB-Moline-Between 19th and 7th	Left	R3-7L	30	30	6.25											1	
Rock Island	IL 92	84.11	WB - Moline - At 17th	Left	R6-1L	36	12	3.00											1	
Rock Island	IL 92	84.11	WB-Moline-Between 19th and 7th	Left	R3-7L	30	30	6.25						11	5					

MODEL: D:\p1\p1.dwg  
 FILE NAME: S:\TR\Contract\64R21\64R21.dwg

USER NAME = dnl218	DESIGNED -	REVISED -
PLOT SCALE = 100.0000' / in.	DRAWN -	REVISED -
PLOT DATE = Apr-28-2021 09:13:11 AM	CHECKED -	REVISED -
	DATE -	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**SCHEDULE OF QUANTITIES**

SCALE: \_\_\_\_\_ SHEET \_\_\_\_\_ OF \_\_\_\_\_ SHEETS STA \_\_\_\_\_ TO STA \_\_\_\_\_

SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
D2 SG 2022-1	VARIOUS	31	25
CONTRACT NO. 64R21		ILLINOIS FED. AID PROJECT	

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Rock Island	IL 92	84.16	WB-Moline-Between 19th and 7th	Left	R3-7L	30	30	6.25								1				
Rock Island	IL 92	84.21	WB-Moline-Between 19th and 7th	Right	R2-1(30)	30	36	7.50						11	5					
Rock Island	IL 92	84.22	WB-Moline-Between 19th and 7th	Left	R2-1(30)	30	36	7.50								1				
Rock Island	IL 92	84.44	WB-Moline-Between 19th and 7th	Right	R2-1(30)	30	36	7.50						11	5					
Rock Island	IL 92	84.44	WB-Moline-Between 19th and 7th	Left	R2-1(30)	30	36	7.50								1				
Rock Island	IL 92	84.52	WB-Moline-Between 19th and 7th	Right	R6-1L	36	12	3.00						9	5					
Rock Island	IL 92	84.64	WB-Moline-At 10th	Right	R6-1R	36	12	3.00				6.25								
					R6-1L	36	12	3.00												
Rock Island	Airport Rd	0.30	Between US 67 and I-280	Right	R3-9B	24	36	6.00						11	5					
Rock Island	Airport Rd	0.38	Between US 67 and I-280	Left	R3-9B	24	36	6.00						11	5					
Rock Island	Airport Rd	0.62	Between US 67 and I-280	Right	D4-I100	30	24	5.00						11	5					
					M6-4	21	15	2.19												
Rock Island	Airport Rd	0.75	Between US 67 and I-280	Left	D4-I100	30	24	5.00						11	5					
					M6-4	21	15	2.19												
Rock Island	Airport Rd	0.83	Between US 67 and I-280	Right	M3-2	24	12	2.00								16				
					M3-4	24	12	2.00												
					M1-1	30	24	5.00												i-280
					M1-1	30	24	5.00												i-280
					M6-3	21	15	2.19												
					M5-1R	21	15	2.19												
Rock Island	Airport Rd	1.23	Between I-280 and 27th St	Left	M3-4	24	12	2.00								16				
					M3-2	24	12	2.00												
					M1-1	30	24	5.00												i-280
					M1-1	30	24	5.00												i-280
					M6-3	21	15	2.19												
					M5-1R	21	15	2.19												
Rock Island	Airport Rd	1.24	Between I-280 and 27th St	Right	D4-I100	30	24	5.00						11	5					
					M6-1L	21	15	2.19												
Rock Island	Airport Rd	1.26	Between I-280 and 27th St	Left	R2-1(45)	30	36	7.50						9	5					
Rock Island	Airport Rd	1.29	Between I-280 and 27th St	Left	M2-1	24	12	2.00						9	5					
					M1-1	30	24	5.00												
Rock Island	Airport Rd	1.35	Between I-280 and 27th St	Left	D4-I100	30	24	5.00						11	5					
					M6-1R	21	15	2.19												

MOPFI - Deloitte  
 FILE NAME: S:\Projects\Illinois\Contracts - Letting\Summary Contracts\64216421 CADP - sub-dfm

USER NAME = dlm/rsa	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100.0000' / in	CHECKED - _____	REVISED - _____
PLOT DATE = Apr-28-2021 09:13:15 AM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**

<b>SCHEDULE OF QUANTITIES</b>	
SCALE: _____	SHEET _____ OF _____ SHEETS STA _____ TO STA _____

FA RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2022-1	VARIOUS	31	26
CONTRACT NO. 64R21			ILLINOIS FED. AID PROJECT	

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Rock Island	Airport Rd	1.38	Between I-280 and 27th St	Right	W17-I100	48	24	8.00												Rock Island-Milan Pkwy
Rock Island	Airport Rd	1.52	Between I-280 and 27th St	Median	R4-7	24	30	5.00						8			1			
					R3-2	30	30	6.25												
Rock Island	Airport Rd	1.52	Between I-280 and 27th St	Left	R5-1	48	48		16.00							14				Red Strip
					RSPC	2	48	0.67												
Rock Island	Airport Rd	1.52	Between I-280 and 27th St	Right	D3-3	60	18	7.50												Airport Td
																	1			
Rock Island	Airport Rd	1.67	Between I-280 and 27th St	Median	R4-7	24	30	5.00						8						
Rock Island	Airport Rd	1.67	Between I-280 and 27th St	Median	R4-7	24	30	5.00						8						
Rock Island	Airport Rd	1.67	Between I-280 and 27th St	Right	R5-1	48	48		16.00											
Rock Island	Airport Rd	1.73	Between I-280 and 27th St	Median	R4-7	24	30	5.00						8						
Rock Island	Airport Rd	1.78	Between I-280 and 27th St	Left	W17-I100	48	24	8.00												Rock Island-Milan Pkwy
Rock Island	Airport Rd	1.85	Between I-280 and 27th St	Right	DSPC	30	30	6.25						11	5					State Highway Yard
					M6-1R	21	15	2.19												
Rock Island	Airport Rd	3.50	Between I-280 and 27th St	Right	R5-1	36	36	9.00												State Highway Yard
Rock Island	Airport Rd	3.51	Between I-280 and 27th St	Right	R3-7R	30	30	6.25						9	5					
Rock Island	27th St/19th	0.05	Between I-74 Stub and Airport Rd	Right	R2-1(45)	30	36	7.50						11	5					
Rock Island	27th St/19th	0.12	Between I-74 Stub and Airport Rd	Left	M3-4	24	12	2.00								16				
					M3-2	24	12	2.00												
					M1-4	24	24	4.00												6
					M1-4	24	24	4.00												6
					M5-1L	21	15	2.19												
					M6-3	21	15	2.19												
Rock Island	27th St/19th	0.12	Between I-74 Stub and Airport Rd	Left	M4-5	24	12	2.00								16				
					M1-1	24	24	4.00												
					M1-1	30	24	5.00												
					M5-1L	21	15	2.19												
Rock Island	27th St/19th	0.26	Between I-74 Stub and Airport Rd	Left	W1-6L	48	24	8.00								14				
Rock Island	27th St/19th	0.36	At Airport Rd	Left	R4-7	24	30	5.00						9	5					
Rock Island	27th St/19th	0.36	At Airport Rd	Median	R4-7	24	30	5.00						9						

MOFH: Default  
 FILE NAME: S:\TRA\Contract\Contract\Contract\164R21\64R21\_CANTD\_shty.dgn

USER NAME = ditzlersa	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 300.0000' / in	CHECKED - _____	REVISED - _____
PLOT DATE = Apr-28-2021 09:13:19 AM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

<b>SCHEDULE OF QUANTITIES</b>	
SCALE: _____	SHEET _____ OF _____ SHEETS
STA _____	TO STA _____

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2022-1	VARIOUS	31	27
			CONTRACT NO. 64R21	
ILLINOIS FED. AID PROJECT				



# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes		
Rock Island	19th E. Moline	0.03	Btwn IL 84/IL 92& Ave of the Cities	Right	M1-I100	24	24	4.00								16						
					M6-6R	21	15	2.19														
					M1-I100	24	24	4.00														
					M6-4	21	15	2.19														
Rock Island	19th E. Moline	0.95	Btwn IL 84/IL 92& Ave of the Cities	Right	R2-1(45)	30	36	7.50						11	5							
Rock Island	19th E. Moline	1.08	Btwn IL 84/IL 92& Ave of the Cities	Right	R3-9B	24	36	6.00						11	5							
Rock Island	19th E. Moline	1.16	Btwn IL 84/IL 92& Ave of the Cities	Left	R3-9B	24	36	6.00						11	5							
Rock Island	19th E. Moline	1.38	Btwn IL 84/IL 92& Ave of the Cities	Left	W9-1R	36	36	9.00								16						
Rock Island	19th E. Moline	1.38	Btwn IL 84/IL 92& Ave of the Cities	Median	R4-7	24	30	5.00						9	5							
Rock Island	19th E. Moline	1.56	Btwn IL 84/IL 92& Ave of the Cities	Median	R5-1	36	36	9.00						9	5							
Rock Island	Ave. of Cities	0.15	East Moline - 1st St	Median	R5-1	36	36	9.00						9	5							
Rock Island	Ave. of Cities	0.41	East Moline - East of Kennedy Dr	Median	R2-1(45)	30	36	7.50														
Rock Island	Ave. of Cities	0.41	East Moline - East of Kennedy Dr	Left	R2-1(45)	30	36	7.50						11	5							
Rock Island	Ave. of Cities	0.71	East Moline - East of Kennedy Dr	Left	R2-1(45)	30	36	7.50						11	5							
Rock Island	Ave. of Cities	1.42	East Moline - East of 11th St	Left	R2-1(45)	30	36	7.50						11	5							
Rock Island	Ave. of Cities	1.68	East Moline - Near 19th	Left	R3-7L	30	30	6.25						11	5							
Rock Island	Ave. of Cities	1.90	East Moline - Near 19th		R5-1	36	36	9.00						11	5							
					R3-3	24	24	4.00														
Rock Island	Ave. of Cities	1.90	East Moline - Near 19th		R3-3	24	24	4.00														
Rock Island	Ave. of Cities	2.08	East Moline - East of 19th	Right	W3-5 (35)	36	36	9.00								16						
Rock Island	Ave. of Cities	2.14	East Moline - East of 19th	Median	R4-7	24	30	5.00						9	5							
Rock Island	Ave. of Cities	2.14	East Moline - East of 19th	Right	D9-2	24	24	4.00								14						
					M6-1L	21	15	2.19														
					D9-I106	30	24	5.00														
					M6-1L	21	15	2.19														
Rock Island	S Frt Rd	0.10	East Moline - Ave of the Citites	Left	W8-I108	36	36	9.00							16							
Rock Island	S Frt Rd	0.79	East Moline - Ave of the Citites	Left	W1-6L	48	24	8.00							14							
Rock Island	S Frt Rd	0.79	East Moline - Ave of the Citites	Left	W1-6R	48	24	8.00							14							

MODIFI: Default  
 FILE NAME: S:\TR\Contract\Contracts for Letting\Signage\Contract\64R21\64R21\_CADD\_xls.dwg

USER NAME = dir/teresa	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100 0000' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = Apr-28-2021 09:13:27 AM	DATE - _____	REVISED - _____

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**

**SCHEDULE OF QUANTITIES**  
 SCALE: \_\_\_\_\_ SHEET \_\_\_\_\_ OF \_\_\_\_\_ SHEETS STA \_\_\_\_\_ TO STA \_\_\_\_\_

FA	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2022-1	VARIOUS	31	29
CONTRACT NO. 64R21				
ILLINOIS FED. AID PROJECT				

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes
Rock Island	S Frt Rd	0.88	East Moline - Ave of the Citites	Left	W1-6R	48	24	8.00								14				
Rock Island	S Frt Rd	1.19	East Moline - Ave of the Citites	Right	R2-1(35)	30	36	7.50						11	5					
Rock Island	N Frt Rd	0.17	East Moline - Ave of the Citites	Left	R2-1(35)	30	36	7.50						11	5					
Rock Island	N Frt Rd	0.53	East Moline - Ave of the Citites	Left	R2-1(35)	30	36	7.50						11	5					
Rock Island	N Frt Rd	1.03	East Moline - Ave of the Citites	Right	R2-1(35)	30	36	7.50						11	5					
Rock Island	N Frt Rd	1.53	East Moline - Ave of the Citites	Right	R2-1(45)	30	36	7.50						11	5					
Rock Island	Kennedy Dr	0.18	East Moline - Near Ave of the Citites	Left	W9-1R	36	36	9.00								16				
Rock Island	Kennedy Dr	0.19	East Moline - Near Ave of the Citites	Left	R1-1	36	36	9.00						11	5					
Rock Island	Colona Rd	0.03	East of Il 5	Right	M4-5	24	12	2.00						11	5					
					M1-1	24	24	4.00												
					M6-3	21	15	2.19												
Rock Island	Colona Rd	0.40	At Troy Dr	Median	OM3	12	36	3.00												
Rock Island	Colona Rd	0.40	At Troy Dr	Median	OM3	12	36	3.00												
Rock Island	John Deer Pl	0.03	At IL 5	Left	RSPC	30	36	7.50						9	5					Right Turn No Stop
Rock Island	John Deer Pl	0.10	North of IL 5	Right	R2-1(55)	30	36	7.50						9	5					
Rock Island	John Deer Pl	0.13	North of IL 5	Left	W17-I100	30	9	1.88												IL RTE 5
Rock Island	John Deer Pl	0.14	North of IL 5	Right	R3-7L	30	30	6.25		4										IL RTE 5
Rock Island	John Deer Pl	0.79	North of IL 5	Right	W17-I100	36	15	3.75												10TH / Coal Town Rd
Rock Island	John Deer Pl	0.89	North of IL 5	Left	R2-1(55)	30	36	7.50						9	5					
Rock Island	52nd Ave	0.07	East of Il 5	Left	R2-1(45)	30	36	7.50						9	5					
Rock Island	52nd Ave	0.16	East of Il 5	Right	R2-1(40)	30	36	7.50						9	5					
Rock Island	52nd Ave	0.36	East of Il 5	Median	R4-7	24	30	5.00						9	5					
Rock Island	52nd Ave	0.37	East of Il 5	Right	R3-7L	30	30	6.25						9	5					
Rock Island	52nd Ave	0.41	East of Il 5	Left	R2-1(40)	30	36	7.50						9	5					
Rock Island	Hillcrest Rd	0.02	West of US 67	Right	R2-1(30)	30	36	7.50												

MOFPI - Detail  
 FILE NAME: S:\11\Contract\5\Contract5\6421\6421\_CAD\03\_2021.dwg

USER NAME = dritersa	DESIGNED -	REVISED -
PLOT SCALE = 100.0000 / 1 in	DRAWN -	REVISED -
PLOT DATE = Apr-28-2021 09:13:32 AM	CHECKED -	REVISED -
	DATE -	REVISED -

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**

<b>SCHEDULE OF QUANTITIES</b>	
SCALE: _____	SHEET _____ OF _____ SHEETS STA. _____ TO STA. _____

FA RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D2 SG 2022-1	VARIOUS	31	30
CONTRACT NO. 64R21				
ILLINOIS FED. AID PROJECT				

# SCHEDULE OF QUANTITIES

County	Route	Mileage	Location	Side of Road	Sign	Size Hor	Size Ver	Install Type 1 (sf)	Install Type 2 (sf)	Remove Type 1 (sf)	Remove Type 2 (sf)	Relocate sign panel Ty 1(sf)	Relocate sign panel Ty 2(sf)	Total (2 in) Telspar	Total (2 1/4 in) Telspar	Wood banding	Neenah base	Lag to Utility Pole	Remove Existing Post	Other / Notes	
Rock Island	Hillcrest Rd	0.20	West of US 67	Right	R2-1(35)	30	36	7.50						11	5						
Rock Island	Hillcrest Rd	0.38	West of US 67	Left	W14-3	64	48		10.67							16					
Rock Island	Hillcrest Rd	0.44	West of US 67	Right	R2-1(35)	30	36	7.50						11	5						
Rock Island	Hillcrest Rd	0.69	West of US 67	Right	R2-1(35)	30	36	7.50						11	5						
Rock Island	Hillcrest Rd	0.75	West of US 67	Right	RSPC	24	30	5.00						10	5						No Truck Parking Between signs
Rock Island	Hillcrest Rd	0.83	West of US 67	Right	RSPC	24	30	5.00						10	5						No Truck Parking Between signs
Rock Island	Hillcrest Rd	0.93	West of US 67	Right	W14-3	48	36	6.00								16					
Rock Island	Hillcrest Rd	0.95	West of US 67	Right	W14-2	36	36	9.00								16					
Rock Island	Hillcrest Rd	1.05	West of US 67	Right	W8-I108	36	36	9.00								16					
Rock Island	Hillcrest Rd	1.08	West of US 67	Right	R2-1(35)	30	36	7.50						11	5						
Rock Island	Hillcrest Rd	1.10	West of US 67	Right	R7-1A	12	18	1.50						8	5						
Rock Island	Hillcrest Rd	1.12	West of US 67	Right	R7-1A	12	18	1.50						8	5						

MOD/FI: Deloitte  
 FILE NAME: S:\TR\Contract\Contracts for Letting\Supplying Contracts\64R21\64R21\_CADD\_3103.dgn

USER NAME = ditfersa PLOT SCALE = 100.0000 / in PLOT DATE = Apr-28-2021 09:13:37 AM	DESIGNED - _____ DRAWN - _____ CHECKED - _____ DATE - _____	REVISED - _____ REVISED - _____ REVISED - _____ REVISED - _____	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>SCHEDULE OF QUANTITIES</b>	F.A. RTE. _____ VAR. _____ SECTION _____ COUNTY _____ TOTAL SHEETS _____ SHEET NO. _____ CONTRACT NO. 64R21
SCALE: _____ SHEET _____ OF _____ SHEETS STA. _____ TO STA. _____			ILLINOIS FED. AID PROJECT		