

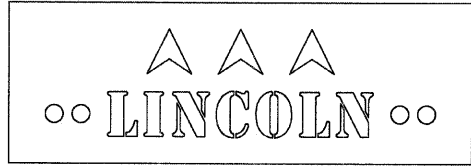
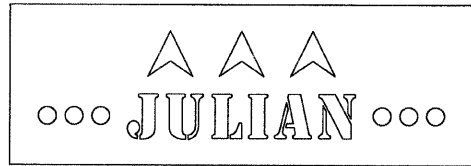
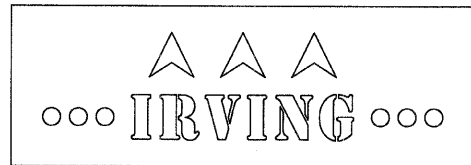
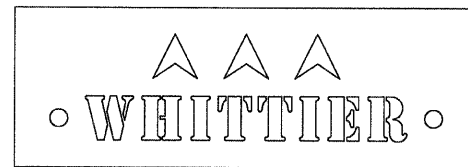
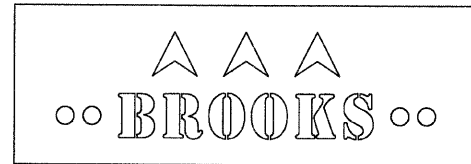
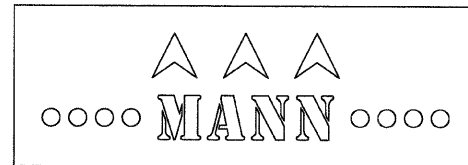


CONSTRUCTION DETAILS

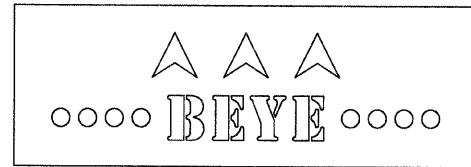

Cut out template along this line

18" x 52" dimensions shown. Areas to be cut out are indicated by arrows.

All stencil templates are 18' x 52' in size. Enlarging the PDF file drawings by a factor of six (6x) should result in full size templates of 18' x 52' in size.

The stencils shall be made from 1/8" thick polyvinyl material. Standard YELLOW paint, as used for pavement markings, shall be used to apply the stencils onto the surface of the concrete sidewalk.

The number of circles used in the templates vary from zero for Longfellow School to four for Beye School. Because the length of each school name varies, these circles are used as filler. Using the circles ensures that all of the school stencils as painted on the sidewalk are approximately 46 inches wide regardless of the length of the school name.

| | | |
|----------------------|--|--|
| Engineering Division | Scale: 1" = 6' By: MJK Date: 10/16/08 | TYPICAL STENCIL DESIGN FOR SCHOOL NAMES TO BE STENCILED ONTO SIDEWALK ALONG SAFE WALKING ROUTES TO SCHOOL. |
|----------------------|--|--|

N:\OakPark\080402\Civil\Exhibits\080402_cont_det.dgn

| | | | | | | | | | | | |
|---------------------------------|----------------------|------------|------------|----------------------------|-----------------------------|---------------------|------------------------|---|-----------------|--------------|--|
| FILE NAME = 080402_cont_det.dgn | USER NAME = MAGOLDEN | DESIGNED - | REVISED - | VILLAGE OF OAK PARK | CONSTRUCTION DETAILS | F.A. RTE. - | SECTION 07-00244-00-BT | COUNTY COOK | TOTAL SHEETS 30 | SHEET NO. 29 | |
| PLOT SCALE = NTS | CHECKED - LMF | DATE - | REVISED - | | | CONTRACT NO. 63180 | | | | | |
| PLOT DATE = 4/8/2009 | DATE - | REVISED - | SCALE: NTS | | | SHEET NO. OF SHEETS | STA. TO STA. | FED. ROAD DIST. NO. [ILLINOIS] FED. AID PROJECT | | | |
| | | | | | | | | | | | |