CULTRA DR.

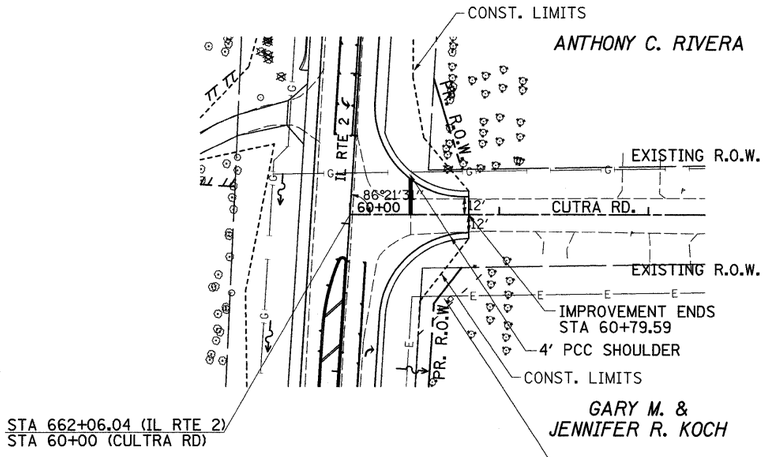

X - TREE REMOVAL

STRONGHOLD ENTRANCE & BOAT RAMP

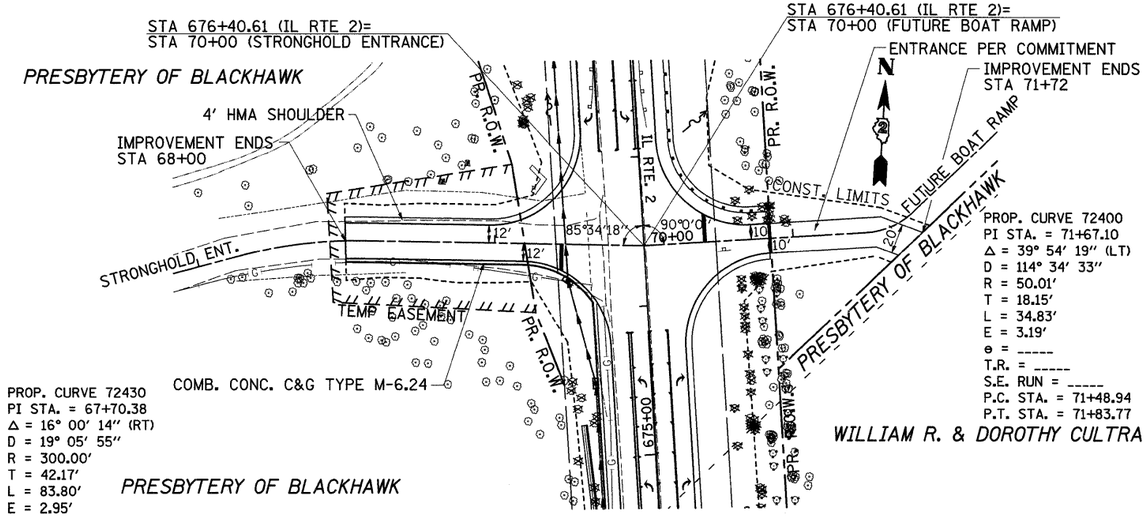

PROP. CURVE 72430
PI STA. = 67+70.38
Δ = 16° 00' 14" (RT)
D = 19° 05' 55"
R = 300.00'
T = 42.17'
L = 83.80'
E = 2.95'
e = -----
T.R. = -----
S.E. RUN = -----
P.C. STA. = 67+28.21
P.T. STA. = 68+12.00

PRESBYTERY OF BLACKHAWK

X - TREE REMOVAL

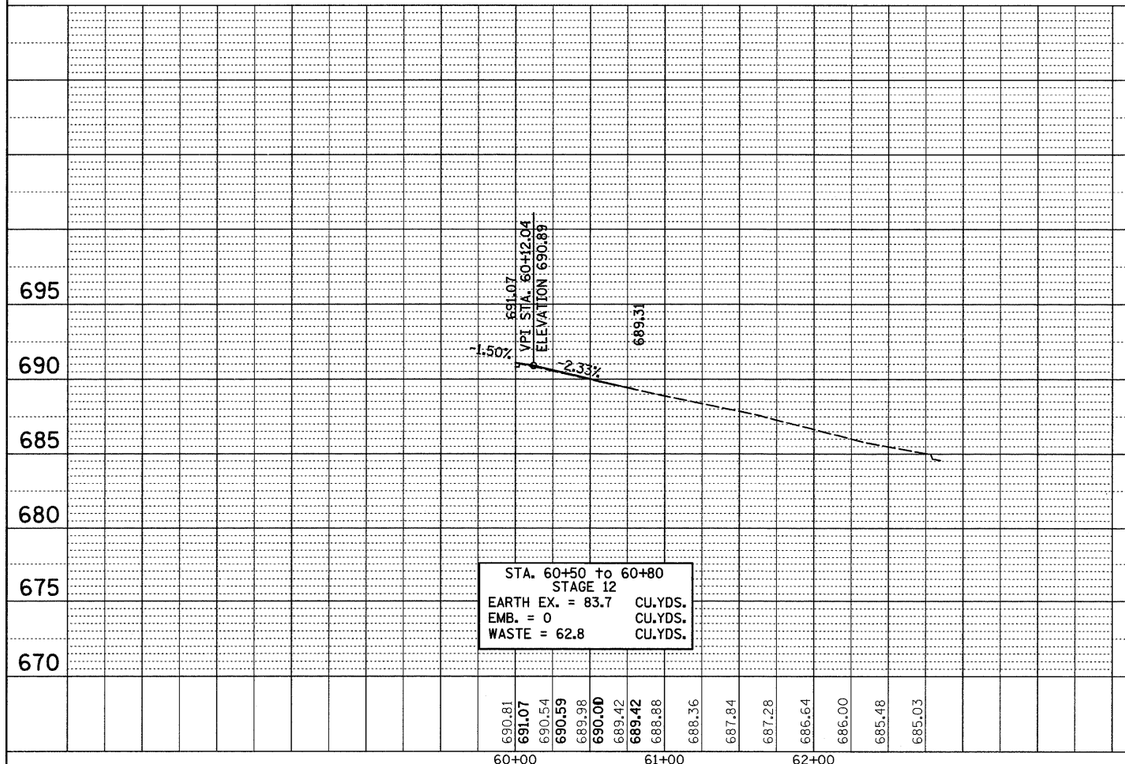

STA. 60+50 to 60+80
STAGE 12
EARTH EX. = 83.7 CU.YDS.
EMB. = 0 CU.YDS.
WASTE = 62.8 CU.YDS.

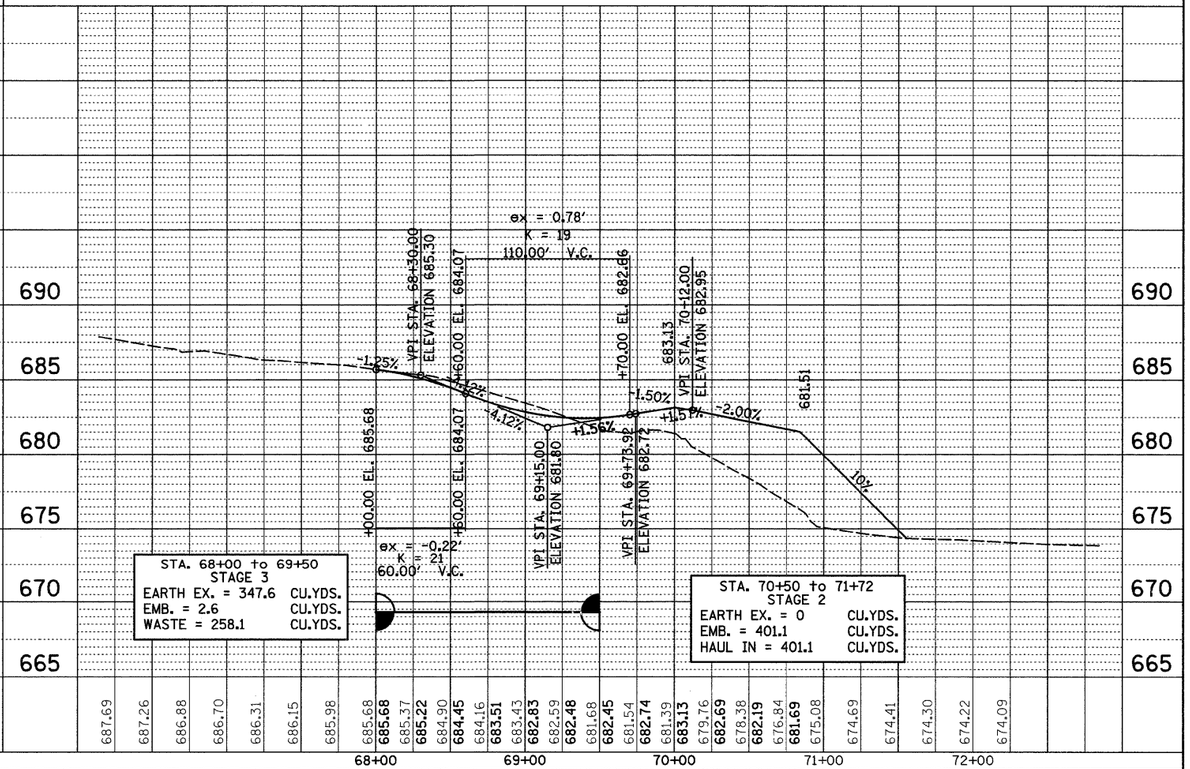

STA. 68+00 to 69+50
STAGE 3
EARTH EX. = 347.6 CU.YDS.
EMB. = 2.6 CU.YDS.
WASTE = 258.1 CU.YDS.

STA. 70+50 to 71+72
STAGE 2
EARTH EX. = 0 CU.YDS.
EMB. = 401.1 CU.YDS.
HAUL IN = 401.1 CU.YDS.

PLAN — SURVEYED ____ DATE; PLOTTED ____ BY; GRADES CHECKED ____; R.O.W. CHECKED ____; ALIGNMENT ____; RT. OF WAY CHECKED ____; CADD FILE NAME ____; NOTE BOOK ____; NO. ____

PROFILE — SURVEYED ____ DATE; PLOTTED ____ BY; GRADES CHECKED ____; R.W. NOTED ____; STRUCTURE NO(S)&TYPE(S) ____; NOTE BOOK ____; NO. ____

FILE NAME = c:\pw_work\PWIDOT\CUSHMANBW\dms34123\d0686pln3.dgn	USER NAME = cushmanbw	DESIGNED -	REVISED -
		DRAWN -	REVISED -
	PLOT SCALE = 50.0000 ' / IN.	CHECKED -	REVISED -
	PLOT DATE = Thu Apr 30 15:44:32 2009	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PLAN & PROFILE

SCALE: | SHEET NO. OF SHEETS | STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
742	37R-3	OGLE	345	66
		CONTRACT NO.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		