



STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

FOR INDEX OF SHEETS, SEE SHEET NO. 2
FOR SUMMARY OF QUANTITIES, SEE SHEET NO. 3-6

PROPOSED HIGHWAY PLANS

VARIOUS ROUTES
SECTION D5 GR & FENCE REPAIR 2027-1
MEDIAN CABLE, GUARDRAIL, FENCE REPAIR
VARIOUS COUNTIES

C-95-020-27

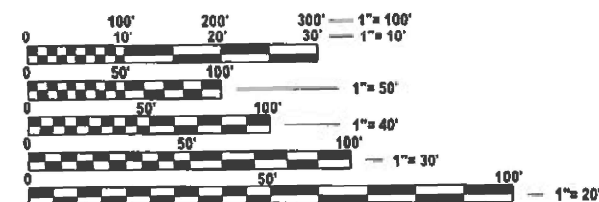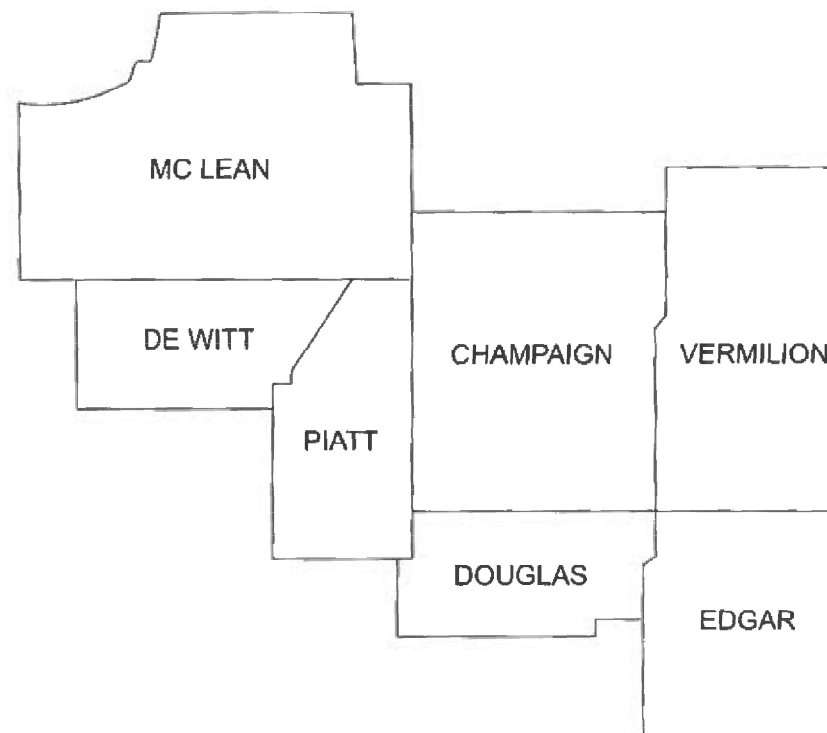


FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD
 ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT
 CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS
 ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER: RYAN CARROLL, P.E.
SQUAD LEADER: COEY HERRINGTON
PHONE NUMBER: 217-465-4181
CONTRACT NO. 70J06

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D5 GR & FENCE REPAIR 2027-1	VARIOUS	10	1
ILLINOIS CONTRACT NO. 70J06				

P-95-008-27

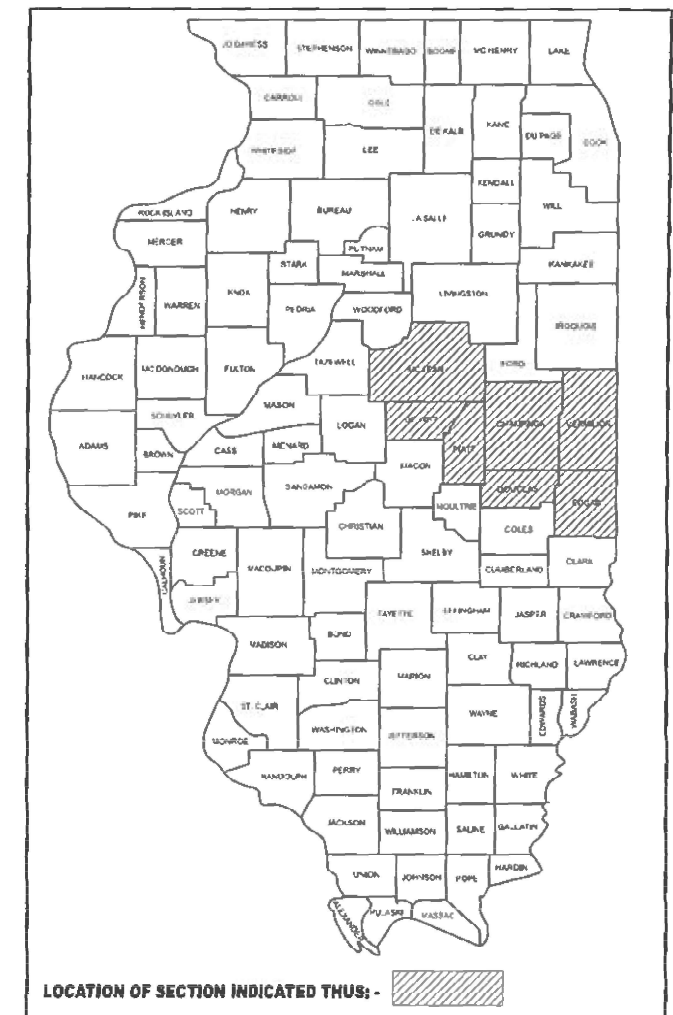

LOCATION OF SECTION INDICATED THUS: -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED 5/4 20 26
Kenneth A. Karpinski REGIONAL ENGINEER
 June 26 20 26
Scott A. Etkin ENGINEER OF DESIGN AND ENVIRONMENT
 June 26 20 26
John P. Barry DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

MODEL: Index of Sheets [Sheet]
FILE NAME: c:\pw\work\pw\herrington\id1208626\ID570J06-ahf-GenNote.dgn

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1	COVER SHEET
2	INDEX OF SHEETS
2	HIGHWAY STANDARDS
2	GENERAL NOTES
3-6	SUMMARY OF QUANTITIES
7-10	PLAN DETAILS

GENERAL NOTES

G.N.-100A
ELECTRONIC FILES AND/OR ELECTRONIC SURVEY INFORMATION INCLUDING CADD
FILES WILL NOT BE AVAILABLE TO THE CONTRACTOR

HIGHWAY STANDARDS

STANDARD NO.	DESCRIPTION
000001-09	STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
001006	DECIMAL OF AN INCH AND OF A FOOT
630001-13	STEEL PLATE BEAM GUARDRAIL
630101-11	STRONG POST GUARDRAIL ATTACHED TO CULVERT
630106-02	LONG-SPAN GUARDRAIL OVER CULVERT
630111-01	WEAK POST GUARDRAIL ATTACHED TO CULVERT
630201-07	PCC/HMA STABILIZATION AT STEEL PLATE BEAM GUARDRAIL
630301-09	SHOULDER WIDENING FOR TYPE 1 (SPECIAL) GUARDRAIL TERMINALS
631011-10	TRAFFIC BARRIER TERMINAL, TYPE 2
631026-06	TRAFFIC BARRIER TERMINAL, TYPE 5
631031-18	TRAFFIC BARRIER TERMINAL, TYPE 6
631032-10	TRAFFIC BARRIER TERMINAL, TYPE 6A
631033-09	TRAFFIC BARRIER TERMINAL, TYPE 6B
631046-04	TRAFFIC BARRIER TERMINAL, TYPE 10
643001-03	SAND MODULE IMPACT ATTENUATORS
664001-02	CHAIN LINK FENCE
665001-02	WOVEN WIRE FENCE
701001-02	OFF-ROAD OPERATIONS, 2L, 2W, MORE THAN 15' (4.5 M) AWAY
701006-05	OFF-ROAD OPERATIONS, 2L, 2W, 15' (4.5 M) TO 24" (600 MM) FROM PAVEMENT
701101-05	OFF-ROAD OPERATIONS, MULTILANE, 15' (4,5 M) TO 24" (600 MM) FROM PAVEMENT
701106-02	OFF-ROAD OPERATIONS, MULTILANE, MORE THAN 15' (4.5 M) AWAY
701201-05	LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEEDS > 45 MPH
701206-05	LANE CLOSURE, 2L, 2W, NIGHT ONLY, FOR SPEEDS > 45 MPH
701301-04	LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
701400-12	APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY
701401-13	LANE CLOSURE, FREEWAY/EXPRESSWAY
701406-13	LANE CLOSURE, FREEWAY/EXPRESSWAY, DAY OPERATIONS ONLY
701411-09	LANE CLOSURE, MULTILANE, AT ENTRANCE OR EXIT RAMP, FOR SPEEDS > 45 MPH
701421-08	LANE CLOSURE, MULTILANE, DAY OPERATIONS ONLY, FOR SPEEDS > 45 MPH TO 55
701422-10	LANE CLOSURE, MULTILANE, FOR SPEEDS > 45 MPH TO 55 MPH
701428-01	TRAFFIC CONTROL, SETUP AND REMOVAL, FREEWAY/EXPRESSWAY
701456-05	PARTIAL EXIT RAMP CLOSURE FREEWAY/EXPRESSWAY
701501-06	URBAN LANE CLOSURE, 2L, 2W, UNDIVIDED
701502-09	URBAN LANE CLOSURE, 2L, 2W, WITH BIDIRECTIONAL LEFT TURN LANE
701601-09	URBAN LANE CLOSURE, MULTILANE, 1W OR 2W WITH NONTRAVERSABLE MEDIAN
701602-10	URBAN LANE CLOSURE, MULTILANE, 2W WITH BIDIRECTIONAL LEFT TURN LANE
701606-10	URBAN SINGLE LANE CLOSURE, MULTILANE, 2W WITH MOUNTABLE MEDIAN
701701-10	URBAN LANE CLOSURE, MULTILANE INTERSECTION
701901-11	TRAFFIC CONTROL DEVICES

COMMITMENTS

THERE ARE NO COMMITMENTS FOR THIS CONTRACT

	USER NAME = Coey.Herrington	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	INDEX OF SHEETS, HIGHWAY STANDARDS, & GENERAL NOTES				FA RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -						VAR	D5 GR & FENCE REPAIR 2027-1	VARIOUS	10	2
		CHECKED -	REVISED -						CONTRACT NO. 70J06				
	PLOT DATE = 3/5/2026	DATE -	REVISED -		SCALE:	SHEET 1	OF 1	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT		

SUMMARY OF QUANTITIES

LOCATION:	VARIOUS ROUTES	VARIOUS ROUTES
COUNTY:	VARIOUS	VARIOUS
FUNDING BREAKOUT:	100% STATE	100% STATE
CONSTRUCTION CODE:	0021	0021

CODE NO.	PAY ITEM	UNIT	TOTAL QUANTITY	MCHD	GUARDRAIL
63000001	STEEL PLATE BEAM GUARDRAIL, TYPE A, 6 FOOT POSTS	FOOT	150.0	75.0	75.0
63100045	TRAFFIC BARRIER TERMINAL, TYPE 2	EACH	4.0	2.0	2.0
63100070	TRAFFIC BARRIER TERMINAL, TYPE 5	EACH	2.0	1.0	1.0
63100085	TRAFFIC BARRIER TERMINAL, TYPE 6	EACH	2.0	1.0	1.00
63100087	TRAFFIC BARRIER TERMINAL, TYPE 6A	EACH	2.0	1.0	1.0
63100089	TRAFFIC BARRIER TERMINAL, TYPE 6B	EACH	2.0	1.0	1.0
63100105	TRAFFIC BARRIER TERMINAL, TYPE 10	EACH	2.0	1.0	1.0
63100167	TRAFFIC BARRIER TERMINAL, TYPE 1 (SPECIAL) TANGENT	EACH	60.0	40.0	20.00
63400105	GUARD POSTS	EACH	11.0	10.0	1.0
64300260	IMPACT ATTENUATORS (FULLY REDIRECTIVE, NARROW), TEST LEVEL 3	EACH	2.0	1.0	1.0
64300370	IMPACT ATTENUATORS (FULLY REDIRECTIVE, WIDE), TEST LEVEL 3	EACH	2.0	1.0	1.0
66400105	CHAIN LINK FENCE, 4'	FOOT	300.0	200.0	100.0
66400305	CHAIN LINK FENCE, 6'	FOOT	400.0	200.0	200.0
66500105	WOVEN WIRE FENCE, 4'	FOOT	3000.0	2,000.0	1,000.0

MODEL: SOQ_1 [Sheet]
FILE NAME: c:\pw\work\pwidot\herrington\jd1208926\ID57\0\06-shh-SOQ.dgn

	USER NAME = Coey.Herrington	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES			F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					VAR	D5 GR & FENCE REPAIR 2027-1	VARIOUS	10	3
		CHECKED -	REVISED -					CONTRACT NO. 70J06				
	PLOT DATE = 4/15/2026	DATE -	REVISED -		SCALE:	SHEET 1	OF 4 SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT		

SUMMARY OF QUANTITIES

LOCATION:	VARIOUS ROUTES	VARIOUS ROUTES
COUNTY:	VARIOUS	VARIOUS
FUNDING BREAKOUT:	100% STATE	100% STATE
CONSTRUCTION CODE:	0021	0021

	CODE NO.	PAY ITEM	UNIT	TOTAL QUANTITY	MCHD	GUARDRAIL
	66501200	WOVEN WIRE GATES, 4' X 8' DOUBLE	EACH	2.0	1.0	1.0
*	72501000	TERMINAL MARKER - DIRECT APPLIED	EACH	28.0	14.0	14.0
*	78200005	GUARDRAIL REFLECTORS, TYPE A	EACH	14.0	8.0	6.0
	X2300003	SPLICING HIGH TENSION CABLE (BRIFEN)	EACH	2.0	1.0	1.0
	X2300004	SPLICING HIGH TENSION CABLE (GIBRALTAR)	EACH	5.0	3.0	2.0
	X2300005	SPLICING HIGH TENSION CABLE (TRINITY)	EACH	3.0	2.0	1.0
	X5030220	CONCRETE STRUCTURE REPAIR	CU FT	11.0	8.0	3.0
	X6300160	REPAIR STEEL PLATE BEAM GUARDRAIL, TYPE A	FOOT	6800.0	5,500.0	1,300.0
	X6300162	REPAIR STEEL PLATE BEAM GUARDRAIL, TYPE B	FOOT	26.0	25.0	1.0
	X6310302	REPAIR TRAFFIC BARRIER TERMINAL, TYPE 1 SPECIAL (TANGENT)	EACH	10.0	7.0	3.0
	X6310304	REPAIR TRAFFIC BARRIER TERMINAL, TYPE 1 SPECIAL (FLARED)	EACH	2.0	1.0	1.0
	X6310316	REPAIR TRAFFIC BARRIER TERMINAL, TYPE 2	EACH	4.0	2.0	2.0
	X6310326	REPAIR TRAFFIC BARRIER TERMINAL, TYPE 5	EACH	2.0	1.0	1.0
	X6310330	REPAIR TRAFFIC BARRIER TERMINAL, TYPE 6	EACH	2.0	1.0	1.0
*= SPECIALTY ITEM						

MODEL: SOQ 2 [Sheet]
FILE NAME: c:\pw\work\pwidot\herrington\jcd1208926\ID57\0J06-shh-SOQ.dgn

	USER NAME = Coey.Herrington	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES			F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					VAR	D5 GR & FENCE REPAIR 2027-1	VARIOUS	10	4
		CHECKED -	REVISED -					CONTRACT NO. 70J06				
	PLOT DATE = 4/9/2026	DATE -	REVISED -		SCALE:	SHEET 2	OF 4	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT	

SUMMARY OF QUANTITIES

LOCATION:	VARIOUS ROUTES	VARIOUS ROUTES
COUNTY:	VARIOUS	VARIOUS
FUNDING BREAKOUT:	100% STATE	100% STATE
CONSTRUCTION CODE:	0021	0021

	CODE NO.	PAY ITEM	UNIT	TOTAL QUANTITY	MCHD	GUARDRAIL
	X6310332	REPAIR TRAFFIC BARRIER TERMINAL, TYPE 6A	EACH	2.0	1.0	1.0
	X6310334	REPAIR TRAFFIC BARRIER TERMINAL, TYPE 6B	EACH	2.0	1.0	1.0
	X6330725	STEEL PLATE BEAM GUARDRAIL (SHORT RADIUS)	FOOT	50.0	25.0	25.0
	X6331110	STEEL POSTS (SPECIAL)	EACH	3.0	2.0	1.0
	X6340205	GUARD POSTS REMOVAL	EACH	11.0	10.0	1.0
	X6432110	REPLACE IMPACT ATTENUATORS (NON-REDIRECTIVE), TEST LEVEL 3	EACH	90.0	75.0	15.0
	X6432223	REPAIR IMPACT ATTENUATORS (FULLY REDIRECTIVE, NARROW), TEST LEVEL 3	EACH	2.0	1.0	1.0
	X6440130	REPAIR HIGH TENSION CABLE (GIBALTAR)	FOOT	700.0	550.0	150.0
	X6440132	REPAIR HIGH TENSION CABLE SYSTEM END SECTION (GIBALTAR)	EACH	30.0	10.0	20.0
	X6440133	REPAIR POSTS (GIBALTAR)	EACH	415.0	300.0	115.0
	X6440150	REPAIR HIGH TENSION CABLE (BRIFEN)	FOOT	70.0	40.0	30.0
	X6440153	REPAIR POSTS (BRIFEN)	EACH	11.00	6.0	5.0
	X6440156	REPAIR HIGH TENSION CABLE SYSTEM END SECTION (BRIFEN)	EACH	2.0	1.0	1.0
	X6440160	REPAIR HIGH TENSION CABLE (TRINITY)	FOOT	200.0	150.0	50.0

MODEL: SOQ 3 [Sheet]
FILE NAME: c:\pw_work\pwidot\herrington\jd1208926\ID57\0J06-sh-SOQ.dgn

	USER NAME = Coey.Herrington	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES			F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					VAR	D5 GR & FENCE REPAIR 2027-1	VARIOUS	10	5
		CHECKED -	REVISED -					CONTRACT NO. 70J06				
	PLOT DATE = 4/9/2026	DATE -	REVISED -		SCALE:	SHEET 3	OF 4 SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT		

SUMMARY OF QUANTITIES

LOCATION:

VARIOUS ROUTES

VARIOUS ROUTES

COUNTY:

VARIOUS

VARIOUS

FUNDING BREAKOUT:

100% STATE

100% STATE


CONSTRUCTION CODE:

0021

0021

[illegible]


MODEL: Detail 1 [Sheet]
FILE NAME: c:\p\work\pav\detail\herrington\3d1208926\ID57\0J06-shd-details.dgn

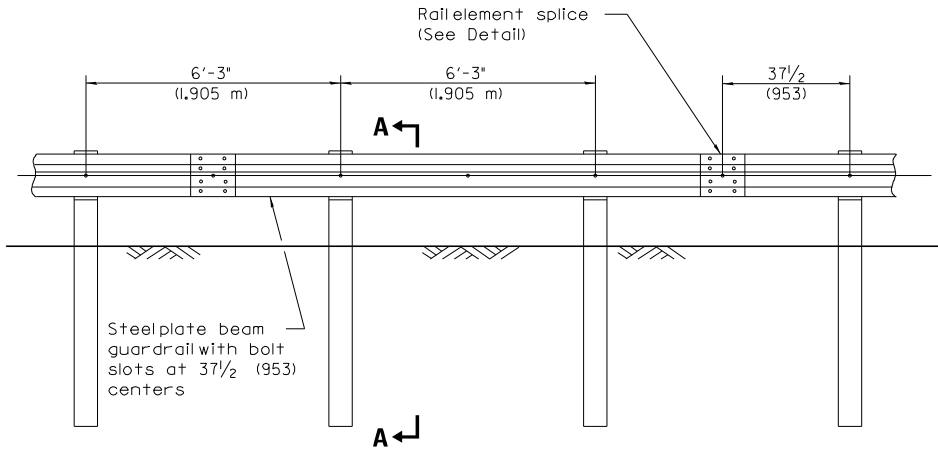

ELEVATION


TYPE A

6'-3" (1,905 m) Typical post spacing

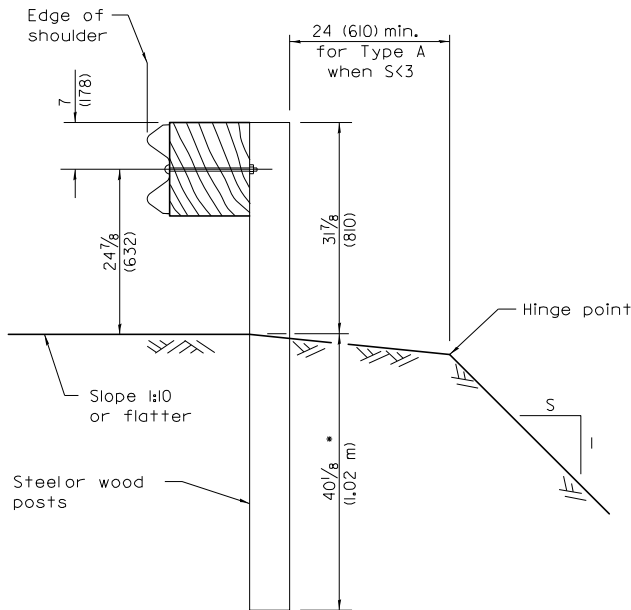


SECTION A-A

- When "S" is less than 3 and the distance from the back of post is less than 24 (610), the post shall be steel and the embedment shall be 76 7/8 (1934).

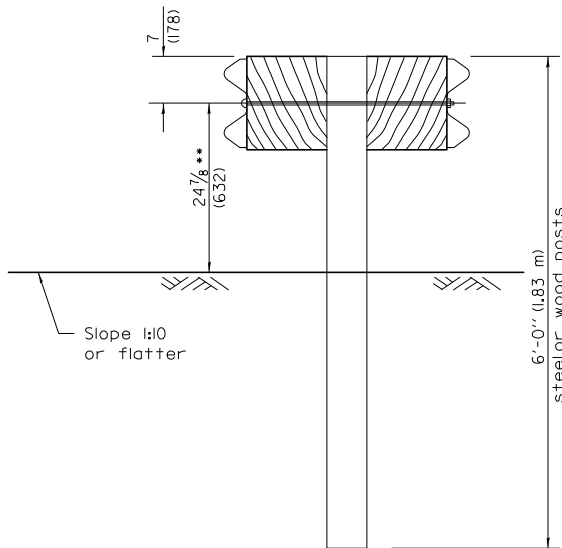

SECTION B-B


- When connecting Type D guardrail to an impact attenuator, adjust this dimension to 21 1/8 (556) over a distance of 25'-0" (7,62 m) from point of connection.

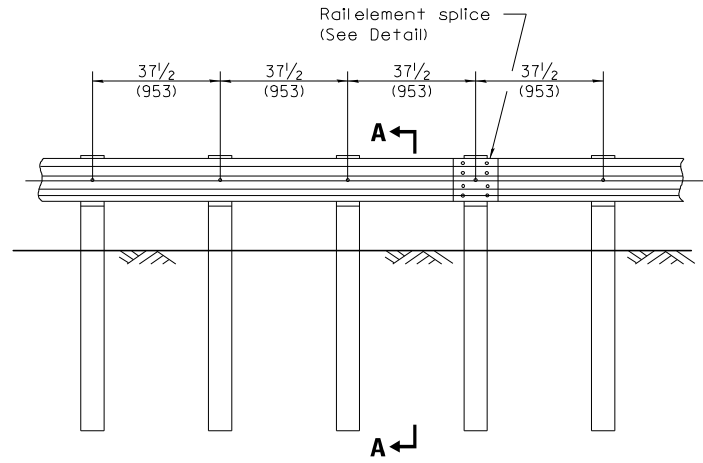

ELEVATION

TYPE B

37 1/2 (953) Closed post spacing

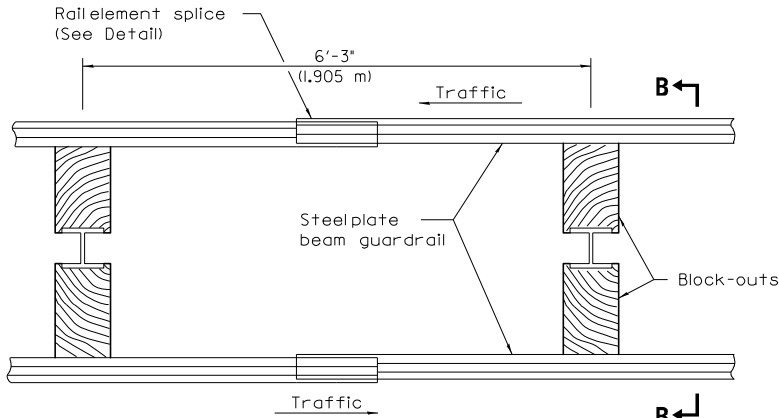

PLAN

TYPE D

Double steel plate beam guardrail
6'-3" (1,905 m) typical post spacing

GENERAL NOTES

All slope ratios are expressed as units of vertical displacement to units of horizontal displacement (V:H).

All dimensions are in inches (millimeters) unless otherwise shown.

STEEL PLATE BEAM GUARDRAIL

(Sheet 1 of 4)

STANDARD 630001-10


USER NAME = Coey.Herrington	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 4/9/2026	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**


DETAIL OF 27 1/2" STEEL PLATE BEAM GUARDRAIL

SCALE: SHEET 1 OF 4 SHEETS STA. TO STA.


F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D5 GR & FENCE REPAIR 2027-1	VARIOUS	10	7
CONTRACT NO. 70J06				
ILLINOIS FED. AID PROJECT				

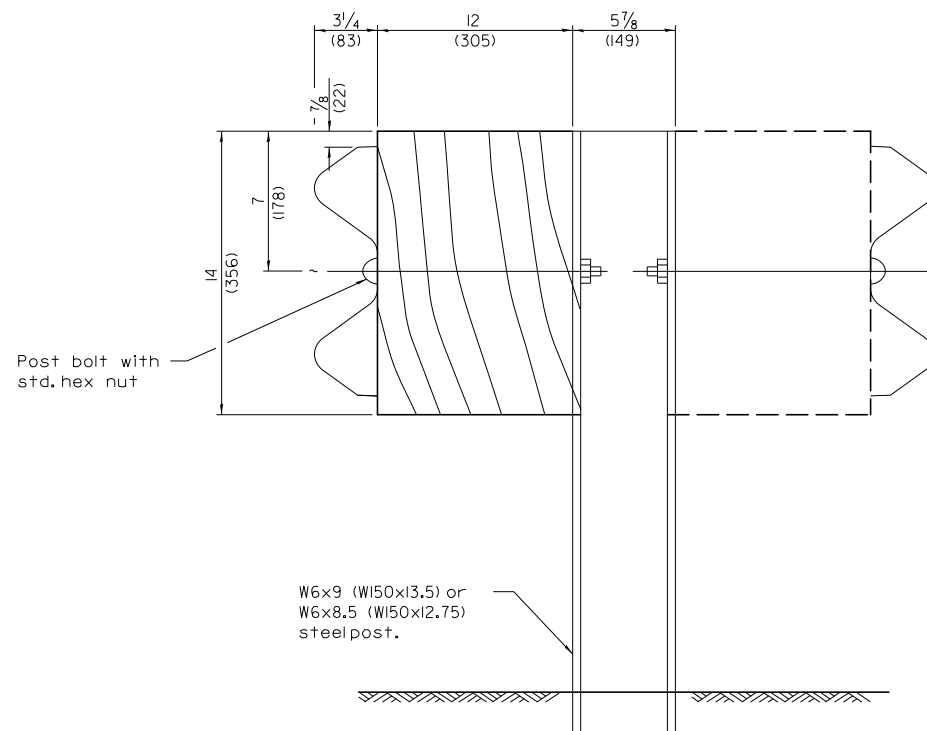

STEEL POST CONSTRUCTION

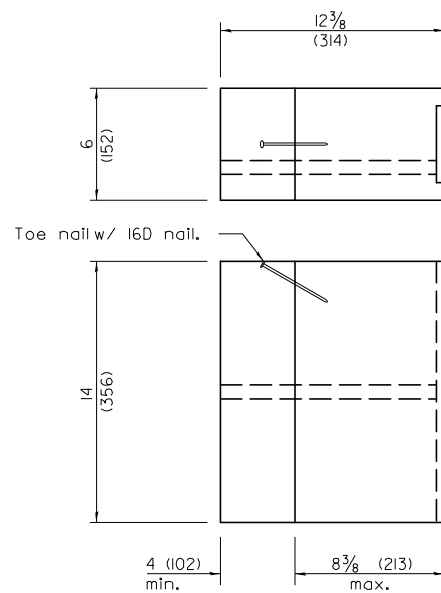


TWO-PIECE WOOD BLOCKOUT OPTION

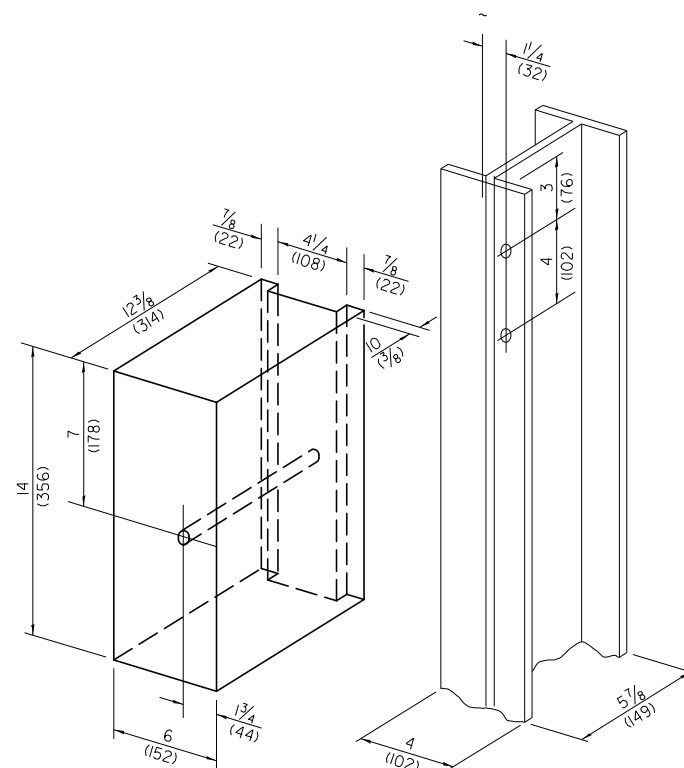


Note:
All holes 3/4 (20) dia.

WOOD BLOCK-OUT AND STEEL POST DETAILS

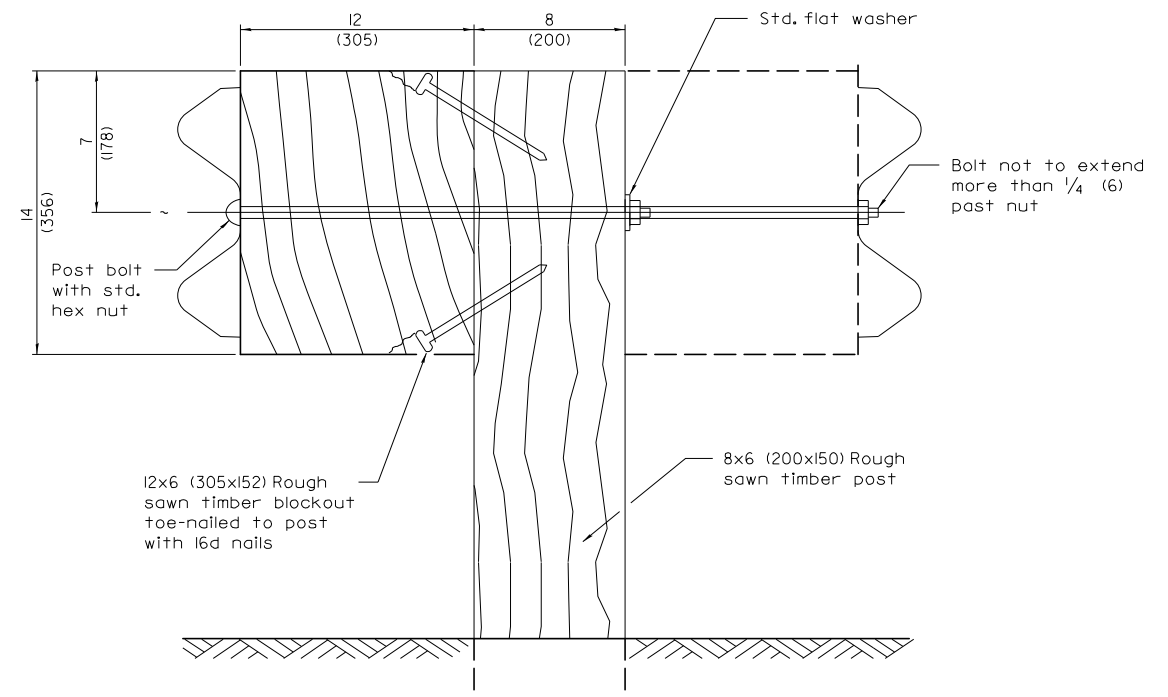

WOOD POST CONSTRUCTION

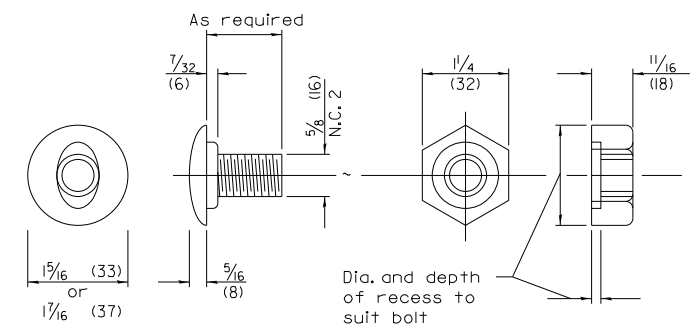

POST OR SPLICE BOLT & NUT

STEEL PLATE BEAM GUARDRAIL

(Sheet 2 of 4)

STANDARD 630001-10

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**


DETAIL OF 27 1/2" STEEL PLATE BEAM GUARDRAIL

SCALE: SHEET 2 OF 4 SHEETS STA. TO STA.


F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D5 GR & FENCE REPAIR 2027-1	VARIOUS	10	8
CONTRACT NO. 70J06				
ILLINOIS FED. AID PROJECT				

USER NAME = Coey.Herrington	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 3/5/2026	DATE -	REVISED -


MODEL: Detail 3 (Sheet)
FILE NAME: c:\p\work\widetoherrington\3d1208926\ID57\0J06-shd-details.dgn

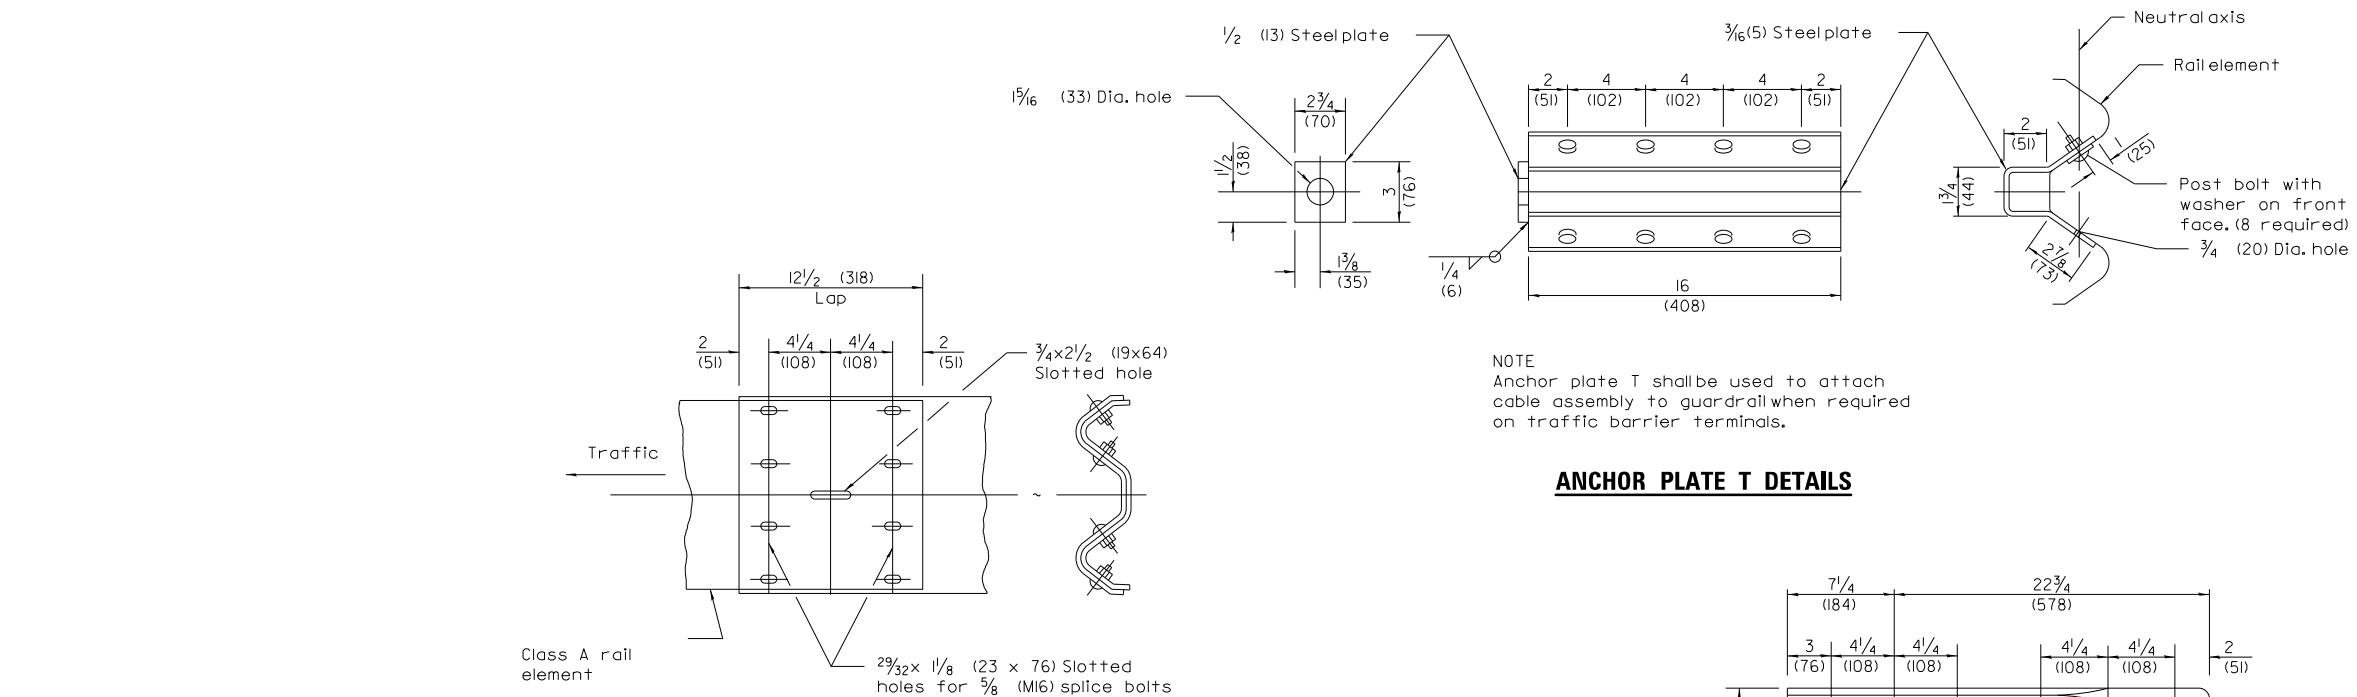

ANCHOR PLATE T DETAILS

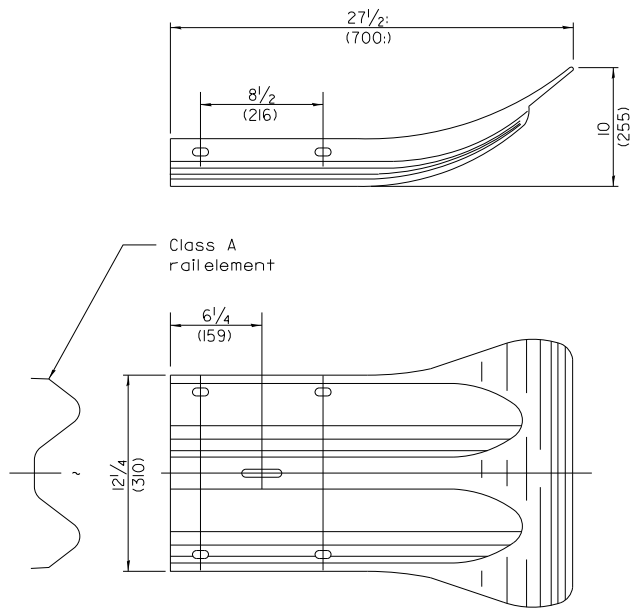

RAIL ELEMENT SPLICE

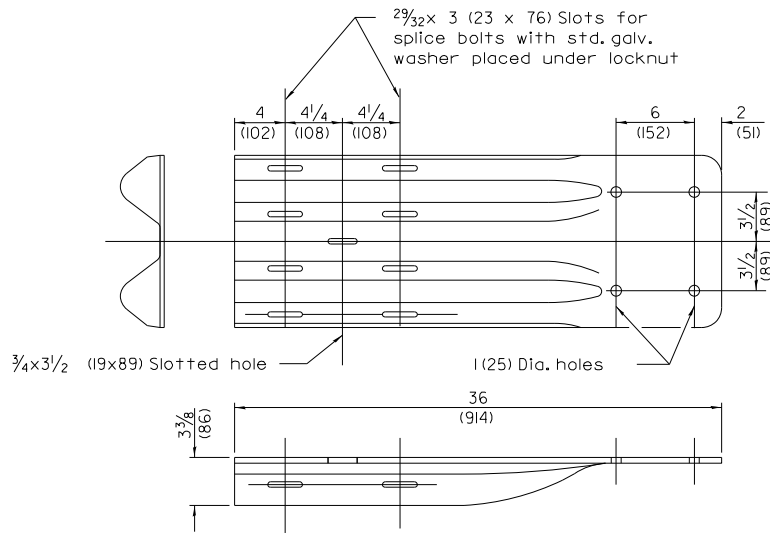


NOTE
When end shoe is attached to a bridge parapet which has an expansion joint, the bolts shall be provided with a locknut or double nut and shall be tightened only to a point that will allow guardrail movement.

The standard end shoe shall be attached to the concrete with pre-drilled or self-drilling anchor bolts. The anchor cone shall be set flush with the surface of the concrete.

Externally threaded studs protruding from the surface of the concrete will not be permitted.

END SHOE

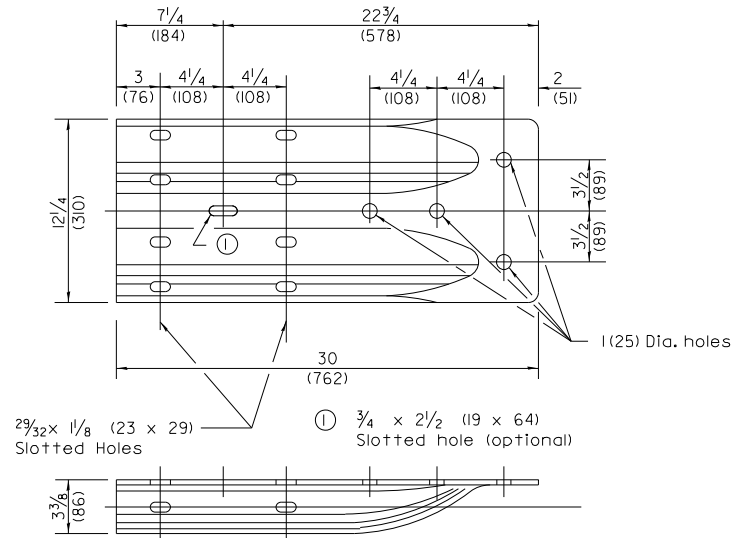

STEEL PLATE BEAM GUARDRAIL

(Sheet 3 of 4)

STANDARD 630001-10

USER NAME = Coey.Herrington	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 4/9/2026	DATE -	REVISED -


STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

DETAIL OF 27 1/2" STEEL PLATE BEAM GUARDRAIL


SCALE: SHEET 3 OF 4 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D5 GR & FENCE REPAIR 2027-1	VARIOUS	10	9
CONTRACT NO. 70J06				
ILLINOIS FED. AID PROJECT				

MODEL: Detail 4 (Sheet)
FILE NAME: c:\pjk_work\pjd\herrington\3d1208926\ID57\0J06-shd-details.dgn




PLAN

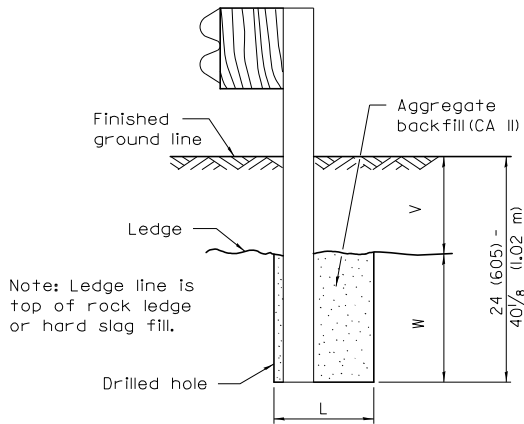


ELEVATION

**FOOTING FOR POST WHEN IMPERVIOUS
MATERIAL IS ENCOUNTERED**

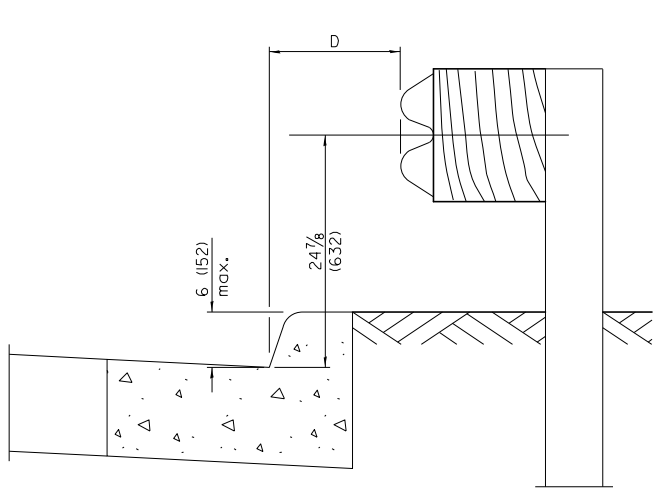

0 ≤ D < 4'-0" (1.2 m)

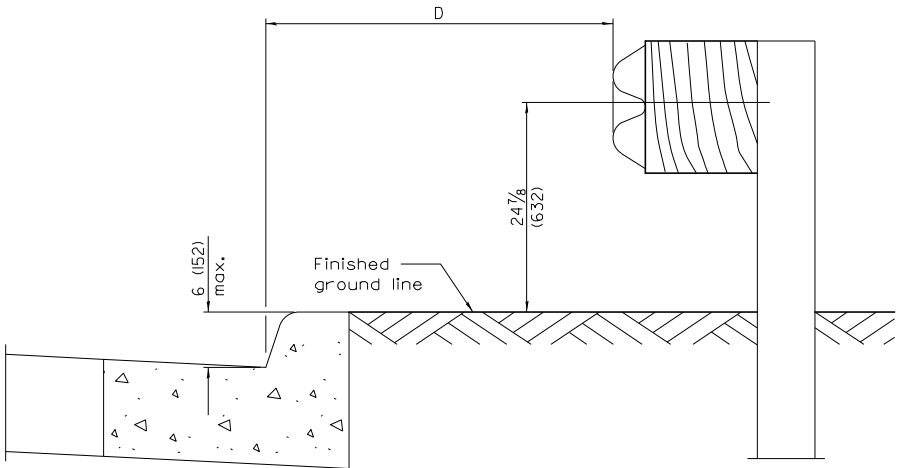


4'-0" (1.2 m) ≤ D ≤ 12'-0" (3.7 m)

GUARDRAIL PLACED BEHIND CURB

Note: 'D' shall not exceed 6 (152) for design speeds greater than 45 mph.

V	W	L	
		Steel Post	Wood Post
0 - 6 (0 - 152)	24 (610)	21 (530)	23 (580)
> 6 - 18 (> 152 - 458)	18 (458)	14 1/2 (368)	16 1/2 (419)
> 18 - 31 (> 458 - 787)	12 (305)	8 (203)	10 (250)
> 31 - 40 1/8 (> 787 - 1,02 m)	12 - 0 (305 - 0)	8 (203)	10 (250)

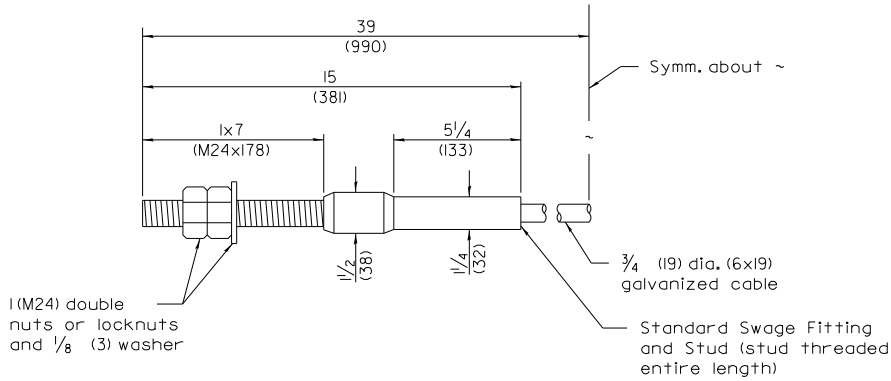

CABLE ASSEMBLY

(40,000 lbs. (18,100 kg) min. breaking strength)
Tighten to taut tension.

**STEEL PLATE BEAM
GUARDRAIL**

(Sheet 4 of 4)

STANDARD 630001-10

USER NAME = Coey.Herrington	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 4/9/2026	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

DETAIL OF 27 1/2" STEEL PLATE BEAM GUARDRAIL

SCALE: SHEET 4 OF 4 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D5 GR & FENCE REPAIR 2027-1	VARIOUS	10	10
CONTRACT NO. 70J06				
ILLINOIS FED. AID PROJECT				