

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

FAI RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
74 & 57	D5 TREE REM 2027-1	CHA & DOU	5	1
ILLINOIS CONTRACT NO. 70J08				

FOR INDEX OF SHEETS, SEE SHEET NO. 2
FOR SUMMARY ON QUANTITIES, SEE SHEET 4


TRAFFIC DATA				
	LEG "A"	LEG "B"	LEG "C"	LEG "D"
2026 ADT =	21,500	21,400	20,300	31,300
P.U. & P.C.% =	60.6	60.9	59.3	74.7
S.U.% =	3.1	5.0	4.2	2.6
M.U.% =	36.3	34.1	36.5	22.7

TRAFFIC DATA LOCATIONS	
LEG "A"	IS I-57 FROM SADORUS RD TO PESOTUM IN CHAMPAIGN COUNTY
LEG "B"	IS I-57 FROM PESOTUM IN CHAMPAIGN COUNTY TO US 36 IN DOUGLAS COUNTY
LEG "C"	IS I-57 FROM US 36 TO IL 133 IN DOUGLAS COUNTY
LEG "D"	IS I-74 FROM UNIVERSITY AVE IN URBANA TO ST. JOSEPH IN CHAMPAIGN COUNTY

PROPOSED
HIGHWAY PLANS

FAI ROUTE 74 & 57 (I 74 & I 57)
SECTION D5 TREE REM 2027-1
TREE REMOVAL
CHAMPAIGN & DOUGLAS COUNTY

C-95-023-27

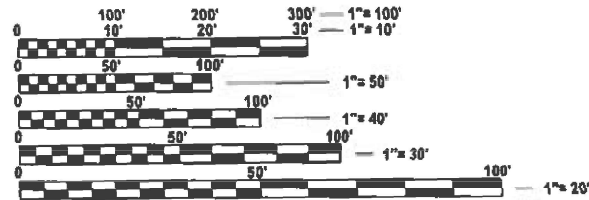

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD
ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT
CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS
ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123 ST. JOSEPH, CUNNINGHAM, PESOTUM
OR 811 TUSCOLA, & ARCOLA TOWNSHIPS

PROJECT ENGINEER: RYAN CARROLL, P.E.
SQUAD LEADER: COEY HERRINGTON
PHONE NUMBER: 217-465-4181
CONTRACT NO. 70J08



FOR DETAILED LOCATION MAP, SEE SHEET NO. 3



STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED 5/4 20 26
Kamil A. Barnett JWS REGIONAL ENGINEER

June 26 20 26
S. E. A. E. K. ENGINEER OF DESIGN AND ENVIRONMENT

June 26 20 26
J. H. H. 5 DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1	COVER SHEET
2	INDEX OF SHEETS
2	HIGHWAY STANDARDS
2	GENERAL NOTES
2	COMMITMENTS
3	DETAILED LOCATION MAP
4	SUMMARY OF QUANTITIES
5	SCHEDULE OF QUANTITIES

HIGHWAY STANDARDS

STANDARD NO.	DESCRIPTION
000001-09	STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
001006	DECIMAL OF AN INCH AND OF A FOOT
701101-05	OFF-ROAD OPERATIONS, MULTILANE, 15' (4.5 M) TO 24" (600 MM) FROM PAVEMENT
701106-02	OFF-ROAD OPERATIONS, MULTILANE, MORE THAN 15' (4.5 M) AWAY
701400-12	APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY
701406-13	LANE CLOSURE, FREEWAY/EXPRESSWAY, DAY OPERATIONS ONLY
701428-01	TRAFFIC CONTROL, SETUP AND REMOVAL, FREEWAY/EXPRESSWAY
701451-05	RAMP CLOSURE FREEWAY/EXPRESSWAY
701456-05	PARTIAL EXIT RAMP CLOSURE FREEWAY/EXPRESSWAY
701901-11	TRAFFIC CONTROL DEVICES

GENERAL NOTES

G.N.-100A

ELECTRONIC FILES AND/OR ELECTRONIC SURVEY INFORMATION INCLUDING CADD FILES WILL NOT BE AVAILABLE TO THE CONTRACTOR.

G.N.-201

TREES THAT INTERFERE WITH THE CONSTRUCTION OPERATIONS SHALL BE REMOVED AS DIRECTED BY THE ENGINEER. ANY TREE DUE TO ITS LOCATION AND DEEMED SUITABLE FOR SAVING BY THE ENGINEER SHALL BE PROTECTED DURING CLEARING AND SUBSEQUENT CONSTRUCTION OPERATIONS.



COMMITMENTS

THERE ARE NO COMMITMENTS FOR THIS CONTRACT


MODEL: Index of Sheets [Sheet]
FILE NAME: c:\pw_workspace\herrington\id1214584\ID570\008-ahg-gennote.dgn

	USER NAME = Coey, Herrington	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	INDEX OF SHEETS, HIGHWAY STANDARDS, GENERAL NOTES, COMMITMENTS	SCALE:	SHEET 1	OF 1	SHEETS	STA.	TO STA.	F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -									74 & 57	D5 TREE REM 2027-1	CHA & DOU	5	2
		CHECKED -	REVISED -									CONTRACT NO. 70J08				
	PLOT DATE = 5/6/2026	DATE -	REVISED -									ILLINOIS FED. AID PROJECT				


MODEL: Detailed Location Map (Sheet)
FILE NAME: c:\p\work\pawidd\herrington\3d1214584\ID57\0308-sh-nisc.dgn

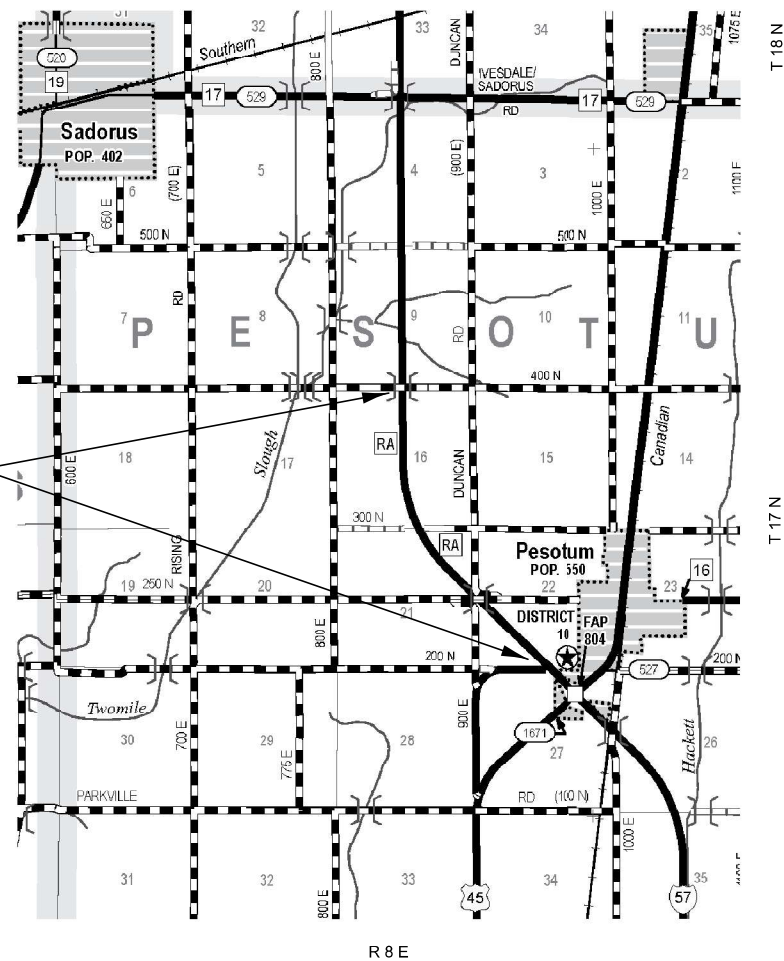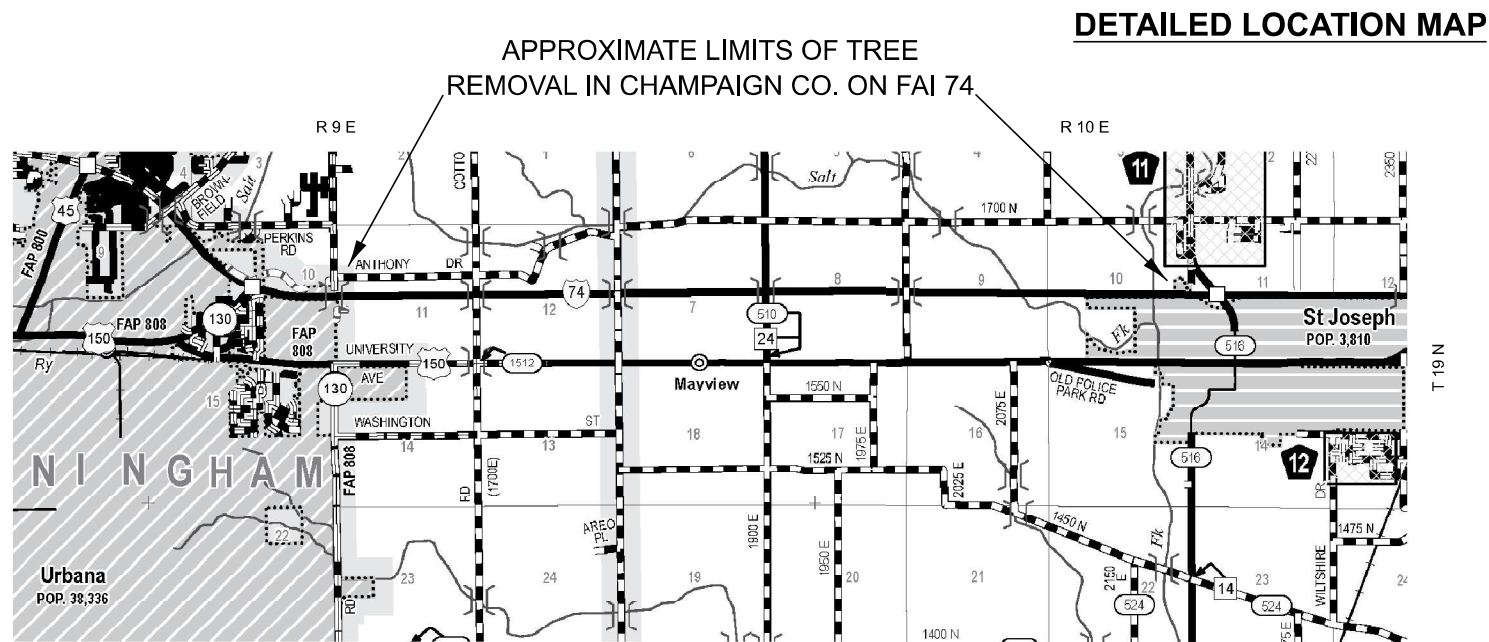

APPROXIMATE LIMITS OF TREE
REMOVAL IN DOUGLAS CO.
ON FAI 57

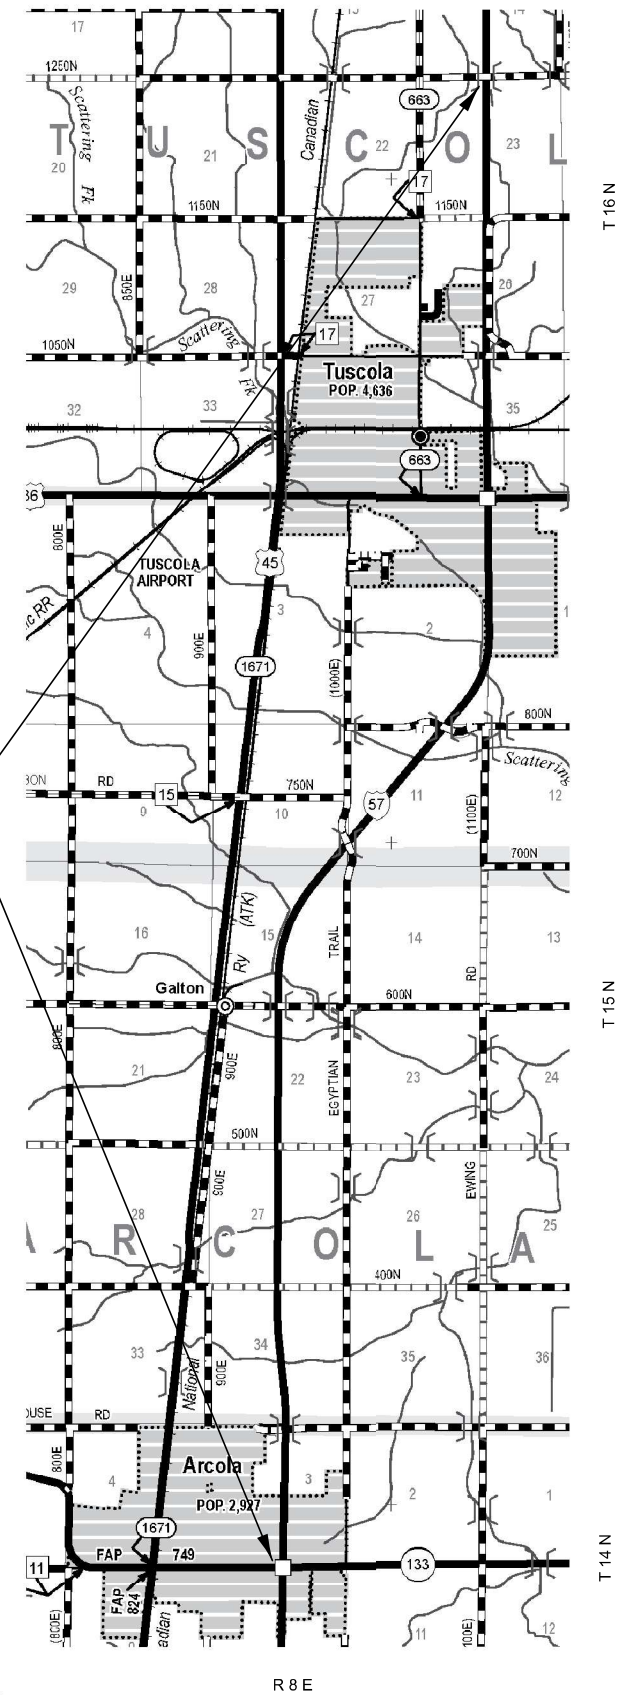

SCALE FOR MAIN MAP



USER NAME	= Coey.Herrington	DESIGNED	-	REVISED	-
DRAWN		REVISED	-		
CHECKED		REVISED	-		
PLOT DATE	= 4/2/2026	DATE	-	REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DETAILED LOCATION MAP

SCALE: SHEET 1 OF 1 SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
74 & 57	D5 TREE REM 2027-1	CHA & DOU	5	3
CONTRACT NO. 70J08				
ILLINOIS FED. AID PROJECT				

SUMMARY OF QUANTITIES

LOCATION OF WORK:	FAI 74 (I 74)	FAI 74 (I 74)	FAI 57 (I-57)	FAI 57 (I-57)
	INTERSTATE	INTERSTATE	INTERSTATE	INTERSTATE
	RURAL	URBAN	RURAL	RURAL
COUNTY:	CHAMPAIGN CO	CHAMPAIGN CO	CHAMPAIGN CO	DOUGLAS CO
FUNDING BREAKOUT:	100% STATE	100% STATE	100% STATE	100% STATE
CONSTRUCTION TYPE CODE:	0031	0031	0031	0031

[illegible]

MODEL: Summary of Quantities [Sheet]
FILE NAME: c:\pw_work\pwidth\thernington\td1214584\DS70J08-sht-SOQ.dgn

USER NAME = Coey,Herrington	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES					F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	DRAWN -	REVISED -							74 & 57	D5 TREE REM 2027-1	CHA & DOU	5	4
	CHECKED -	REVISED -		CONTRACT NO. 70J08									
PLOT DATE = 3/30/2026	DATE -	REVISED -		SCALE:	SHEET 1	OF 1	SHEETS	STA.	TO STA.		ILLINOIS FED. AID PROJECT		

MODEL: Schedule of Quantities (Sheet)
FILE NAME: c:\paw_work\pawidolherrington\jd121458\ID57\0108-ah-schedule.dgn

SCHEDULE OF QUANTITIES

MARKED TREE NO.	ROUTE	URBAN / RURAL	CHAMPAIGN COUNTY	APPROX COORDINATES				Species	20100210
			LOCATION DESCRIPTION						TREE REMOVAL (OVER 15 UNITS DIAMETER)
5	I-74	URBAN	EB APPROX 700' E OF THE HIGHCROSS RD OVERHEAD S SIDE OF ROAD	40.12008	N	88.16015	W	OAK	40
6	I-74	URBAN	EB APPROX 700' E OF THE HIGHCROSS RD OVERHEAD S SIDE OF ROAD	40.12008	N	88.16015	W	OAK	34
7	I-74	RURAL	EB APPROX 950' E OF THE COTTONWOOD RD OVERHEAD S SIDE OF ROAD	40.12016	N	88.14023	W	OAK	40
8	I-74	RURAL	EB JUST W OF THE ST JOSEPH EXT S SIDE OF ROAD	40.12011	N	88.04993	W	OAK	45
9	I-74	RURAL	EB JUST W OF THE ST JOSEPH EXIT S SIDE OF ROAD	40.12012	N	88.04936	W	OAK	45
10	I-74	RURAL	WB APPROX 1.8 MI E OF THE ST JOESEPH EXT N SIDE OF ROAD	40.12043	N	88.00271	W	COTTON	54
11	I-74	RURAL	WB APPROX 1.0 MI E OF THE ST JOESEPH EXT N SIDE OF ROAD	40.12056	N	88.02013	W	LOCUST	35
12	I-74	URBAN	WB APPROX 0.7 MI E OF THE HIGHCROSS RD OVERHEAD N SIDE OF ROAD	40.12067	N	88.14839	W	OAK	35
13	I-57	RURAL	LOCATED INSIDE THE ILLINI PRAIRIE REST AREAS					CYPRESS	23
14	I-57	RURAL	LOCATED INSIDE THE ILLINI PRAIRIE REST AREAS					CYPRESS	21
15	I-57	RURAL	LOCATED INSIDE THE ILLINI PRAIRIE REST AREAS					CYPRESS	23
16	I-57	RURAL	LOCATED INSIDE THE ILLINI PRAIRIE REST AREAS					CYPRESS	23
17	I-57	RURAL	LOCATED INSIDE THE ILLINI PRAIRIE REST AREAS					CYPRESS	28
18	I-57	RURAL	LOCATED INSIDE THE ILLINI PRAIRIE REST AREAS					CYPRESS	38
19	I-57	RURAL	LOCATED INSIDE THE ILLINI PRAIRIE REST AREAS					CYPRESS	29
20	I-57	RURAL	LOCATED INSIDE THE ILLINI PRAIRIE REST AREAS					CYPRESS	25
21	I-57	RURAL	NB APPROX 400' S OF THE CR 400N OVERHEAD E SIDE OF ROAD	39.93631	N	88.30278	W	OAK	40

MARKED TREE NO.	ROUTE	URBAN / RURAL	DOUGLAS COUNTY	APPROX. COORDINATES				Species	20100210
			LOCATION DESCRIPTION						TREE REMOVAL
									(OVER 15 UNITS DIAMETER)
22	I-57	RURAL	NB AT THE ARCOLA ENTRANCE RAMP E SIDE OF THE RAMP	38.68298	N	88.29159	W	COTTON	28
23	I-57	RURAL	SB APPROX 0.4 MI S OF THE CR1250N OVERHEAD/MULTISTEM	39.82875	N	88.26501	W	ASH	20
	I-57	RURAL	(PART OF TREE NO. 23 MULTISTEM)	39.82875	N	88.26501	W	ASH	17
24	I-57	RURAL	SB APPROX 1.0 MI S OF CR 1250N OVERHEAD W SIDE OF ROAD	39.82138	N	88.26507	W	BIRCH	17
25	I-57	RURAL	SB APPROX 1.0 MI S OF CR 1250N OVERHEAD W SIDE OF ROAD	39.82139	N	88.26507	W	BIRCH	24
26	I-57	RURAL	SB @ CR 1150N NEAR THE "ILLINI" GRAIN BIN W SIDE OF ROAD	39.82025	N	88.26507	W	BIRCH	18
27	I-57	RURAL	SB @ CR 1150N NEAR THE "ILLINI" GRAIN BIN W SIDE OF ROAD	39.82025	N	88.26507	W	BIRCH	21
28	I-57	RURAL	SB @ CR 1150N NEAR THE "ILLINI" GRAIN BIN W SIDE OF ROAD	39.82025	N	88.26507	W	BIRCH	21
29	I-57	RURAL	SB 0.5 MI N OF CR 1050N OVERHEAD W SIDE OF ROAD NEAR "LODGING EXIT 212"	39.81312	N	88.26501	W	ASH	22
30	I-57	RURAL	SB JUST N OF CR 300 N OVERHEAD W SIDE OF ROAD/MULTISTEM	39.69549	N	88.29217	W	COTTON	12
	I-57	RURAL	(PART OF TREE NO. 30 MULTISTEM)	39.69549	N	88.29217	W	COTTON	13
	I-57	RURAL	(PART OF TREE NO. 30 MULTISTEM)	39.69549	N	88.29217	W	COTTON	12
	I-57	RURAL	(PART OF TREE NO. 30 MULTISTEM)	39.69549	N	88.29217	W	COTTON	28
31	I-57	RURAL	ALONG THE SB ARCOLA EXIT RAMP W SIDE OF RAMP	39.68417	N	88.29269	W	SWEETGUM	21
32	I-57	RURAL	ALONG THE SB ARCOLA EXIT RAMP W SIDE OF RAMP					ASH	20
33	I-57	RURAL	ALONG THE SB ARCOLA EXIT RAMP W SIDE OF RAMP					SWEETGUM	22

I-74		TOTAL	328
I-57		TOTAL	566

	USER NAME = Coey.Herrington	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE OF QUANTITIES			F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					74 & 57	D5 TREE REM 2027-1	CHA & DOU	5	5
		CHECKED -	REVISED -					CONTRACT NO. 70J08				
	PLOT DATE = 3/30/2026	DATE -	REVISED -					ILLINOIS FED.AID PROJECT				
SCALE:		SHEET 1 OF 1 SHEETS		STA.		TO STA.						