


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	SHEET NO. - S-16 S-66 SHEETS
346	•	LAKE	469	185	
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT-			
• 125X-HB-(1&2) R-1			CONTRACT # 60826		

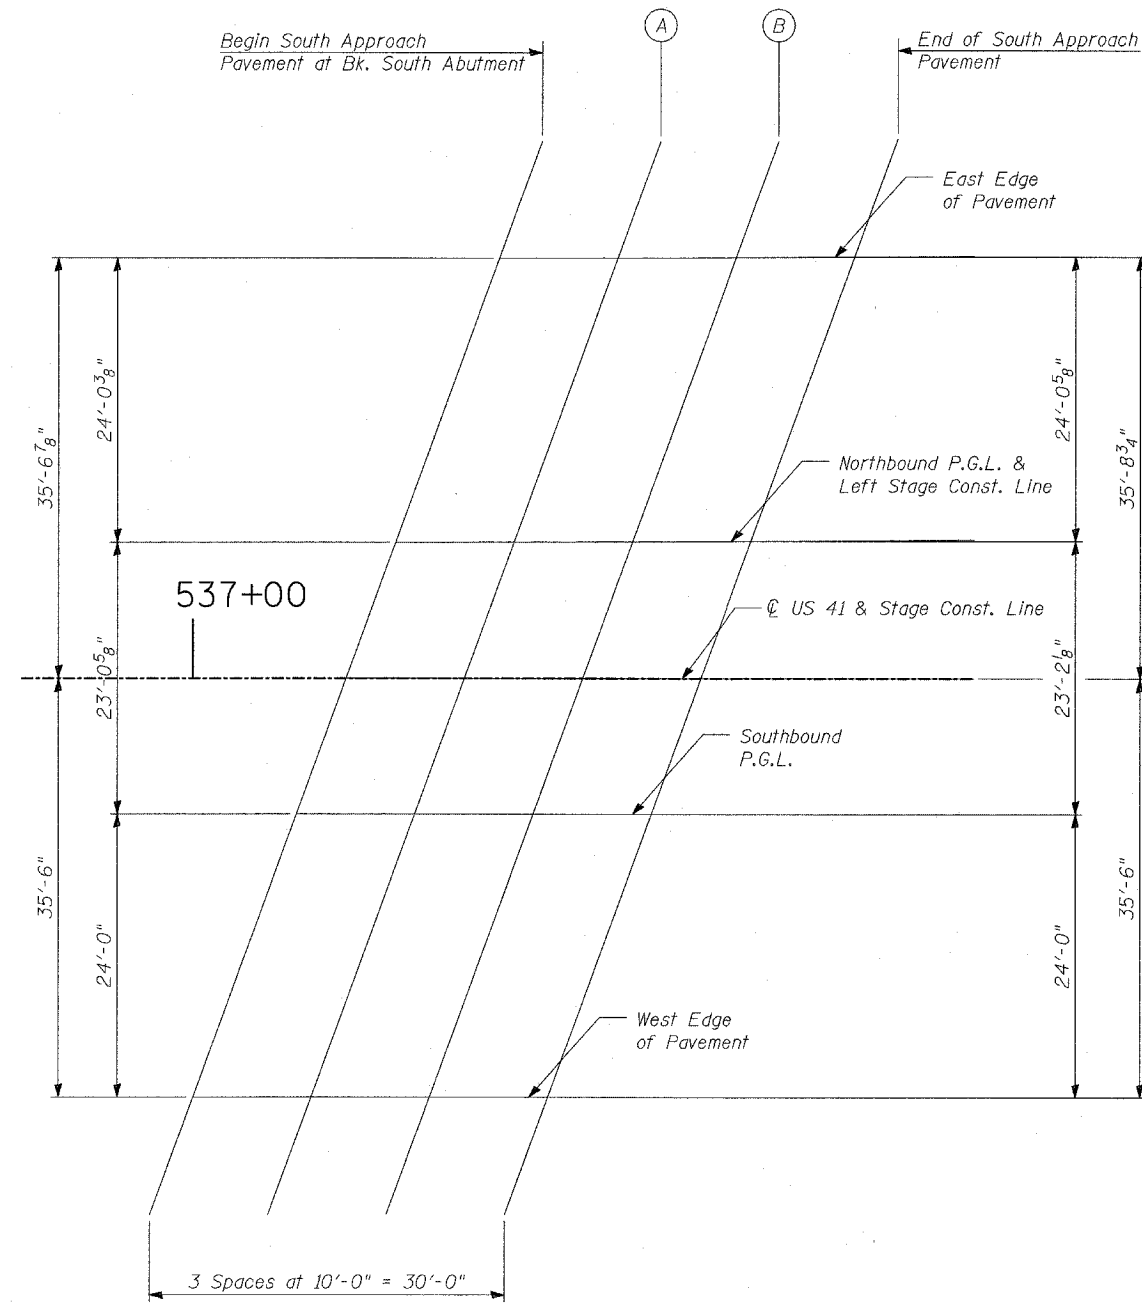

PLAN

EAST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
Begin S. Appr. Pav't	537+25.90	-35.58'	702.26
A	537+35.91	-35.62'	702.06
B	537+45.93	-35.67'	701.86
End S. Appr. Pav't	537+55.95	-35.73'	701.65

NORTHBOUND P.G.L. & LEFT STAGE CONSTRUCTION LINE

Location	Station	Offset	Theoretical Grade Elevations
Begin S. Appr. Pav't	537+17.15	-11.55'	702.43
A	537+27.16	-11.58'	702.24
B	537+37.18	-11.62'	702.04
End S. Appr. Pav't	537+47.20	-11.67'	701.83

Q US 41 & STAGE CONSTRUCTION LINE

Location	Station	Offset	Theoretical Grade Elevations
Begin S. Appr. Pav't	537+12.95	00.00'	702.05
A	537+22.95	00.00'	701.86
B	537+32.95	00.00'	701.66
End S. Appr. Pav't	537+42.95	00.00'	701.46

SOUTHBOUND P.G.L.

Location	Station	Offset	Theoretical Grade Elevations
Begin S. Appr. Pav't	537+08.76	11.50'	702.59
A	537+18.76	11.50'	702.40
B	537+28.76	11.50'	702.20
End S. Appr. Pav't	537+38.76	11.50'	702.01

WEST EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
Begin S. Appr. Pav't	537+00.03	35.50'	702.74
A	537+10.03	35.50'	702.56
B	537+20.03	35.50'	702.37
End S. Appr. Pav't	537+30.03	35.50'	702.18

TYLIN INTERNATIONAL

DESIGNED	- MAF
CHECKED	- AD
DRAWN	- MAF
CHECKED	- AD

TOP OF SOUTH APPROACH SLAB ELEVATIONS

FAP 346 (U.S. ROUTE 41 - SKOKIE HIGHWAY) OVER ILLINOIS ROUTE 132
SECTION 125X-HB-(1&2)R-1
LAKE COUNTY
S.N. 049-0209