F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
6208	07-00093-00-RP	KANKAKEE	43	24
MG2A# M2-096		CONTRACT NO.: 87342		

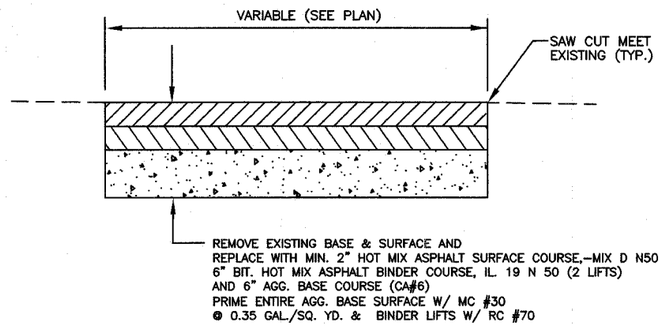

PAVEMENT RESTORATION – HEAVY DUTY
(AT STORM SEWER CROSSINGS)
N.T.S

VILLAGE OF BRADLEY, IL.
CONSTRUCTION STANDARDS
FOR
TYPICAL PAVEMENT TRENCH
RESTORATION–COLLECTOR STREETS
STANDARD # ST–1140

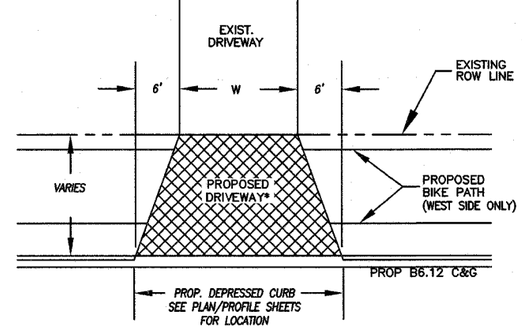

* SEE PROPOSED DRIVEWAY CROSS SECTION DETAIL & DRIVEWAY SCHEDULE FOR PAVEMENT REQUIREMENTS

FLARED DRIVEWAY ENTRANCE
N.T.S



BITUMINOUS DRIVEWAY CROSS SECTION
N.T.S

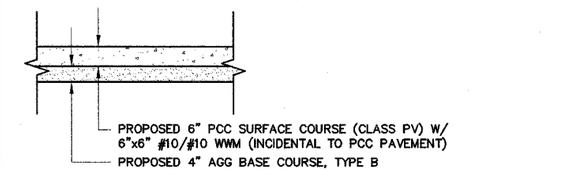

CONCRETE DRIVEWAY CROSS SECTION
N.T.S

TYPICAL TYPE M3.12 COMBINATION
CONCRETE CURB & GUTTER

TYPICAL DESIGN FOR
COMBINATION CONCRETE CURB
AND GUTTER TYPE M3.12

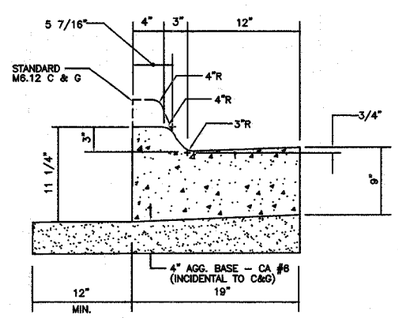

NOTE:
SUBJECT TO I.D.O.T. STANDARD SPECIFICATIONS
FOR COMBINATION CONCRETE CURB AND GUTTER

VILLAGE OF BRADLEY, IL.
CONSTRUCTION STANDARDS
FOR
TYPICAL M3.12 COMBINATION
CONCRETE CURB & GUTTER –
DETAIL
STANDARD# ST–070

TYPICAL TRENCH BACKFILL DETAIL
STORM & SANITARY SEWERS

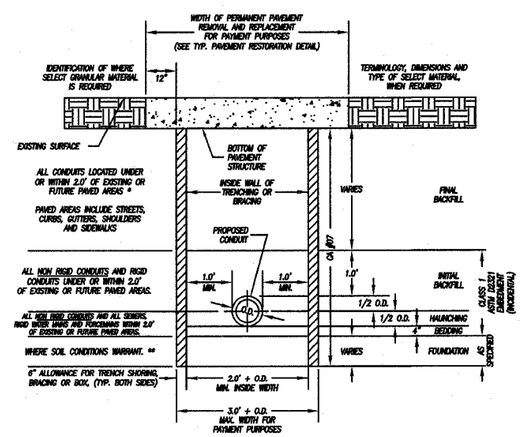

NOTE:
TRENCH BACKFILL SHOULD BE USED ON ALL TRENCHES UNDER AND WITHIN 2 ft OF PAVED AREAS AND IN ACCORDANCE WITH SECTION 208 OF THE "STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION"

TRENCH BOX SHALL NOT EXTEND BELOW TOP OF PIPE, HOWEVER IT SHALL NOT EXCEED 2.0' FROM THE BOTTOM OF THE TRENCH

NON RIGID CONDUITS ARE DEFINED AS FLEXIBLE THERMALPLASATIC PIPE AND/OR CORRUGATED METAL PIPE.

* INDICATES ELIGIBLE FOR PAYMENT AS BACKFILL SELECT GRANULAR OTHERWISE INCIDENTAL TO THE PIPE

** INDICATES ELIGIBLE FOR PAYMENT AS SELECT FOUNDATION MATERIAL

VILLAGE OF BRADLEY, IL.
CONSTRUCTION STANDARDS
FOR
TYPICAL TRENCH BACKFILL DETAIL
STORM & SANITARY SEWERS

STANDARD# STRM–2010

M. GINGERICH, GEREAUX & ASSOCIATES
240 N. Industrial Drive
Bradley, Illinois 60915
815-939-4921
FAX : 815-939-9810

REVISIONS

DATE	BY	DESCRIPTION
2/11/08	AJC/JWP	PER IDOT REVIEW

ILLINOIS DEPARTMENT OF TRANSPORTATION
DETAIL SHEET
CARDINAL DRIVE

SCALE:
DRAWN BY: MJO/AJC
DATE: 1/4/08
CHECKED BY: JWP